MPC

MITSUBISHI Service Manual

781

COLOR MONITOR

MODEL : RM 1404

XC-1404

XC-1404 CB

ALSO COVERS RESEARCH MACHINES

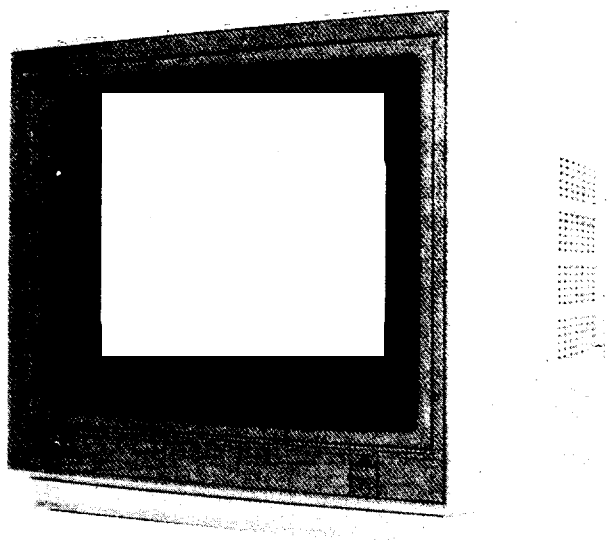

MITSUBISHI ELECTRIC

SAFETY PRECAUTIONS

NOTICE: Observe all cautions and safety related notes located inside the receiver cabinet and on the receiver chassis.

WARNING

1. Operation of the receiver, outside the cabinet or with the cover removed, involves a shock hazard from the receiver power supplies. Work on the receiver should not be attempted by anyone who is not thoroughly familiar with precautions necessary when working on high-voltage equipment.
2. Do not install, remove or handle the picture tube in any manner unless shatter-proof goggles are worn. People not so equipped should be kept away while the picture tube is being handled. Keep the picture tube away from the body while handling.

X-RADIATION WARNING

The surface of the picture tube may generate X-Radiation. Caution during service and, if possible, the use of a lead apron is recommended for shielding.

When replacing the picture tube, use only a designated replacement part since it is a critical component with regard to X-Radiation as noted above. (No high-voltage adjustments are provided.) The high-voltage specification is described on page 5.

LEAKAGE CURRENT CHECK

Before returning the receiver to the customer, it is recommended that the leakage current be measured according to the following methods.

1. Cold Check

   With the AC plug removed from the power source, place a jumper across the two AC plug prongs. Turn the receiver AC switch on. Using an ohm meter, connect one lead to the jumpered AC plug and touch the other lead to each exposed metal part (antennas, handle bracket, metal cabinet, screwheads, metal overlays, control shafts, etc.), particularly any exposed metal part having a return path to the chassis. Exposed metal parts having a return path to the chassis should have a minimum resistance reading of 1 megohm. Any resistance below this value indicates an abnormality which requires corrective action. Exposed metal parts not having a return path to the chassis will indicate an open circuit.

2. Hot Check

   The test sequence, with reference to the measuring circuit in Figure 1, is as follows:

   (1) With switch S1 open, the receiver is to be connected to the measuring circuit. Immediately after connection, the leakage current is measured using both positions of switch S2, and with the switching devices in the receiver in all of their operating positions.

   (2) Switch S1 is then to be closed, energizing the receiver, and immediately after closing the switch, the leakage current is to be measured using both positions of switch S2, and with the switching devices in the receiver in all of their operating positions.

   Current measurements of items (1) and (2) are to be repeated after the receiver has reached thermal stabilization.

   The leakage current shall not be more than 5 milliampere for USA, but in Europe, the current is limited less than 7.5 milliampere.

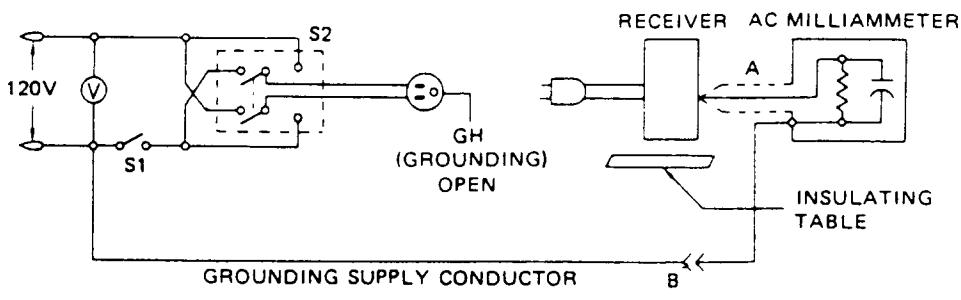

Figure 1

PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in a display monitor have special safety-related characteristics.

These characteristics are often not evident from visual inspection, nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this service manual.

Electrical components having such features are identified by shading on the schematic diagram and the parts list of this service manual and by marking on the supplementary sheet for this chassis to be issued subsequently. Therefore replacements for any safety parts should be identical in value and characteristics.

WARNING

Cut silicone seal between black socket guide and white socket prior to removing CRT socket PCB assembly.

CONTENTS

	Page
SPECIFICATIONS	5
THEORY OF OPERATION	6
DISASSEMBLY INSTRUCTIONS	9
BLOCK DIAGRAM	10
PARTS LOCATION	11
ALIGNMENT INSTRUCTIONS	13
1. General	13
2. +B4 Voltage Adjustment	13
3. Horizontal Deflection Circuit Alignment	13
4. Vertical Deflection Circuit Alignment	13
5. CRT Circuit Alignment	14
6. Focus Adjustment	14
7. ITC Alignment	14
TROUBLESHOOTING	17
CHASSIS WAVEFORMS	21
CABINET EXPLODED VIEW	21
SEMICONDUCTOR LEAD IDENTIFICATION	22
SERVICE PARTS LIST	23
SCHEMATIC DIAGRAM	25
P.C.BOARD (BOTTON VIEWS)	
DISPLAY PCB	26
CRT PCB	26
CONTROL PCB	26
EARPHONE JACK & LED PCB	26
TIMING CHART	27

SPECIFICATIONS

Description	Nominal	Limit
1 Power input	AC 100V ~ 240V–50/60Hz (AT-1332A–AC120V, 60Hz)	
2 Power consumption		70W Max.
3 Input signal		
a) R.G.B. Video	R.G.B. Separate T.T.L. Level, Positive	
b) Synchronous	T.T.L. Level Positive	
c) Intensity	T.T.L. Level, Positive	
4 Resolution		
a) Horizontal	640 dots	
b) Vertical	200 lines	
5 Display size	256(W) x 178(H) mm	
6 Retrace time		
a) Horizontal		12.0μs Max.
b) Vertical		1.0 ms Max.
7 Display color	16 colors	
8 High voltage	22.5 kV/0.5mA	22.5 ± 1 kV/0.5mA
9 Picture linearity		
a) Horizontal		10% Max.
b) Vertical		10% Max.
10 Synchronous (Pull in range)		
a) Horizontal		15.70 ± 0.2 kHz
b) Vertical		59.81 ± 3 Hz

THEORY OF OPERATION

1. RGB Drive Circuit

The RGB input signal with positive polarity is applied to the inverter IC201 and output by IC201 in the negative polarity. The signal is inverted to the positive polarity. by IC202 and applied to the base of RGB-Drive transistors Q6R1, Q6G1 and Q6B1.

The bias of RGB-Amp transistors are adjustable by BRIGHTNESS control (VR-291) and SUB-BRIGHT volume (VR201) connected to the base of BRIGHT control transistor Q203.

When the intensity signal is of negative polarity, the transistor Q201 is turned to OFF and the contrast can be adjusted by the CONTRAST control (VR-292).

2. RGB Beam Current Limiting Circuit

If the beam current increases, the cathode side of D505 will drop. So the base bias of Q204 will drop and the collector current will increase. As the result, the base voltages of Q203 decrease to limit the increase of the CRT current.

If the beam current reduces, the base voltage of Q203 increases to limit the reduction of beam currrent. In other words, the brightness of picture is maintained at a constant level.

3. RGB Output Circuit

The RGB signal is applied to the base of the RGB Output transistors Q6R2, Q6G2 and Q6B2 through the RGB Drive transistors Q6R1, Q6G1 and Q6B1. Since the circuit is connected to the CRT, the structure is so designed to accept adjustment of RGB-Cutoff volume VR6R2, VR6G2 and VR6B2.

Correct white balance is obtained by adjusting RB-Drive volume VR6R1 and VR6B1. Blanking pulse is applied to the emitter of Q6R2, Q6G2 and Q6B2 through Blanking-1, -2 and -3 transistors Q403, Q601 and Q602.

4. Vertical Deflection Circuit

The vertical sync. signal with positive polarity is applied to pin 11 of the vertical and horizontal IC (IC401).

Pin 10 of IC401 is connected to the vertical oscillator circuit and the frequency of the oscillator can be controlled by the voltage of pin 10 which can be varied by V.HOLD Volume (VR404).

The oscillator output is fed to the vertical drive circuit and its output derived from pin 7 is applied to the vertical output.

The vertical output employs a SRPP (Shunt Regulated Push-Pull) circuit consisting of two transistors Q401 and Q402.

The saw-tooth wave is applied to pin 8 of IC401 as an A.C. feed-back.

The emitter circuit of Q401 is controlled by HEIGHT Volume (VR403) to vary the vertical size of the raster.

Linearity adjustment is done by integrating the saw-tooth voltage.

V.LIN Volume (VR402) is a variable resistor for vertical linearity adjustment.

Vertical position is determined by the amount of D.C. component flowing through the vertical deflection coil. The amount can be varied by changing the position of V-CENT (S491).

5. Horizontal Oscillator, AFC and Drive Circuit

The horizontal sync. signal with negative polarity is applied to pin 14 of IC401 through IC202.

The saw-tooth wave of horizontal frequency is produced by integrating the horizontal pulse from FBT (T503), and is fed to pin ① of IC401 for AFC. The phase of horizontal saw-tooth wave is compared with that of horizontal sync. signal from pin 14 at AFC circuit inside the IC401.

H. PHASE control (VR501) determines the relative position of raster and picture.

The horizontal oscillation frequency can be controlled by H. HOLD Volume VR502 connected to pin ③.

The horizontal frequency oscillated is obtained from pin ④ of IC401, and is fed to the next horizontal drive circuit. The pulse switching mode of the driver and output stage is of reverse polarity type; that is, when the driver transistor is ON, the output transistor is OFF.

6. Horizontal Output Circuit

In the horizontal output circuit, deflection current is supplied to the horizontal deflection coil and, at the same time, pulses for blanking, for CRT heater voltage and for D.C. voltages, are generated in the flyback transformer (T503).

The Figure A below shows the basic circuit of a horizontal output circuit. In this circuit, the transistor goes on and off according to the base current and it functions as one switch together with the damper diode connected parallel to it. Thus, the equivalent circuit becomes like the one shown in Figure B. In the actual circuit, the damper diode D is not provided. The base-collector junction of H.OUT transistor plays the role of the damper diode.

The performance is explained hereafter with reference to Figure B and the waveforms at various parts of the circuit shown in Figure C. When switch S is closed at t_1, the current I_Y which flows through the deflection yoke L_Y increases linealy with time. When I_Y reaches a certain value, switch S is opened at $t=t_2$, and switch current I_S becomes zero at once, but I_Y does not become zero instantly and flows into capacitor C, resulting in a ring. After a half cycle of ringing, yoke current I_Y reaches the negative maximum level at t_3 time. If at this time, the switch S is closed again, ringing stops and the current flowing through the deflection yoke decreases linearly to zero. Thus one cycle is completed. During $t_1 \sim t_2$, energy flows out of the power source but, at t_3, energy returns to the power source. Thus the power loss in the circuit is extremely small. The time from $t_2 \sim t_3$ is the retrace period, which is determined by the resonant frequency of L_Y and C.

During the period of $t_2 \sim t_3$, the deflection yoke current I_Y changes from the positive peak to the negative peak and, during this period, the voltage of C becomes maximum as shown in figure C(f). When the retrace period is set at about 1/5 the horizontal scanning period, the amplitude of this pulse voltage will become 7 to 8 times that of the power supply voltage. The said peak level of pulse voltage is expressed by the following formula;

$$V_{cp} \propto \frac{Vcc}{\sqrt{L_Y C}}$$

The output transistor used for switching should be able to withstand this pulse voltage.

H. WIDTH control (L552) is variable inductance which enables adjustment of raster horizontal size.

Horizontal position of the raster can be adjusted by changing the position of H. CENT (S591) which can switch the direction of D.C. current flow in the defleciton yoke.

Focus and Screen voltage for the CRT is produced by dividing the anode voltage.

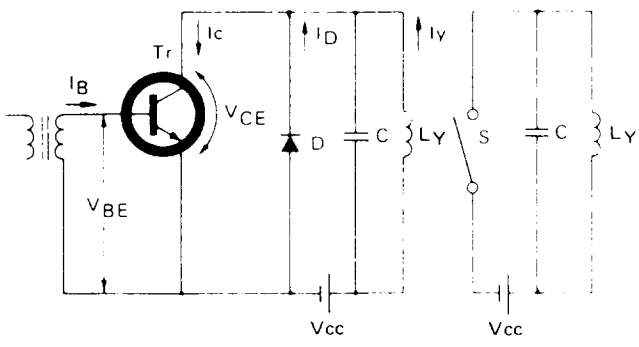

Figure A Figure B

Horizontal Output Circuit

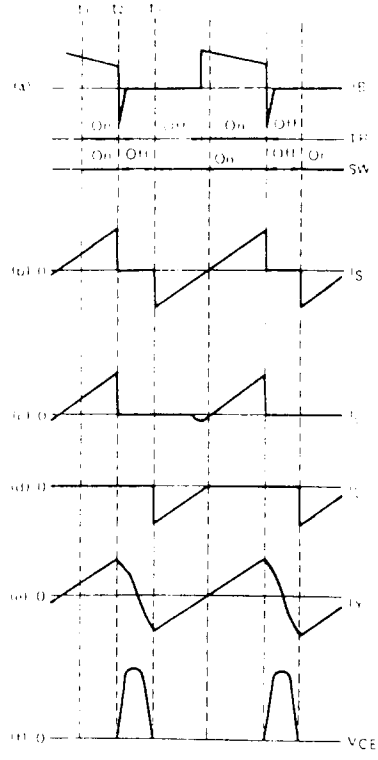

Figure C

Waveform in Horizontal Output Circuit

7. **High Voltage Hold-Down Circuit**

If a failure occurs which causes an increase in high voltage (such as an opened sweep capacitor or failed power regulator), then the pin ⑤ voltage of IC401 will increase through FBT (T503).
When this happens, the oscillator signal coming from IC401 through R508 can no longer drive Q501, turning off the high voltage. Therefore, to restart the oscillator and the high voltage, the television set must be turned off and then turned on again.

8. **Power Source Circuit**

The chassis (secondary side) is insulated from the power source (primary side) by the transformer T931 for switching power source. By the winding of the transformer T931 connected to the collector circuit and the other winding connected to the base circuit, the transistor in the control IC (IC991) is submitted to positive feed back and operates as a blocking oscillator.
The operating freqeuncy is determined in around 16 to 20 KHz by the primary winding of T931. Changes in the power source voltage and in the load current are detected by the winding and the voltage is applied to pin ④ of IC991.
When the voltage applied to pin ④ changes, the conducting time of the transistor in IC991 changes to compensate for the change in the secondary output voltage of T931 and to stabilize the output voltage.

9. **Display Color**

I	R	G	B	COLOR
0	0	0	0	BLACK
0	0	0	1	BLUE
0	0	1	0	GREEN
0	0	1	1	CYAN
0	1	0	0	RED
0	1	0	1	MAGENTA
0	1	1	0	BROWN
0	1	1	1	GRAY 1 (BRIGHT)
1	0	0	0	GRAY 2
1	0	0	1	LIGHT BLUE
1	0	1	0	LIGHT GREEN
1	0	1	1	LIGHT CYAN
1	1	0	0	LIGHT RED (PINK)
1	1	0	1	LIGHT MAGENTA
1	1	1	0	YELLOW
1	1	1	1	WHITE

DISASSEMBLY INSTRUCTIONS

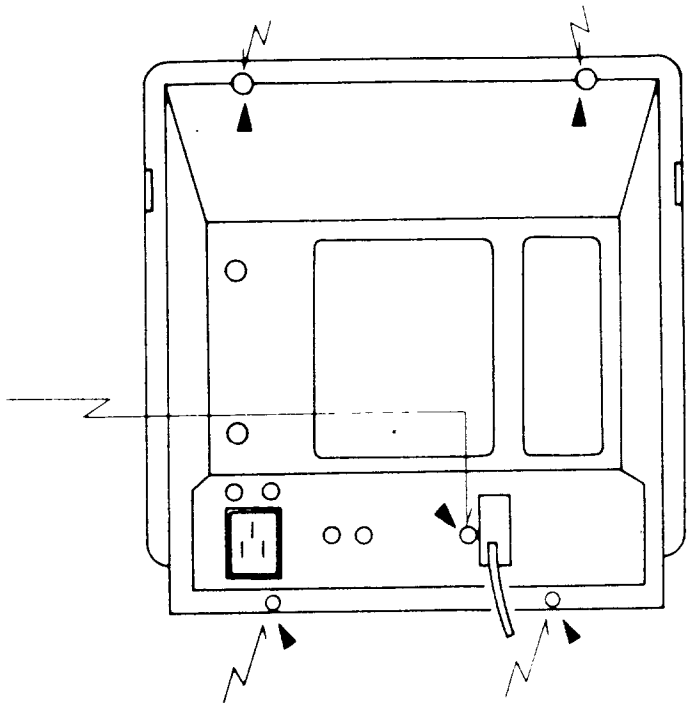

NOTE: Remove only the screws marked with an arrow.

BLOCK DIAGRAM

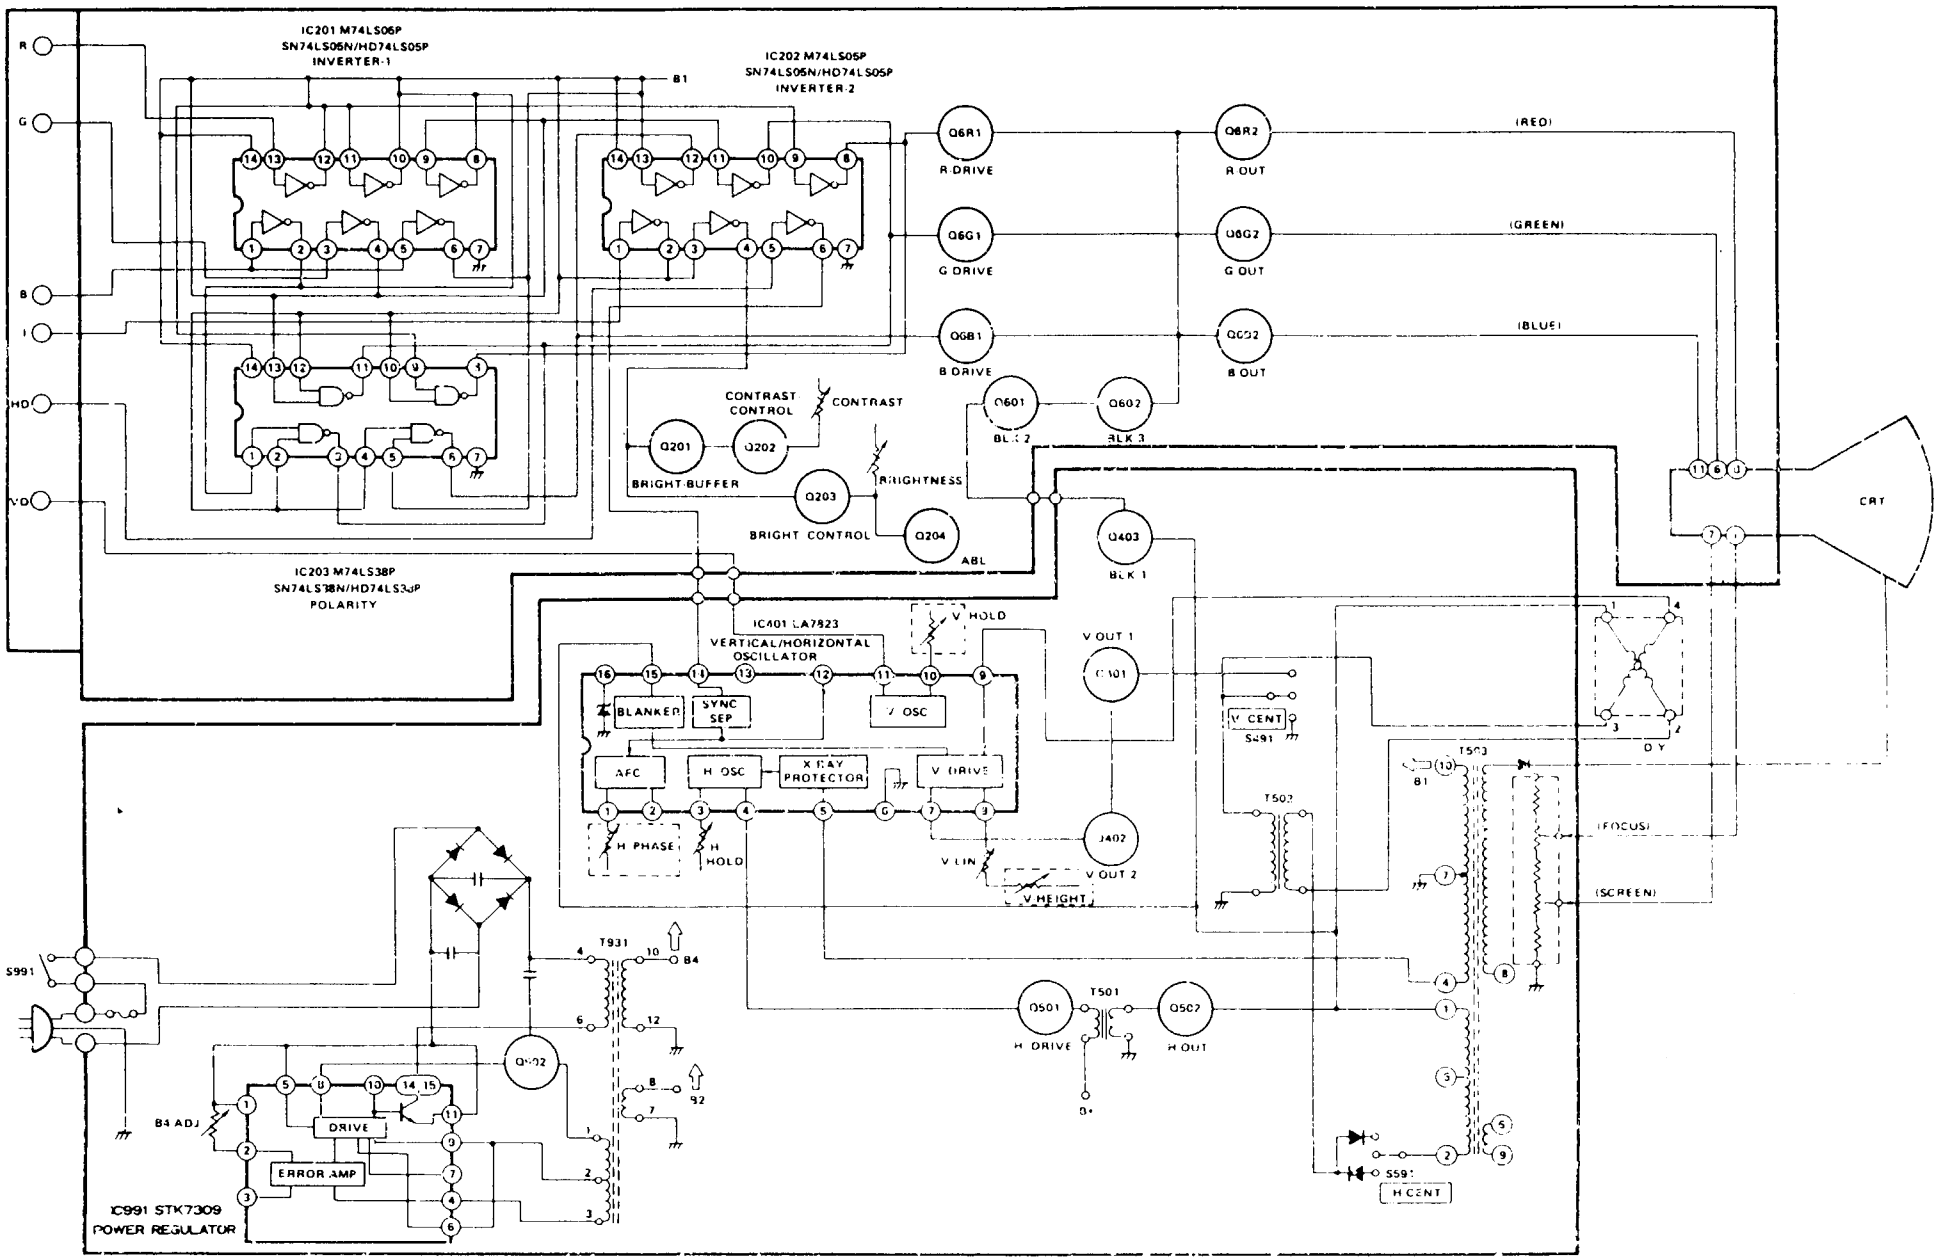

PARTS LOCATION

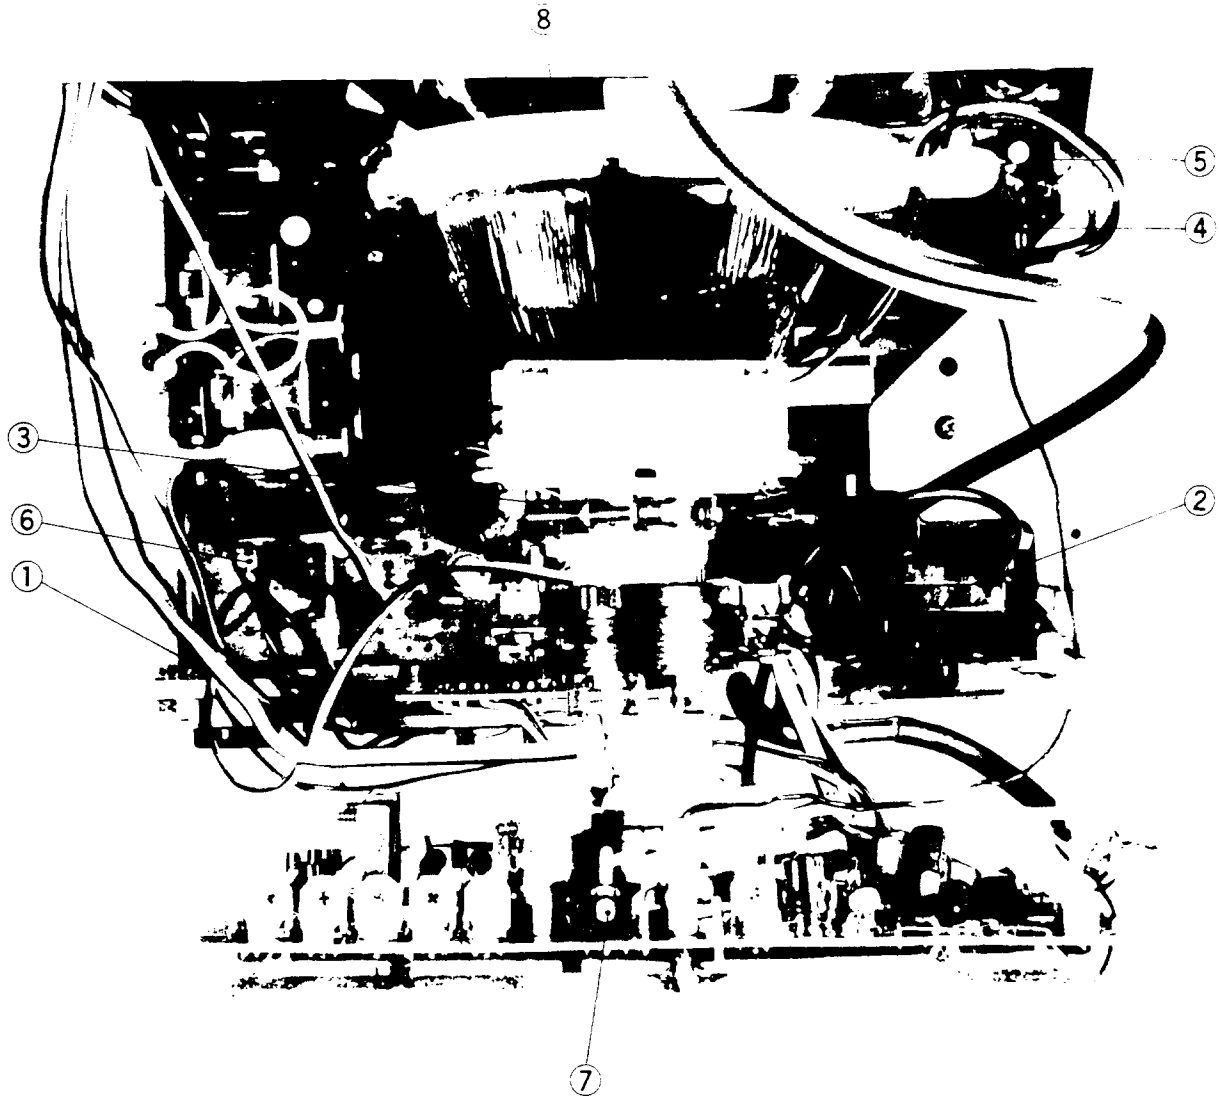

①	DISPLAY P.C. BOARD	⑤	H. CENTER SWITCH
②	FLYBACK TRANSFORMER	⑥	FUSE, 3.15A
③	POWER TRANSFORMER	⑦	SERVICE SWITCH
④	V.CENTER SWITCH	⑧	DEFLECTION YOKE

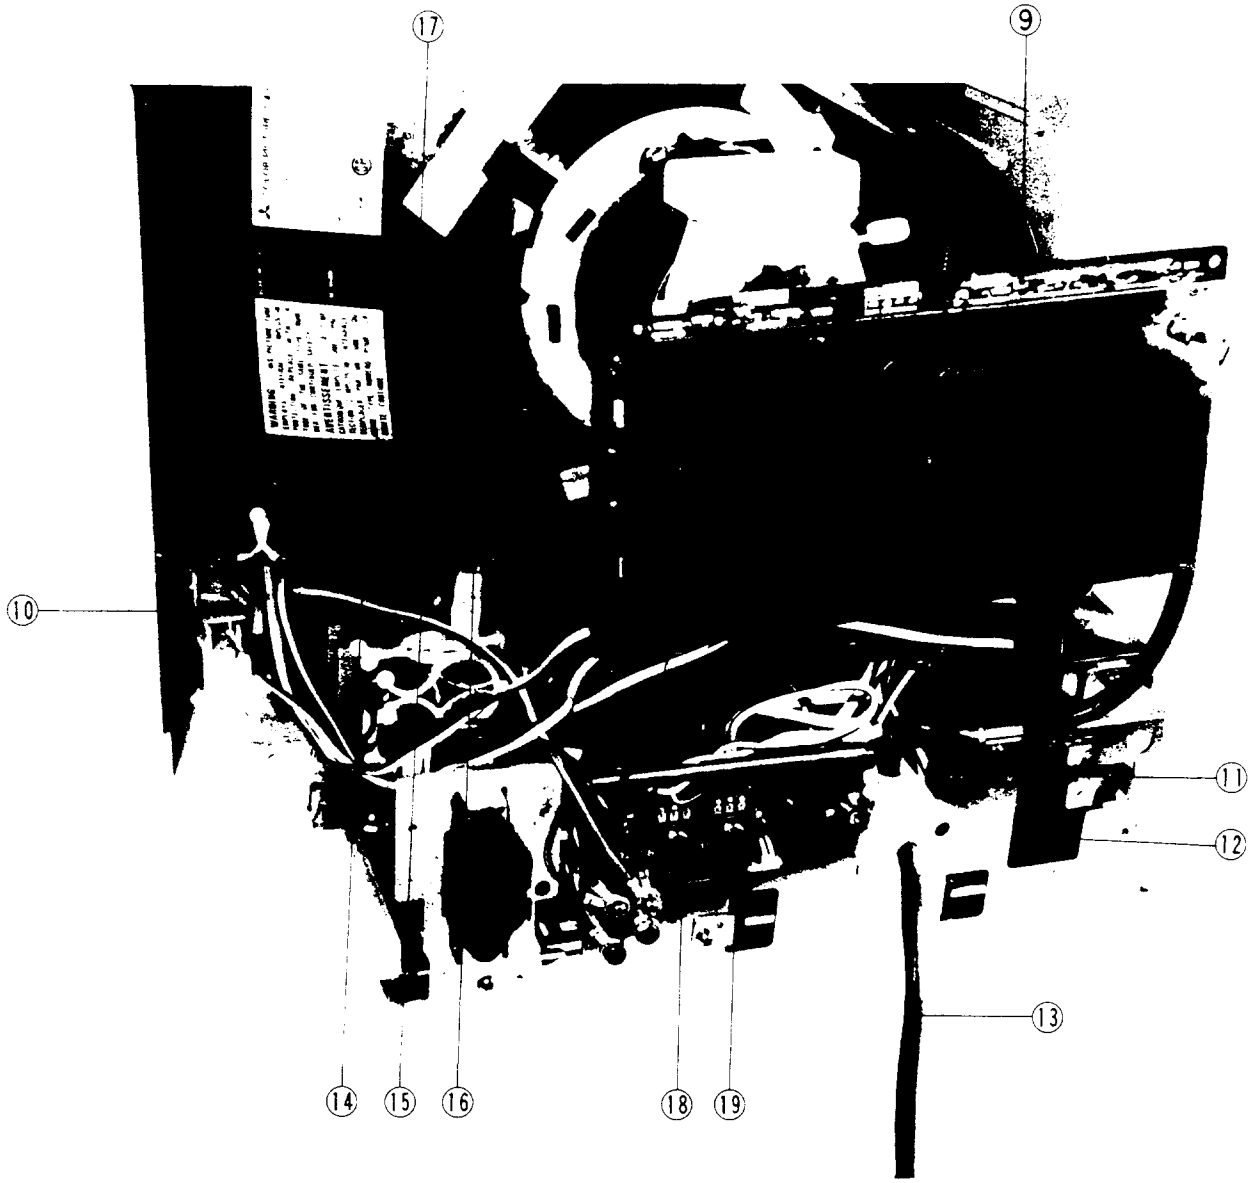

⑨ CRT P.C. BOARD
⑩ POWER SWITCH
⑪ FOCUS CONTROL
⑫ SCREEN CONTROL
⑬ INPUT TERMINAL
⑭ BRIGHTNESS CONTROL
⑮ CONTRAST CONTROL
⑯ H. PHASE CONTROL
⑰ CRT
⑱ V. HEIGHT
⑲ V. HOLD

ALIGNMENT INSTRUCTIONS

1. General

(1) Supply Voltage: Nominal voltage

(2) Signal: R.G.B. (Positive, Default), HD, VD (Positive, Default), Intensity (Positive, Default)
fH = 15.70 KHz, fV = 59.81 Hz
Should comply with compatible computer.

2. +B4 Voltage Adjustment

(1) Receive a white pattern signal (Chroma-clear or white raster).

(2) Set CONTRAST and BRIGHTNESS controls (VR292, VR241) at maximum position.

(3) Make sure the AC power supply voltage is at the specified value.

(4) Connect a DC voltmeter of 150V full scale between the test points TP-9Z (+) on the DISPLAY PCE chassis ground (−).

(5) Adjust B4-ADJ volume (VR901) on the DISPLAY PCB for a 115 ± 1V reading on the meter.

3. Horizontal Deflection Circuit Adjustment

3.1 Horizontal Oscillation Circuit Adjustment

(1) Receive a white pattern signal (Chroma-clear or white raster).

(2) Short circuit TP-8A and TP-8B.

(3) Turn the H. HOLD volume (VR502) slowly, starting from higher horizontal frequency (right si until the picture almost becomes still (synchronized).

(4) Release short circuit (2) above.

3.2 Horizontal Position Adjustment

(1) Receive a border pattern signal.

(2) Set the H. Cent switch (S591) so that the raster is positioned at almost the center of the CRT scr

Notes: 1. This adjustment should be done after ITC adjustment.
2. During this adjustment, H. PHASE control (VR591) should be at the mid-position.

3.3 Horizontal Width Adjustment

(1) Receive a gray-1 pattern signal (Chroma-clear or white raster).

(2) Set CONTRAST and BRIGHTNESS controls (VR292, VR291) at their maximum positions.

(3) Adjust H.WIDTH control (L552) so that a white pattern width becomes 256 ± 8 mm.

4. Vertical Deflection Circuit Alignment

4.1 Vertical Oscillation Circuit Adjustment

(1) Receive a white pattern signal. (Chroma-clear or white raster)

(2) Turn V.HOLD volume (VR401) clockwise as far as it will go.

(3) Then turn the V.HOLD volume (VR401) slowly counterclockwise so that the pattern bec (synchronized) and continue to turn by 30 degrees at a time.

4.2 Vertical Linearity Adjustment

(1) Receive a cross-hatch pattern signal.

(2) Adjust HEIGHT volume (VR403) so that the height becomes 80% of the display area of the CRT

(3) Adjust V.LIN volume (VR402) to get optimum linearity.

4.3 Height Adjustment

(1) Receive a gray-1 pattern signal.

(2) Adjust HEIGHT volume (VR403) so that the height of the pattern becomes 178 ± 5 mm.

4.4 Vertical Position Adjustment

(1) Receive a border pattern signal.

(2) Set the V.CENT switch (S491) at the appropriate position so that the raster is positioned at almost the center of the CRT screen.

5. CRT Circuit Alignment

(1) Receive a white pattern signal (Chroma-clear or white raster).

(2) Turn CUTOFF volume (VR6R2, VR6G2, VR6B2) and SCREEN control counterclockwise as far as they will go.

(3) Set DRIVE volume (VR6R1, VR6B1) at the mechanical center.

(4) Set CONTRAST AND BRIGHTNESS controls (VR292, VR291) at their maximum positions.

(5) Set the SERVICE switch (S691) to the service position.

(6) Adjust the SCREEN control slowly so that either a red, green or blue horizontal line begins to shine.

(7) Adjust CUTOFF volume (VR6R2, VR6G2, VR6B2) of not appearing R,G or B so that a white horizontal line shines slightly.

(8) Set the SERVICE switch (S691) back to its normal position.

(9) Adjust DRIVE volume (VR6R1, VR6B1) for standard white. If necessary, a color analyzer may be used.

(10) Turn the CONTRAST and BRIGHTNESS controls (VR292, VR291) to its maximum position.

(11) Connect (+) terminal of 1 mA DC ammeter to the TP-9Z and (−) terminal to the TP-1Z.

(12) Adjust SUB-BRIGHT volume (VR201) so that the ammeter reads 550 ± 20uA.

6. Focus Adjustment

(1) Receive a characters pattern signal.

(2) Set CONTRAST and BRIGHTNESS controls (VR292, VR291) at their maximum positions.

(3) Adjust the FOCUS control on the FBT BLOCK to get optimum focus.

Note: This adjustment should be done after the completion of SUB-BRIGHT volume (VR201) adjustment.

7. ITC Alignment

Receive a white pattern signal (Chroma-clear or white raster) and allow the regular beam current to flow through it for at least 30 minutes. Place the unit so that it faces east or west and degauss thoroughly the CRT face, chassis, etc. with a degaussing coil.

7.1 Purity and Convergence Adjustment

A) Procedure

(1) Remove the deflection yoke and the rubber wedges from the picture tube cone, taking care not to strike or scratch the cone surface.

(2) Clean the remaining cement off the deflection yoke and the surface of the picture tube cone.

(3) Put the deflection yoke on the neck of the picture tube, fully forward against the cone of the CRT.

(4) Put the Convergence-Purity Assembly on the neck of the picture tube so that the distance between the 6-pole magnet and the base of the tube is 36 mm (1-7/16 inches), as shown in Figure 1, and hand-tighten the screw.

(5) Demagnetize the front and sides of the picture tube with a degaussing coil.

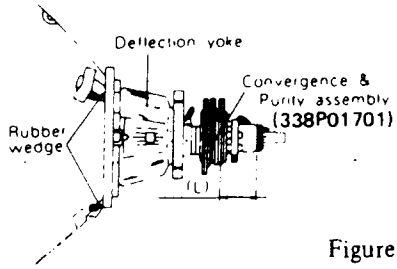

Figure 1

	(L)
370MLB22E 370MLB22-DE	36mm(1-7/16inches)



Figure 2

B) Preliminary Adjustment

1. Purity
   (1) Produce a yellow raster by short-circuiting the base and emitter of Q6B2 (B-OUT) with a sho lead. (Another method; Primary color pattern signal can be generated by compatible computer
   (2) With the deflection yoke positioned fully forward, adjust the purity magnet so that the yellow b is at the center of the screen with normal vertical centering.
   (3) Slide the deflection yoke slowly backwards to produce a uniform yellow raster (Figure 2).
   (4) Produce the primary color rasters – red, green and blue – and make sure no contamination is ol served for each color.
   To produce a red raster, short-circuit the base and emitter Q6G2 (G-OUT) and Q6B2 (B-OUT with two short leads. To produce green and blue primary colors, short-circuit the base and emitt of Q6R2 (R-OUT) and Q6B2 , or Q6R2 and Q6G2, with two short leads.
   Temporarily fasten the deflection yoke.
2. Static Convergence
   (1) Set the CONTRAST control (VR292) to its minimum position (fully counterclockwise). If nece sary, adjust the BRIGHTNESS control (VR291).
   (2) Adjust the two 4-pole magnets to converge red and blue vertical and horizontal lines at the center the screen.
   (3) Adjust the two 6-pole magnets to converge the red and blue lines on green (Figure 3).
3. Focus
   If necessary, adjust focus. Be certain focus is optimum throughout the entire screen.

C) Regular Adjustment

1. Purity
   (1) Produce a yellow raster by short-circuiting the base and the emitter of Q6B2 (B-OUT) with a sho lead.
   (2) Loosen the deflection yoke screw and move it forward. Make certain that the yellow bar is at th horizontal center. If necessary, adjust purity magnets to center it.
   (3) Slide the yoke backwards to produce a uniform yellow raster (Figure 4).
   (4) Using the same procedure as for Preliminary Adjustment, produce a red, blue, and green primar color raster and make sure no contamination is observed for each color.
   (5) If necessary, repeat the above steps.
   (6) Tighten the yoke in position.
2. Static Convergence
   (1) Tune receiver to a cross-hatch signal.
   (2) Set the CONTRAST control (VR292) to minimum. If necessary, adjust the BRIGHTNESS contro (VR291).
   (3) Adjust the 4-pole magnets to converge red and blue vertical and horizontal lines at the center of th screen (Figure 5).
   (4) Adjust the 6-pole magnets to place the red and blue converged lines on the green line.
   (5) If necessary, repeat steps (3) and (4) above.

Note:

- Adjustment of the 4-pole magnets affects red and blue beams, moving them an equal distance in opposite directions.
- Adjustments of the 6-pole magnets affects red and blue beams, moving them an equal distance in the same direction.
- The degree of the angle between the tab on the 4-pole magnet and that on the 6-pole magnet controls the amount of beam movement.
- Rotation of the 4 and 6-pole magnets together controls the direction of beam movement.

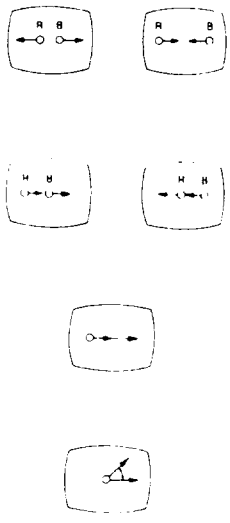

Figure 3



Figure 4

Note:

When adjusting the deflection yoke position, never touch any portion of the yoke other than the screw. Do not touch the purity ring magnets unless absolutely necessary, in which case carry out preliminary purity adjustment procedures again. Then remove the shorting lead across the base and emitter of Q6R2, Q6G2 and Q6B2. Otherwise, abnormal tint will occur on color programs.

3. Periphery of Convergence

(1) Observe the horizontal lines at the center of the screen. If the red and blue horizontal lines have shifted when crossing the green horizontal lines, as shown in Figure 6, converge by vertically swinging the yoke. Then confirm that the vertical lines at the center of the screen are also converged.

(2) Observe the vertical lines at the left and right center of the screen, as shown in Figure 7.
If red or blue has shifted against green, converge it by swinging the yoke horizontally. Then confirm that the horizontal lines both at the top and bottom centers of the screen are also converged.

(3) Insert three rubber wedges between the picture tube cone surface and the deflection yoke, as indicated in Figure 8, so that no space remains.

(4) Observe the entire screen and make sure convergence adjustment is completed. If necessary, change the positions of the wedges and repeat steps (1) and (2) above.

(5) After positioning the wedges, gently turn each wedge over and strip the tape from the rear to expose the adhesive material, then replace each wedge so that they adhere to the picture tube cone.

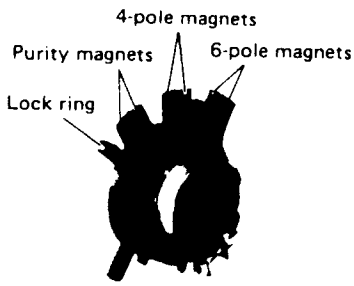

Figure 5

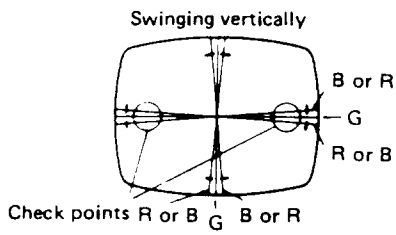

Figure 6



Figure 7



Figure 8

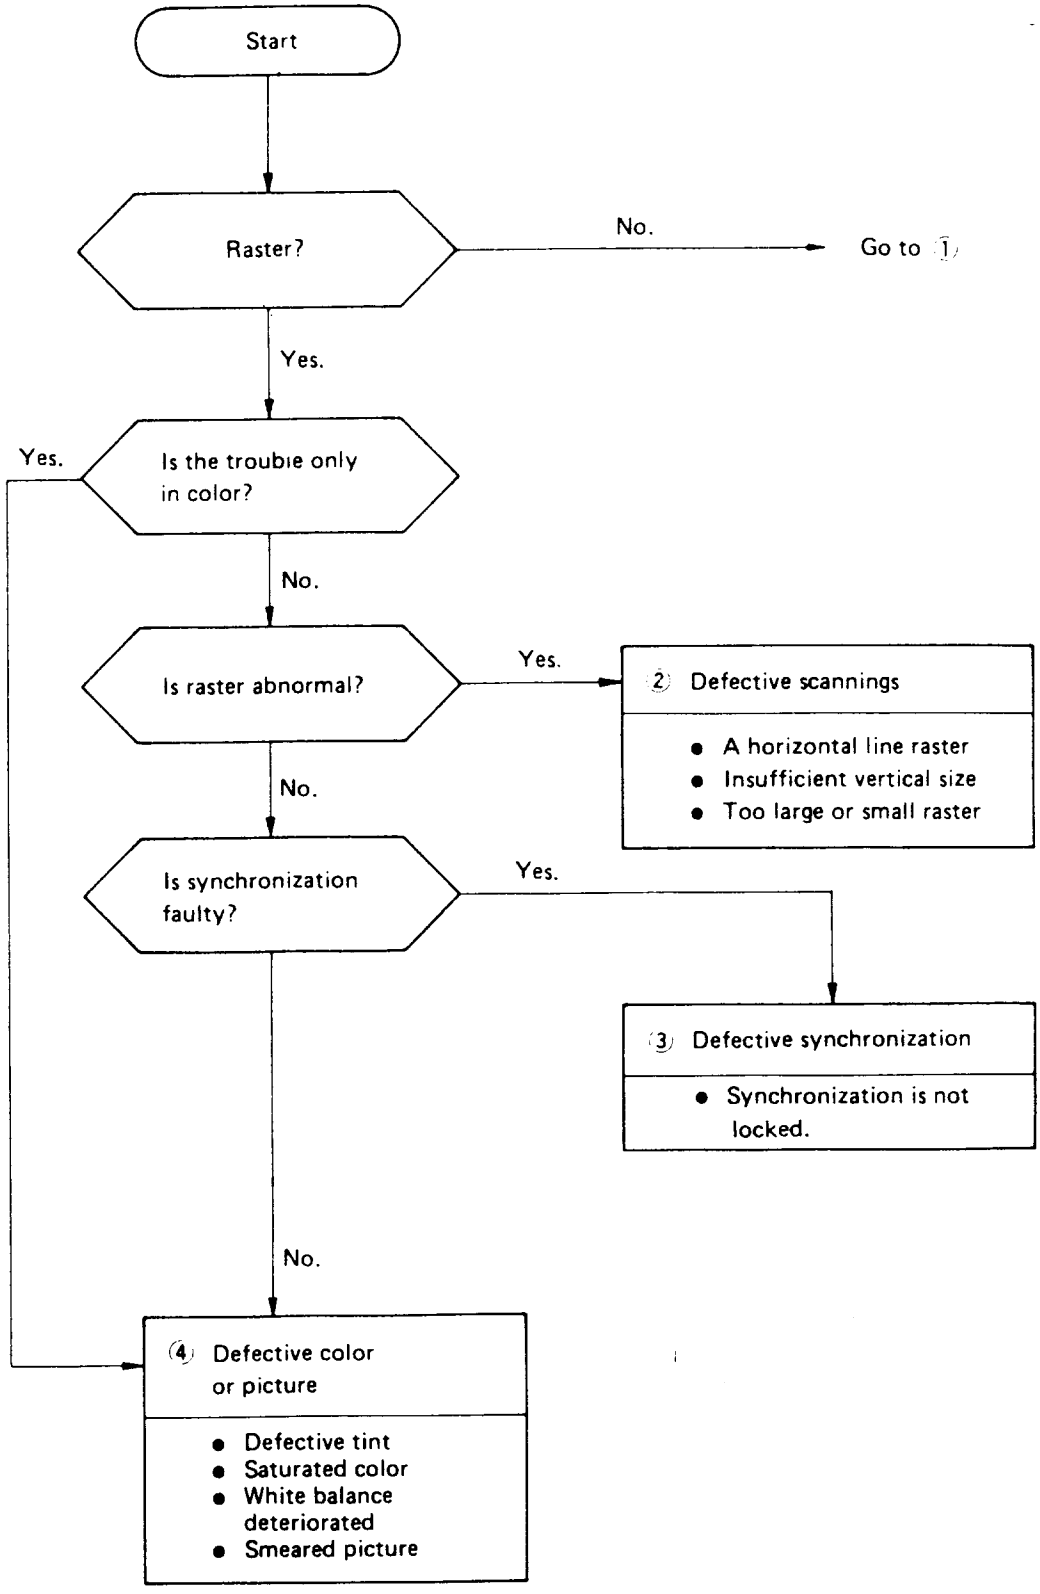
Start
Raster?
No.
Go to (1)
Yes.
Yes.
Is the trouble only in color?
No.
Is raster abnormal?
Yes.
(2) Defective scannings
• A horizontal line raster
• Insufficient vertical size
• Too large or small raster
No.
Is synchronization faulty?
Yes.
(3) Defective synchronization
• Synchronization is not locked.
No.
(4) Defective color or picture
• Defective tint
• Saturated color
• White balance deteriorated
• Smeared picture

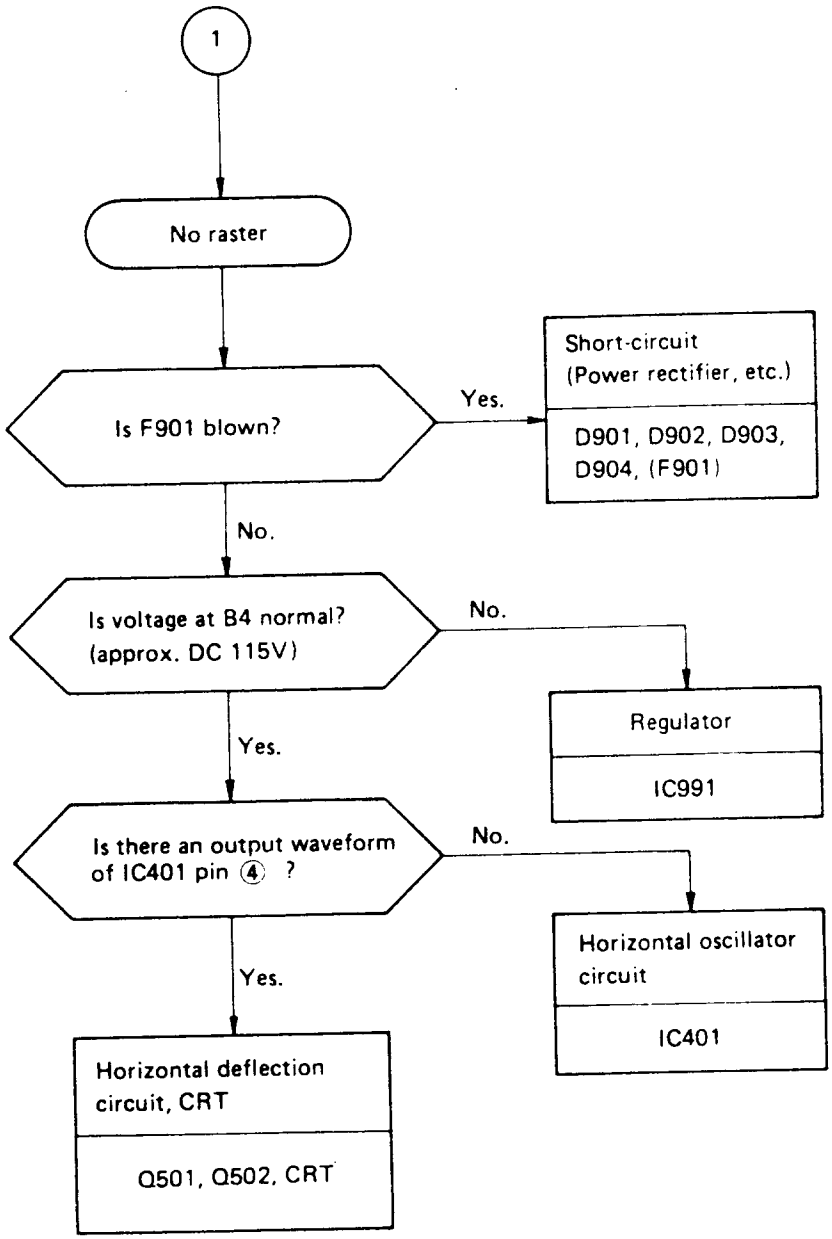
1
No raster
Is F901 blown?
Yes.
Short-circuit
(Power rectifier, etc.)
D901, D902, D903,
D904, (F901)
No.
Is voltage at B4 normal?
(approx. DC 115V)
No.
Regulator
IC991
Yes.
Is there an output waveform
of IC401 pin ④ ?
No.
Horizontal oscillator
circuit
IC401
Yes.
Horizontal deflection
circuit, CRT
Q501, Q502, CRT

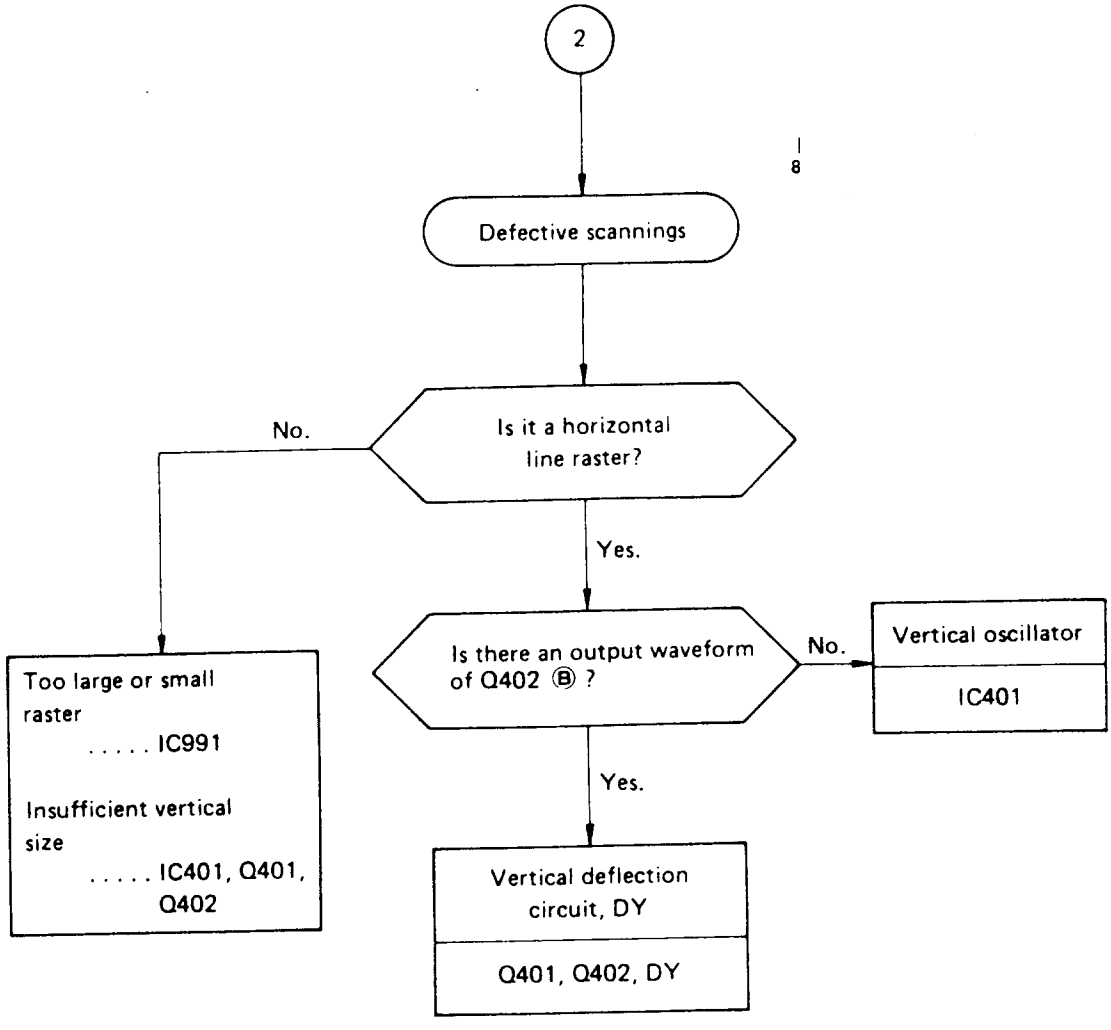
2
Defective scannings
Is it a horizontal line raster?
No.
Yes.
Too large or small raster
. . . . . IC991
Insufficient vertical size
. . . . . IC401, Q401, Q402
Is there an output waveform of Q402 Ⓑ ?
No.
Vertical oscillator
IC401
Yes.
Vertical deflection circuit, DY
Q401, Q402, DY

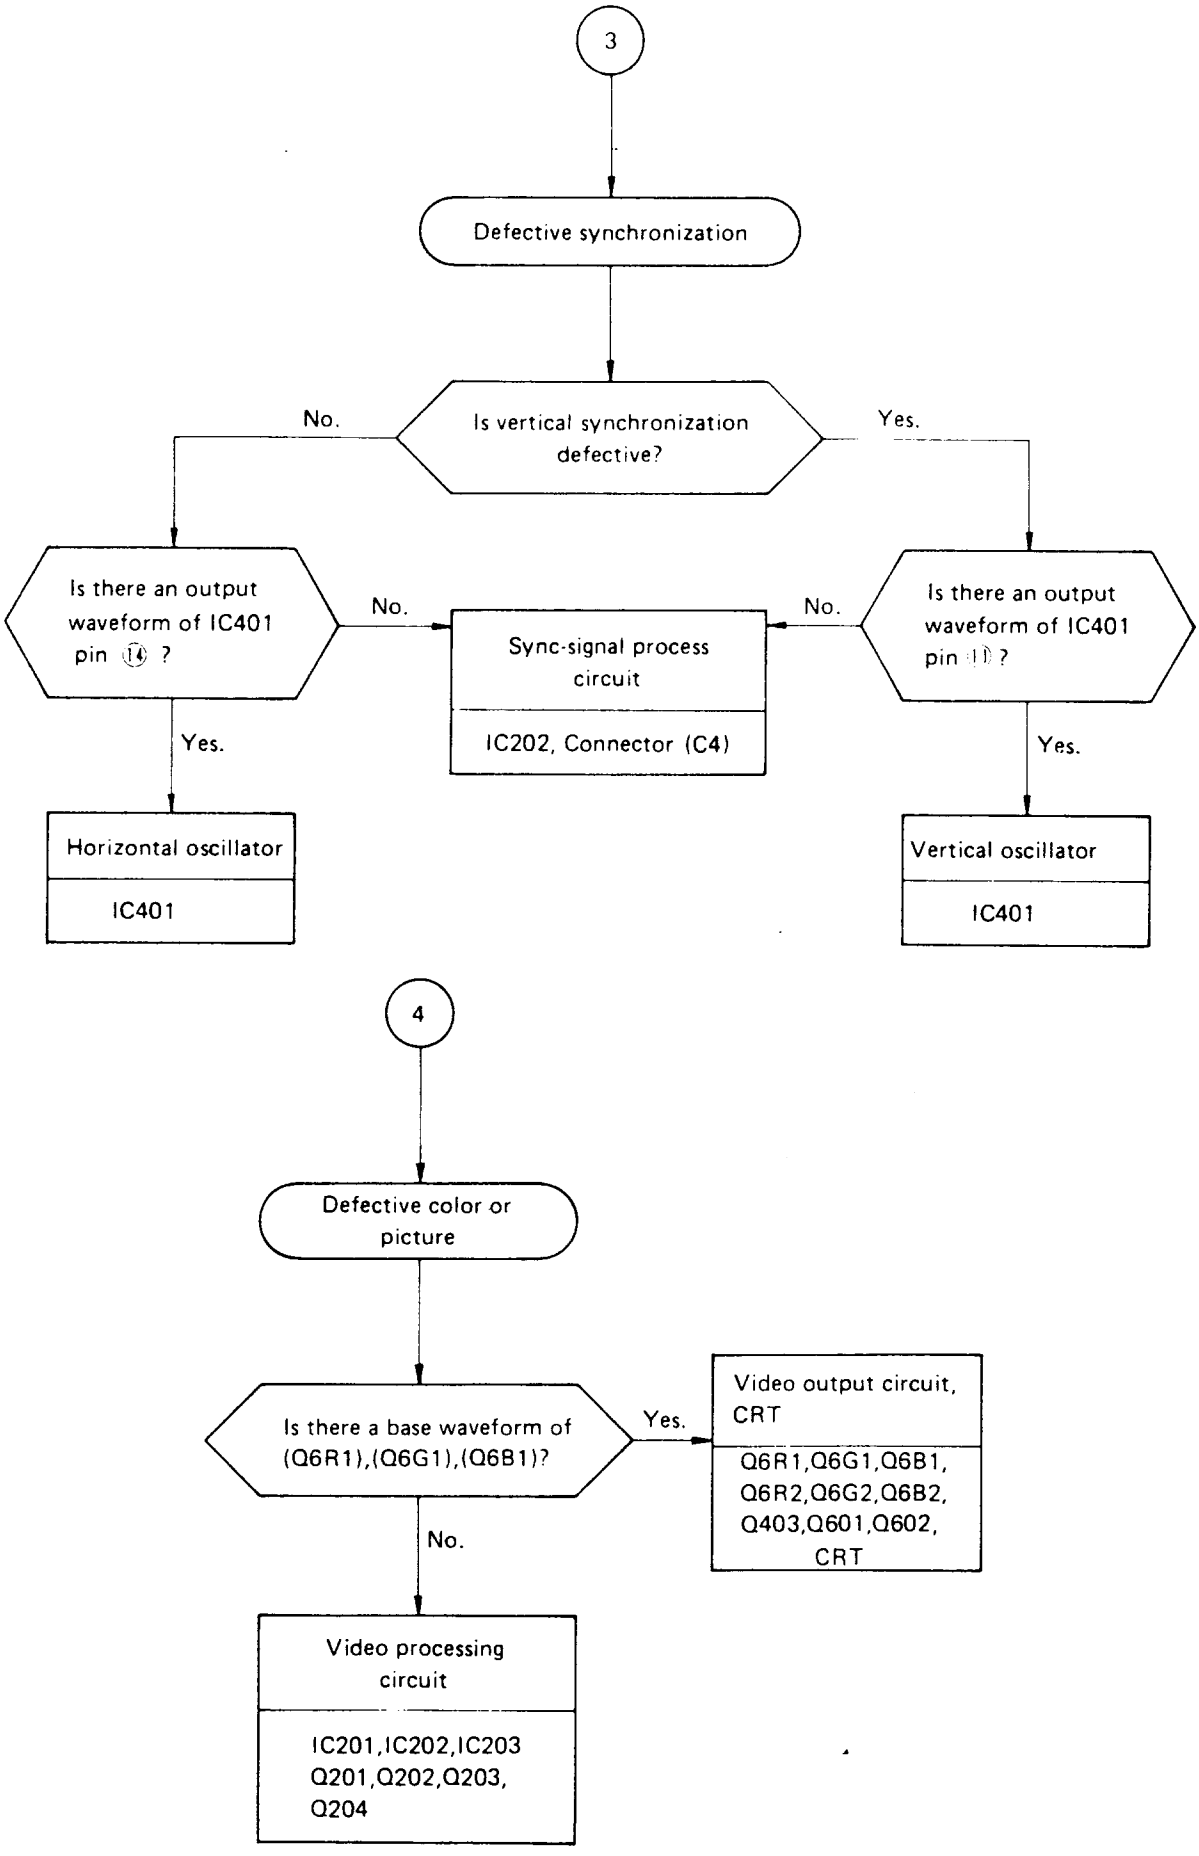
3
Defective synchronization
Is vertical synchronization defective?
No.
Yes.
Is there an output waveform of IC401 pin (14) ?
No.
Sync-signal process circuit
IC202, Connector (C4)
No.
Is there an output waveform of IC401 pin (11) ?
Yes.
Horizontal oscillator
IC401
Yes.
Vertical oscillator
IC401
4
Defective color or picture
Is there a base waveform of (Q6R1),(Q6G1),(Q6B1)?
Yes.
Video output circuit, CRT
Q6R1,Q6G1,Q6B1, Q6R2,Q6G2,Q6B2, Q403,Q601,Q602, CRT
No.
Video processing circuit
IC201,IC202,IC203 Q201,Q202,Q203, Q204

CABINET EXPLODED VIEW

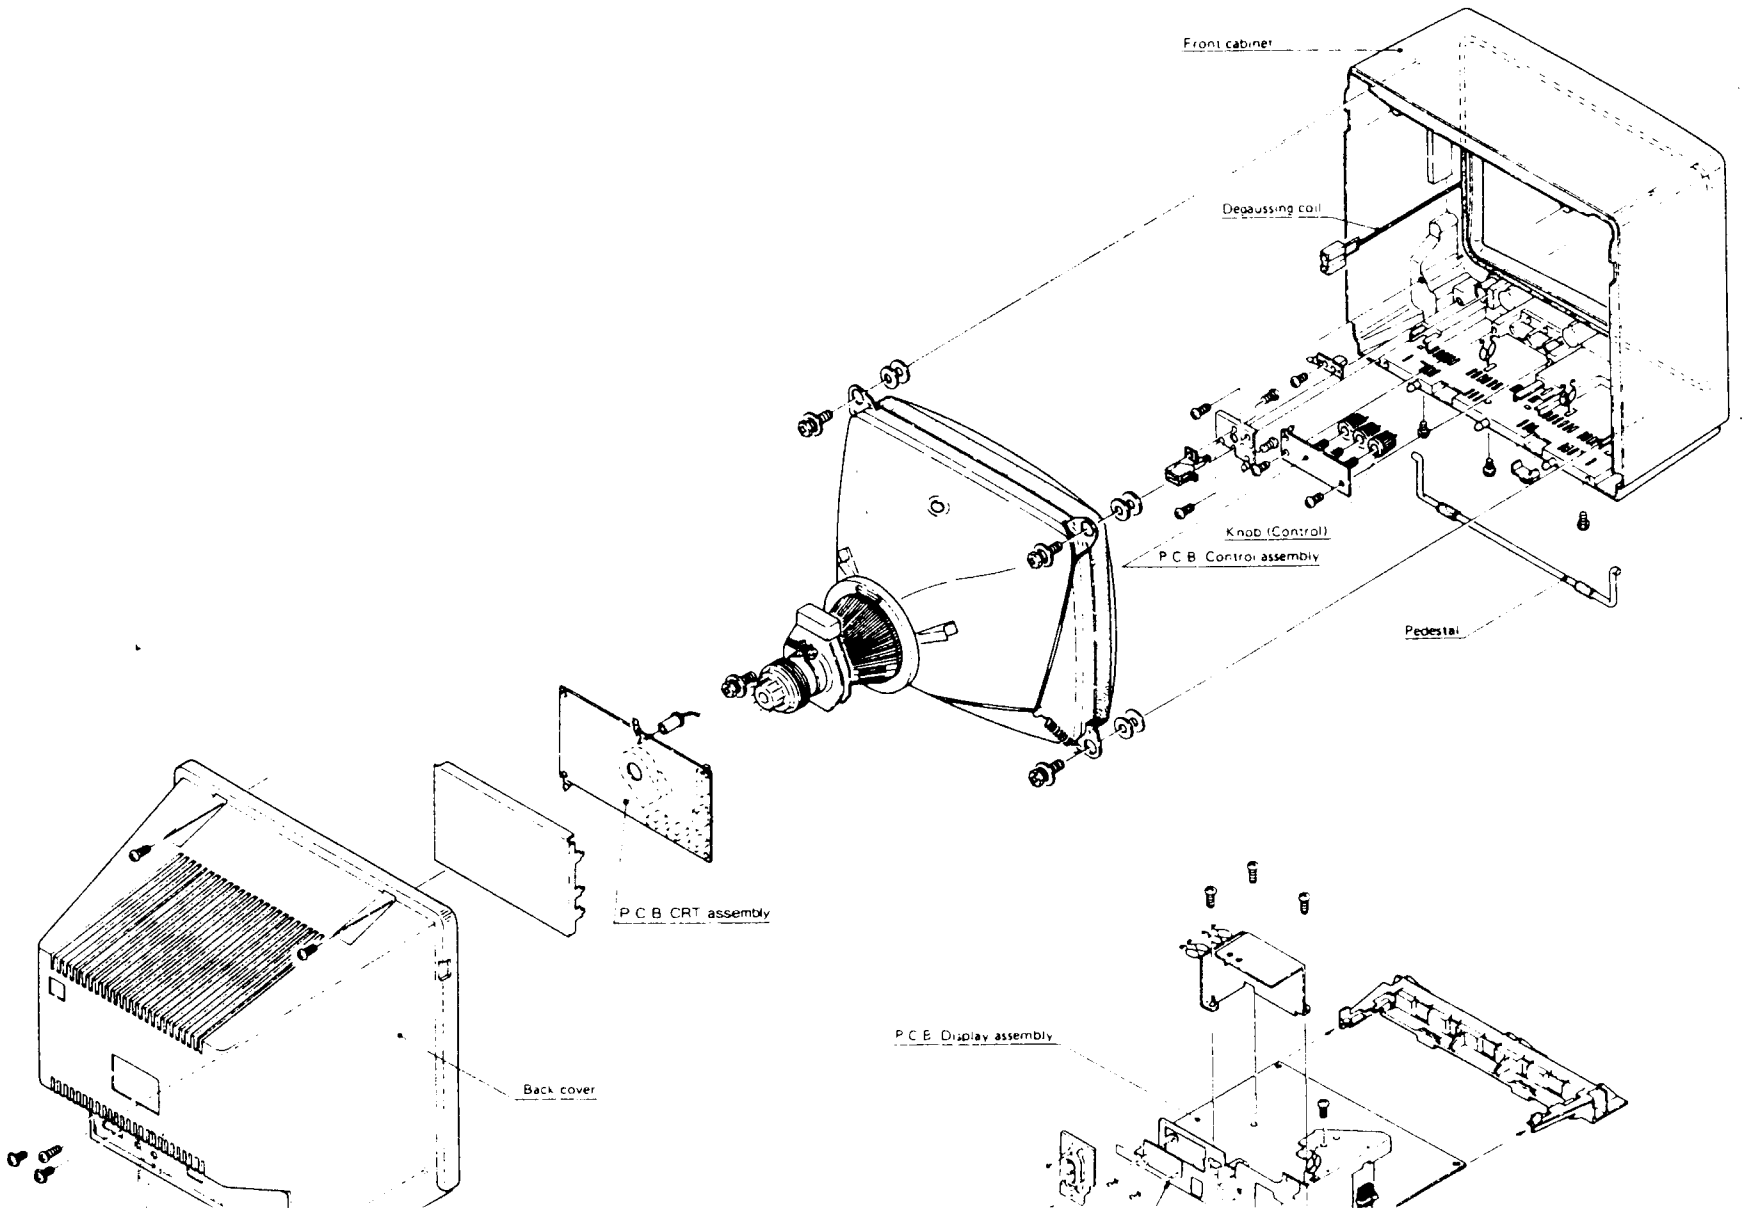

CHASSIS WAVEFORMS

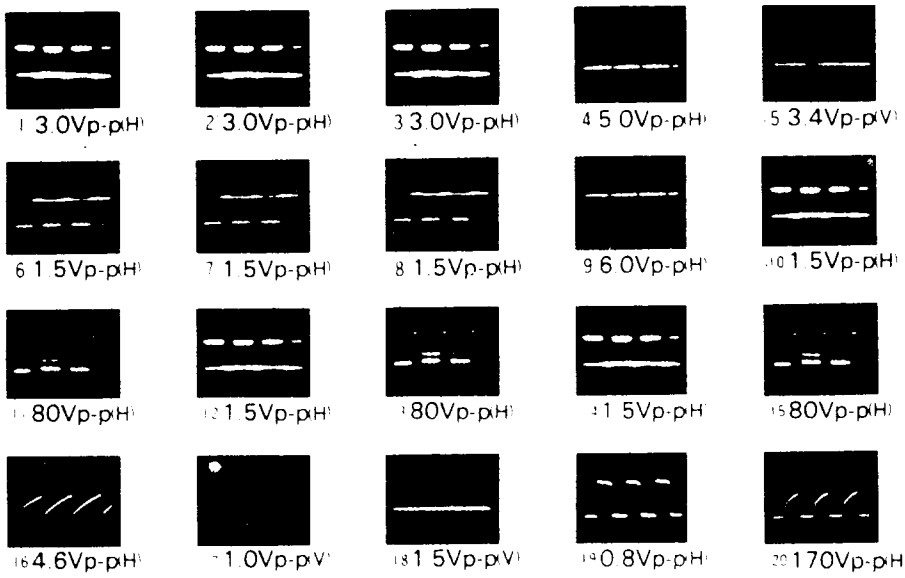

For Service Manuals
contact
MAURITRON SERVICES
8 Cherry Tree Road, Chinnor
Oxfordshire, OX9 4QY.
Tel (01844) 351694
Fax (01844) 352554

Note:
Waveforms were taken with character signal

SEMICONDUCTOR LEAD IDENTIFICATION

Shape of Transistors

Q502		2SD1426
Q401 Q402		2SC2073 2SD1459 2SD401
Q201 Q202 Q203 Q204 Q501 Q601 Q602 Q6B1 Q6G1 Q6R1 Q901		2SC2230 2SC2274 2SC2482 2SA564 2SA673 2SC2236 2SC1213
Q204 Q403 Q601		2SC2603 2SC1685 2SA1115
Q401 Q403		2SC2168 2SD386

Q204 Q403 Q601		2SC2021 2SA937
Q6R2 Q6G2 Q6B2		2SC1507
IC201 IC202 IC203		M74LS05P M74LS38P
IC401		LA7823
IC991		STK7308 STK7309

IN order to expedite delivery of replacement part orders.

Specify 1. Model number
2. Part number and Description
3. Quantity

Unless full information is supplied, delay in execution of orders will result.

RESISTOR

MARK	TOLERACE
J	± 5%
K	± 10%
M	± 20%

CAPACITOR

MARK	TOLERANCE	MARK	TOLERA
J	± 5%	Z	+80% −20%
K	± 10%	C	±0.25
M	± 20%	D	±0.5p
P	+100% − 0%	F	±1pF

SYMBOL NO	PARTS NO.	DESCRIPTION
PICTURE TUBE		
	QX251P20701	Picture tube 370MLB22E (AT-1332A)
	"	" (XC-1404C)
	"	" (XC-1404CA)
	QX251P20704	" 370MLB22-DE (XC-1404CB)
	"	" (XC-1404CC)
	"	" (XC-1404CD)
TRANSISTORS		
Q201	QX260P41603	2SC2274-F
Q202	"	"
Q203	QX260P38701	2SC2236-O.Y
Q204	QX260P25601	2SA1115-E.F
Q401	QX260P42002	2SC2073-B.C
Q402	"	"
Q403	QX260P33804	2SC2603-E.F
Q501	QX260P42201	2SC2482
Q502	QX260P44701	2SD1426
Q6B1	QX260P16607	2SA673-C/D
Q6B2	QX260P35401	2SC1507-(1)
Q6G1	QX260P16607	2SA673-C/D
Q6G2	QX260P35401	2SC1507-(1)
Q6R1	QX260P16607	2SA673-C/D
Q6R2	QX260P35401	2SC1507-(1)
Q601	QX260P25601	2SA1115-E.F
Q602	QX260P41603	2SC2274-F
Q901	QX260P38603	2SC2230-Y.GR
INTEGRATED CIRCUITS		
IC201	QX266P45208	M74LS05P/SN74LS05N/HD74LS05P /MB74LS05M/DN74LS05
IC202	"	"
IC203	QX266P45708	M74LS38P/SN74LS38N/HD74LS38P /MB74LS38M/DN74LS38
IC401	QX266P50701	LA7823
IC991	QX267P90701	STK7308 (AT-1332A)
	QX267P90702	STK7309 (XC-1404C)
	"	" (XC-1404CA)
	"	" (XC-1404CB)
	"	" (XC-1404CC)
	"	" (XC-1404CD)
DIODES AND OTHERS		
D2B1	QX264P22001	MZ307B or EQA02-07CDA
D2G1	"	"
D2H I	"	"
D2R1	"	"

SYMBOL NO	PARTS NO.	DESCRIPTION
D201	QX264P19303	MZ305B or EQA02-05CDB
D202	QX264P22001	MZ307B or EQA02-07CDA
D401	QX264P04508	1S2076A
D402	"	"
D403	"	"
D404	QX264P28501	S5500-D
D501	QX264P04508	1S2471
D502	QX264P23101	TVRIG
D503	"	"
D504	QX264P04504	1S2471
D505	QX264P28501	S5500-D
D506	QX264P23101	TVRIG
D507	QX264P28501	S5500-D
D508	QX264P23101	TVRIG
D510	QX264P04508	1S2076A/1S2471
D511	QX264P24401	HZT33-01
D6B1	QX264P22203	MZ306-B2/HZ6C21
D6G1	"	"
D6R1	"	"
D601	QX264P04508	1S2471
D602	"	"
D901	QX264P10106	RM-1C
D902	"	"
D903	"	"
D904	"	"
D905	QX264P35101	HZ3.6BP
D906	QX264P23101	TVRIG
D907	QX264P35101	HZ3.6BP
D912	QX264P23101	TVRIG
D951	QX264P10202	RU-3B
D952	QX264P30601	R2KY
D953	QX264P23101	TVRIG
D991	QX264P20101	GL-9PR2
TRANSFORMERS		
T501	QX336D00301	Horizontal drive
T502	QX349P14201	Side-PCC
T503	QX334P12101	Flyback (AT-1332A)
"	QX334P12102	" (XC-1404C)
"	"	" (XC-1404CA)
"	"	" (XC-1404CB)
"	"	" (XC-1404CC)
"	"	" (XC-1404CD)
T931	QX350P24702	Power

SYMBOL NO.	PARTS NO.	DESCRIPTION
		COILS
L201	QX411D00901	Core-ferrite
L204	〃	〃
L205	〃	〃
L208	QX351P02201	Line-filter
L209	〃	〃
L210	QX411D00901	Core-ferrite
L401	QX321C03109	RF 33μH-K
L491	QX330P08506	Deflection Yoke
L501	QX321C01105	RF 8200μH-J
L502	QX321C03109	〃 33μH-K
L551	QX333D00801	Horizontal linearity
L552	QX335P00401	Horizontal width (AT-1332A)
	QX335P00601	〃 (XC-1404C)
	〃	〃 (XC-1404CA)
	〃	〃 (XC-1404CB)
	〃	〃 (XC-1404CC)
	〃	〃 (XC-1404CD)
L601	QX411P00104	Lead-ferrite
L603	QX321C03009	RF 4.7μH-K
L901	QX351P01701	Line-filter
L902	QX351D02501	〃
L904	QX411P00101	Lead-ferrite
L905	QX409P23201	COil 6μH
L951	QX409P06501	Filter
	QX409B02007	Degaussing (AT-1332A)
	QX409B04301	〃 (XC-1404C)
	〃	〃 (XC-1404CA)
	〃	〃 (XC-1404CB)
	〃	〃 (XC-1404CC)
	〃	〃 (XC-1404CD)
		CAPACITORS AND RESISTORS
C906	QX185D05409	H250V 150M-M (AT-1332A)
	QX185D05408	H450V 150M-M (XC-1404C～XC-1404CD)
C953	QX185D05404	H180V 330M-M
R413	QX109D05105	R-Cement wire 10W 390Ω-K
R520	QX103P37804	R-Fuse 1/4W 2.2Ω-J
R521	QX109P05204	〃 1/4W 1.2Ω-J
R524	QX109D06701	R-Cement wire 10W 10Ω-K
R901	QX102P08704	〃 10W 4.7Ω-K
R952	QX103P37707	R-Fuse 1/4W 0.56Ω-K
		VARIABLE RESISTORS
VR201	QX127C03100	Semifixed 1/5W B30KΩ±25%
VR291	QX129D09801	PCB 0.15W B5KΩ-25S
VR292	QX129D10503	PCB 0.15W B200Ω-25S
VR402	QX127C02008	Semifixed 1/5W B10KΩ±25%
VR403	QX129D09209	PCB 0.15W B500Ω-15S
VR404	QX129D09205	〃 0.15W B200KΩ-15S
VR502	QX127C02007	Semifixed 1/5W B5KΩ±25%
VR591	QX129D09801	PCB 0.15W B5KΩ-25S
VR6B1	QX127C03002	Semifixed 1/5W B300Ω±25%
VR6B2	QX127C03006	〃 1/5W B3KΩ±25%
VR6G2	〃	〃 〃
VR6R1	QX127C03002	〃 1/5W B300Ω±25%
VR6R2	QX127C03006	〃 1/5W B3KΩ±25%

SYMBOL NO.	PARTS NO.	DESCRIPTION
VR901	QX127C02101	〃 1/5W B50KΩ±25%
		PRINTED CIRCUITS BOARD
	QT920A20701	PCB-DISPLAY (AT-1332A)
	QT920A20704	PCB-DISPLAY (XC-1404C～CD)
	QT920C89901	PCB-CONTROL-2
	QT920C90001	PCB-CONTROL
	QT920D06605	PCB-CRT (AT-1332A)
	CT920D90101	〃 (XC-1404C)
	〃	〃 (XC-1404CA)
	〃	〃 (XC-1404CD)
	〃	〃 (XC-1404CC)
		(XC-1404CD)
		MISCELLANEOUS
F901	QX283D03805	Fuse 3.15A (AT-1332A)
	QX283D02406	Fuse 3.15A (XC-1404～XC-1404CD)
S491	QX129P00709	Band SW (V-CENT)
S591	〃	〃 (H-CENT)
S691	〃	〃 (SERVICE)
S991	QX432P05301	SW-Push (Power on/Off)
	QX242C79304	AC-Power cond (AT-1332A) (XC-1404CD)
	QX242C84902	Cable
	QX338P01701	Convergence purity ring assembly
	QX449C03102	Socket-CRT
	QX641D36501	Wedge (AT-1332A)
	QX641D75801	Wedge (XC-1404C～XC-1404CD)
	QX669D22106	Screw-TB
	QX871C18101	IB-Display (AT-1332A)
	QX871C18201	IB-Display (XC-1404C～XC-1404CD)
RP901	QX260P07101	Posistor (AT-1332A)
	QX265P04703	Posistor (XC-1404C～XC-1404CD)
RT201	QX265P07201	Thermistor
		CABINET PARTS
	QX700A14107	Back cover (AT-1332A)
	QX700B09603	〃 (XC-1404C)
	〃	〃 (XC-1404CA)
	〃	〃 (XC-1404CB)
	〃	〃 (XC-1404CC)
	〃	〃 (XC-1404CD)
	QX700B08805	Front cabinet
	QX702C47100	Door
	QX734D01001	Knob-VR
	QX802C53501	Packing case (AT-1332A)
	QX802C61101	〃 (XC-1404C)
	QX802C61102	〃 (XC-1404CA)
	QX802C61103	〃 (XC-1404CB)
	QX802C61104	〃 (XC-1404CC)
	QX802C61105	〃 (XC-1404CD)
	QX803B35502	Cushion
	QX803D14503	〃
	QX829C04401	Packing sheet
	QX829D11501	〃
	QX831B02103	Packing bag

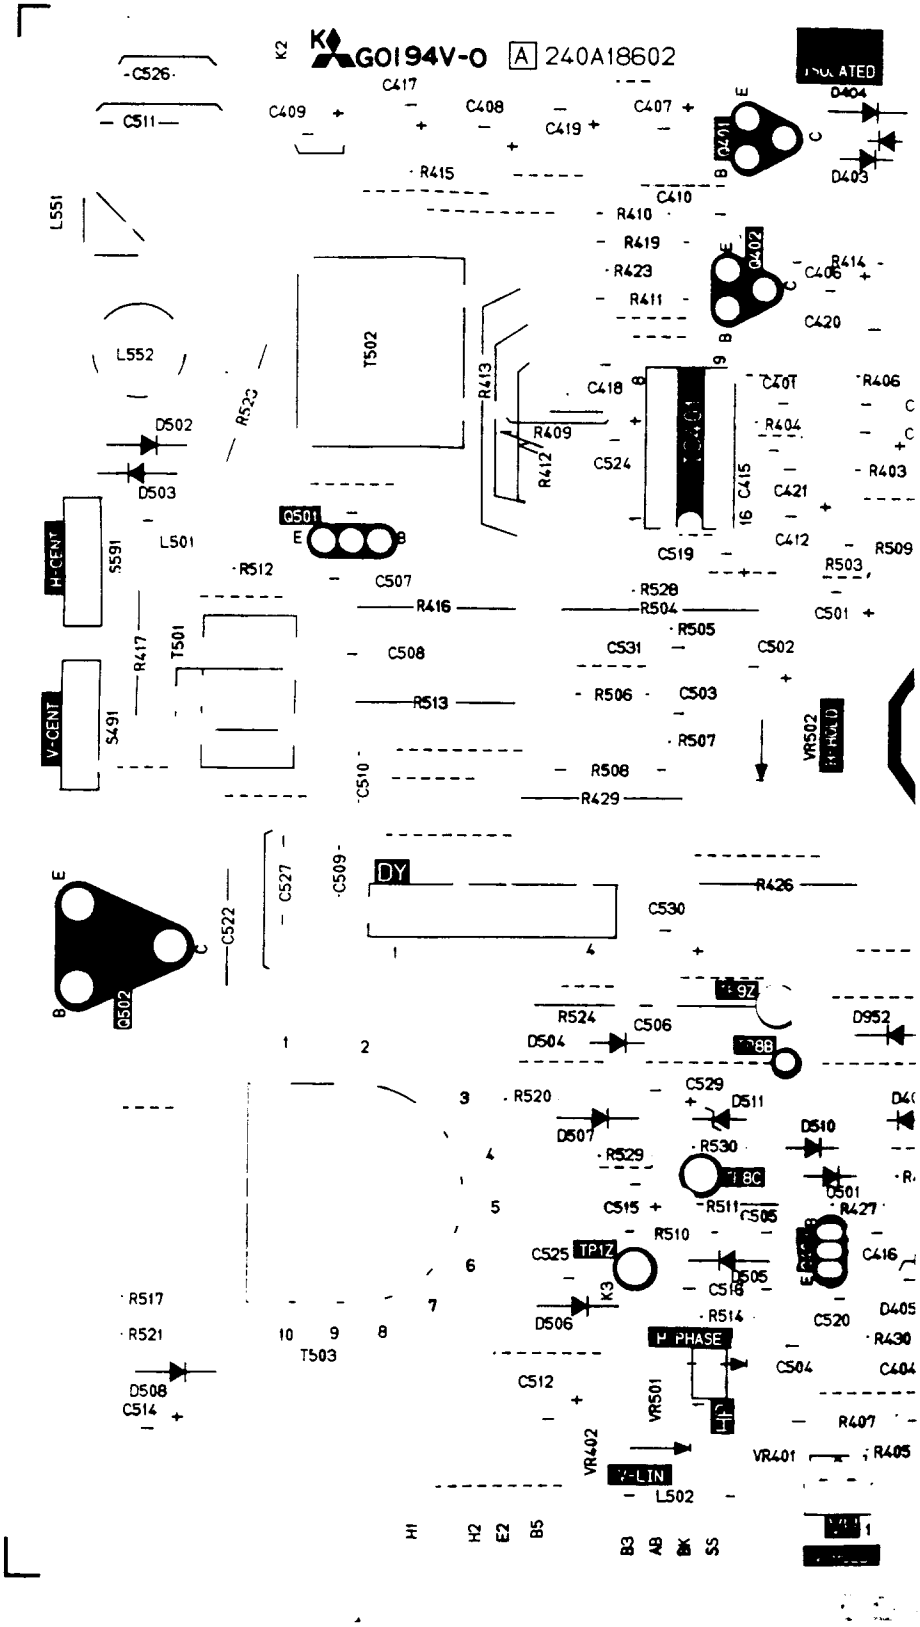
K2
G0194V-0
A
240A18602
C526
C511
C417
C409
C408
C419
C407
D404
D403
Q401
Q402
R415
C410
R410
R419
R423
R411
C406
R414
C420
L551
L552
T502
R413
R409
R412
C418
C524
C401
C415
C421
C412
C519
R406
R404
R403
R509
R503
C501
D502
D503
L501
Q501
C507
R512
R528
R504
R505
R416
C508
C531
C502
R513
R506
C503
R507
R508
R429
C510
C509
C527
C522
Q502
DY
R426
C530
R524
C506
D504
D952
R520
C529
D511
D507
R530
R529
D510
R511
C505
R427
C515
R510
C525
C516
D505
R517
R521
D506
R514
C520
D405
R430
C504
C404
T503
D508
C514
C512
VR501
R407
VR402
VR401
R405
L502
H-CENT
S591
V-CENT
S491
T501
R417
VR502
H-HOLD
TP9Z
TP8B
TP8C
TP1Z
K3
H PHASE
V-LIN
H1
H2
E2
B5
B3
AB
BK
S5

PCB-DISPLAY

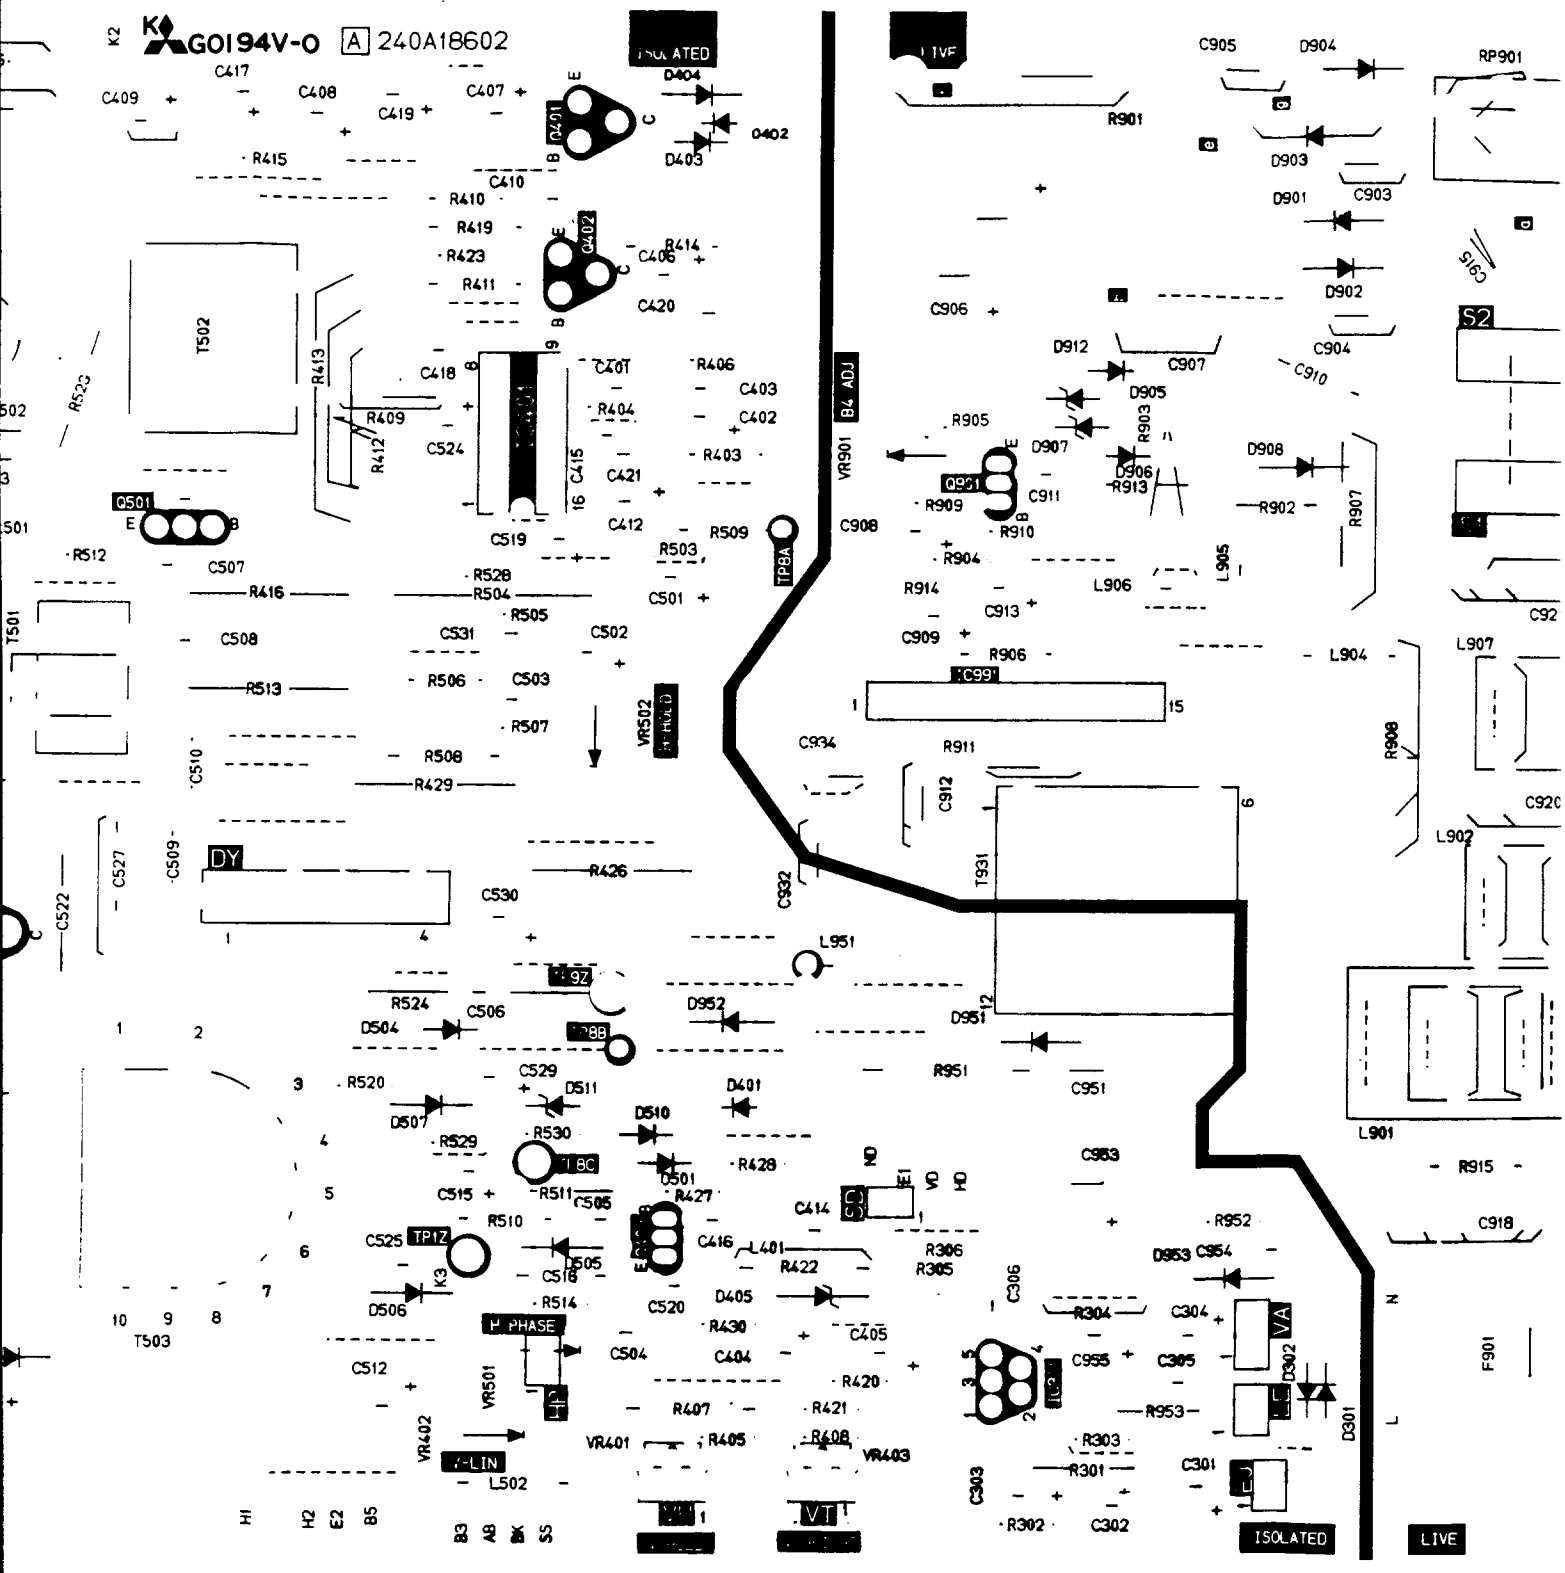
K2
G0194V-0
A 240A18602
ISOLATED
LIVE
DY
H PHASE
V-LIN
B4 ADJ
VR901
VR502
VR501
VR402
VR401
VR403
T502
T503
T501
T931
Q501
Q401
Q402
Q961
K999
TP8A
TP8B
TP8C
TP7Z
TP9Z
S2
L901
L902
L904
L905
L906
L907
L951
L502
F901
RP901
D302
D301
C303
C306
C401
C415
C416
C421
C524
C525
C527
C530
C531
C932
C934
C951
C953
C954
C955
C963
C915
C918
R901
R902
R903
R904
R905
R906
R907
R908
R909
R910
R911
R912
R913
R914
R915
R951
R952
R953
R301
R303
R304
R305
R306
R401
R402
R403
R404
R405
R406
R407
R408
R409
R410
R411
R412
R413
R414
R415
R419
R420
R421
R422
R423
R427
R428
R429
R430
R501
R502
R503
R504
R505
R506
R507
R508
R509
R510
R511
R512
R513
R514
R520
R523
R524
R526
R528
R529
R530
D401
D402
D403
D404
D501
D502
D503
D504
D505
D506
D507
D510
D511
D901
D902
D903
D904
D905
D906
D907
D908
D912
D951
D952
C401
C402
C403
C404
C405
C406
C407
C408
C409
C410
C417
C418
C419
C420
C501
C502
C503
C504
C505
C506
C507
C508
C509
C510
C512
C514
C515
C516
C520
C522
C529
C901
C902
C903
C904
C905
C906
C907
C908
C909
C910
C911
C912
C913
C914
C920
C922
K3
T1
T2
T3
T4
T5
T6
T7
T8
T9
B1
B2
B3
B4
B5
B6
B7
B8
B9
B10
H1
H2
E2
S5
VA
VT
HD
VD
SC
E1
E2
E3
E4
E5
E6
E7
E8
E9
E10
E11
E12
E13
E14
E15
E16
E17
E18
E19
E20
E21
E22
E23
E24
E25
E26
E27
E28
E29
E30
E31
E32
E33
E34
E35
E36
E37
E38
E39
E40
E41
E42
E43
E44
E45
E46
E47
E48
E49
E50
E51
E52
E53
E54
E55
E56
E57
E58
E59
E60
E61
E62
E63
E64
E65
E66
E67
E68
E69
E70
E71
E72
E73
E74
E75
E76
E77
E78
E79
E80
E81
E82
E83
E84
E85
E86
E87
E88
E89
E90
E91
E92
E93
E94
E95
E96
E97
E98
E99
E100
E101
E102
E103
E104
E105
E106
E107
E108
E109
E110
E111
E112
E113
E114
E115
E116
E117
E118
E119
E120
E121
E122
E123
E124
E125
E126
E127
E128
E129
E130
E131
E132
E133
E134
E135
E136
E137
E138
E139
E140
E141
E142
E143
E144
E145
E146
E147
E148
E149
E150
E151
E152
E153
E154
E155
E156
E157
E158
E159
E160
E161
E162
E163
E164
E165
E166
E167
E168
E169
E170
E171
E172
E173
E174
E175
E176
E177
E178
E179
E180
E181
E182
E183
E184
E185
E186
E187
E188
E189
E190
E191
E192
E193
E194
E195
E196
E197
E198
E199
E200
E201
E202
E203
E204
E205
E206
E207
E208
E209
E210
E211
E212
E213
E214
E215
E216
E217
E218
E219
E220
E221
E222
E223
E224
E225
E226
E227
E228
E229
E230
E231
E232
E233
E234
E235
E236
E237
E238
E239
E240
E241
E242
E243
E244
E245
E246
E247
E248
E249
E250
E251
E252
E253
E254
E255
E256
E257
E258
E259
E260
E261
E262
E263
E264
E265
E266
E267
E268
E269
E270
E271
E272
E273
E274
E275
E276
E277
E278
E279
E280
E281
E282
E283
E284
E285
E286
E287
E288
E289
E290
E291
E292
E293
E294
E295
E296
E297
E298
E299
E300
E301
E302
E303
E304
E305
E306
E307
E308
E309
E310
E311
E312
E313
E314
E315
E316
E317
E318
E319
E320
E321
E322
E323
E324
E325
E326
E327
E328
E329
E330
E331
E332
E333
E334
E335
E336
E337
E338
E339
E340
E341
E342
E343
E344
E345
E346
E347
E348
E349
E350
E351
E352
E353
E354
E355
E356
E357
E358
E359
E360
E361
E362
E363
E364
E365
E366
E367
E368
E369
E370
E371
E372
E373
E374
E375
E376
E377
E378
E379
E380
E381
E382
E383
E384
E385
E386
E387
E388
E389
E390
E391
E392
E393
E394
E395
E396
E397
E398
E399
E400
E401
E402
E403
E404
E405
E406
E407
E408
E409
E410
E411
E412
E413
E414
E415
E416
E417
E418
E419
E420
E421
E422
E423
E424
E425
E426
E427
E428
E429
E430
E431
E432
E433
E434
E435
E436
E437
E438
E439
E440
E441
E442
E443
E444
E445
E446
E447
E448
E449
E450
E451
E452
E453
E454
E455
E456
E457
E458
E459
E460
E461
E462
E463
E464
E465
E466
E467
E468
E469
E470
E471
E472
E473
E474
E475
E476
E477
E478
E479
E480
E481
E482
E483
E484
E485
E486
E487
E488
E489
E490
E491
E492
E493
E494
E495
E496
E497
E498
E499
E500
E501
E502
E503
E504
E505
E506
E507
E508
E509
E510
E511
E512
E513
E514
E515
E516
E517
E518
E519
E520
E521
E522
E523
E524
E525
E526
E527
E528
E529
E530
E531
E532
E533
E534
E535
E536
E537
E538
E539
E540
E541
E542
E543
E544
E545
E546
E547
E548
E549
E550
E551
E552
E553
E554
E555
E556
E557
E558
E559
E560
E561
E562
E563
E564
E565
E566
E567
E568
E569
E570
E571
E572
E573
E574
E575
E576
E577
E578
E579
E580
E581
E582
E583
E584
E585
E586
E587
E588
E589
E590
E591
E592
E593
E594
E595
E596
E597
E598
E599
E600
E601
E602
E603
E604
E605
E606
E607
E608
E609
E610
E611
E612
E613
E614
E615
E616
E617
E618
E619
E620
E621
E622
E623
E624
E625
E626
E627
E628
E629
E630
E631
E632
E633
E634
E635
E636
E637
E638
E639
E640
E641
E642
E643
E644
E645
E646
E647
E648
E649
E650
E651
E652
E653
E654
E655
E656
E657
E658
E659
E660
E661
E662
E663
E664
E665
E666
E667
E668
E669
E670
E671
E672
E673
E674
E675
E676
E677
E678
E679
E680
E681
E682
E683
E684
E685
E686
E687
E688
E689
E690
E691
E692
E693
E694
E695
E696
E697
E698
E699
E700
E701
E702
E703
E704
E705
E706
E707
E708
E709
E710
E711
E712
E713
E714
E715
E716
E717
E718
E719
E720
E721
E722
E723
E724
E725
E726
E727
E728
E729
E730
E731
E732
E733
E734
E735
E736
E737
E738
E739
E740
E741
E742
E743
E744
E745
E746
E747
E748
E749
E750
E751
E752
E753
E754
E755
E756
E757
E758
E759
E760
E761
E762
E763
E764
E765
E766
E767
E768
E769
E770
E771
E772
E773
E774
E775
E776
E777
E778
E779
E780
E781
E782
E783
E784
E785
E786
E787
E788
E789
E790
E791
E792
E793
E794
E795
E796
E797
E798
E799
E800
E801
E802
E803
E804
E805
E806
E807
E808
E809
E810
E811
E812
E813
E814
E815
E816
E817
E818
E819
E820
E821
E822
E823
E824
E825
E826
E827
E828
E829
E830
E831
E832
E833
E834
E835
E836
E837
E838
E839
E840
E841
E842
E843
E844
E845
E846
E847
E848
E849
E850
E851
E852
E853
E854
E855
E856
E857
E858
E859
E860
E861
E862
E863
E864
E865
E866
E867
E868
E869
E870
E871
E872
E873
E874
E875
E876
E877
E878
E879
E880
E881
E882
E883
E884
E885
E886
E887
E888
E889
E890
E891
E892
E893
E894
E895
E896
E897
E898
E899
E900
E901
E902
E903
E904
E905
E906
E907
E908
E909
E910
E911
E912
E913
E914
E915
E916
E917
E918
E919
E920
E921
E922
E923
E924
E925
E926
E927
E928
E929
E930
E931
E932
E933
E934
E935
E936
E937
E938
E939
E940
E941
E942
E943
E944
E945
E946
E947
E948
E949
E950
E951
E952
E953
E954
E955
E956
E957
E958
E959
E960
E961
E962
E963
E964
E965
E966
E967
E968
E969
E970
E971
E972
E973
E974
E975
E976
E977
E978
E979
E980
E981
E982
E983
E984
E985
E986
E987
E988
E989
E990
E991
E992
E993
E994
E995
E996
E997
E998
E999
E1000

P.C. BOARD (BOTTOM VIEWS)

PCB-C

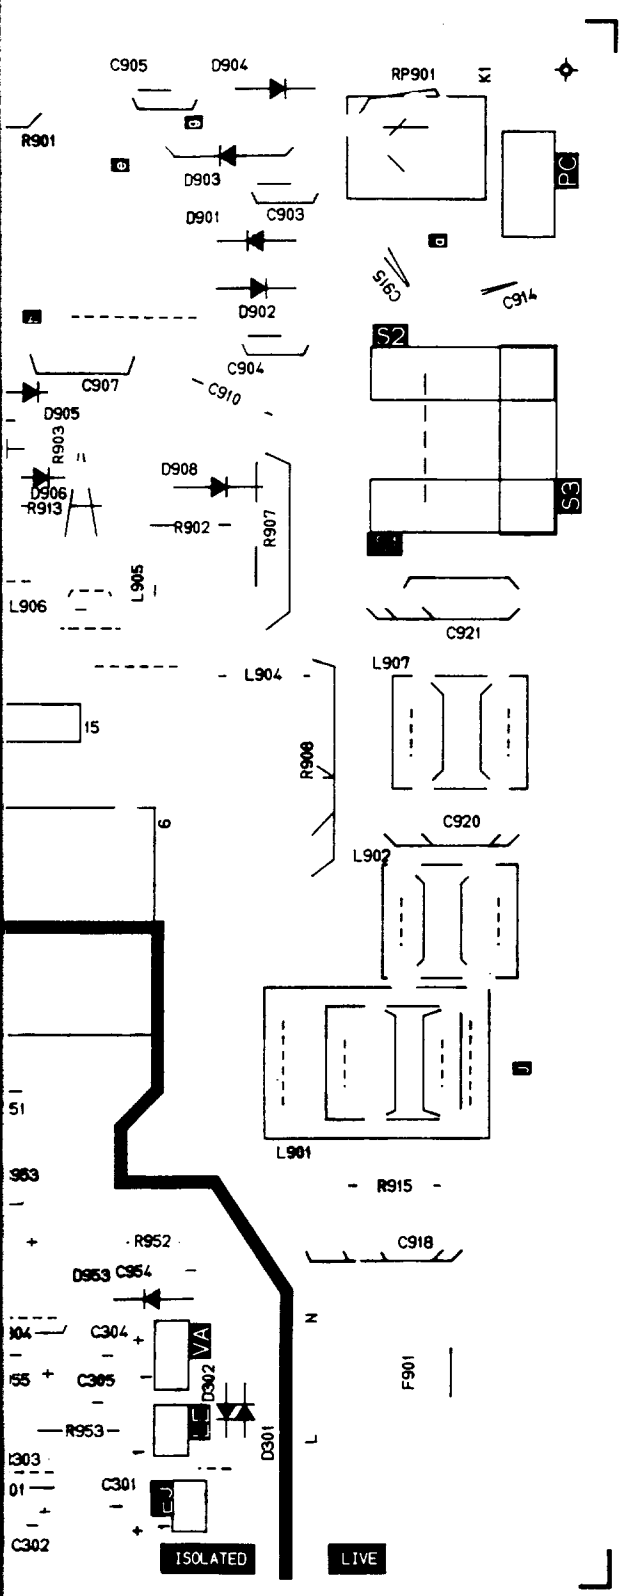

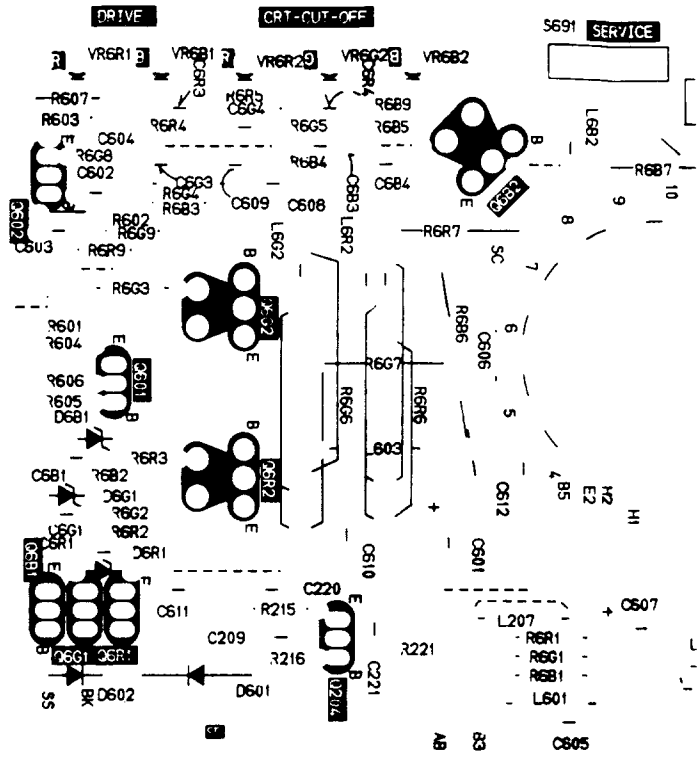

PCB-CONTROL

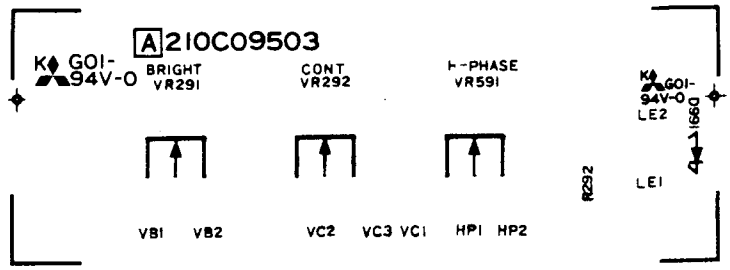

PCB-CONTROL-2

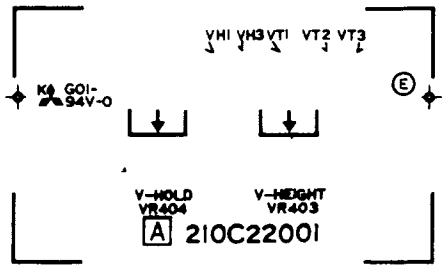

PCB-CRT

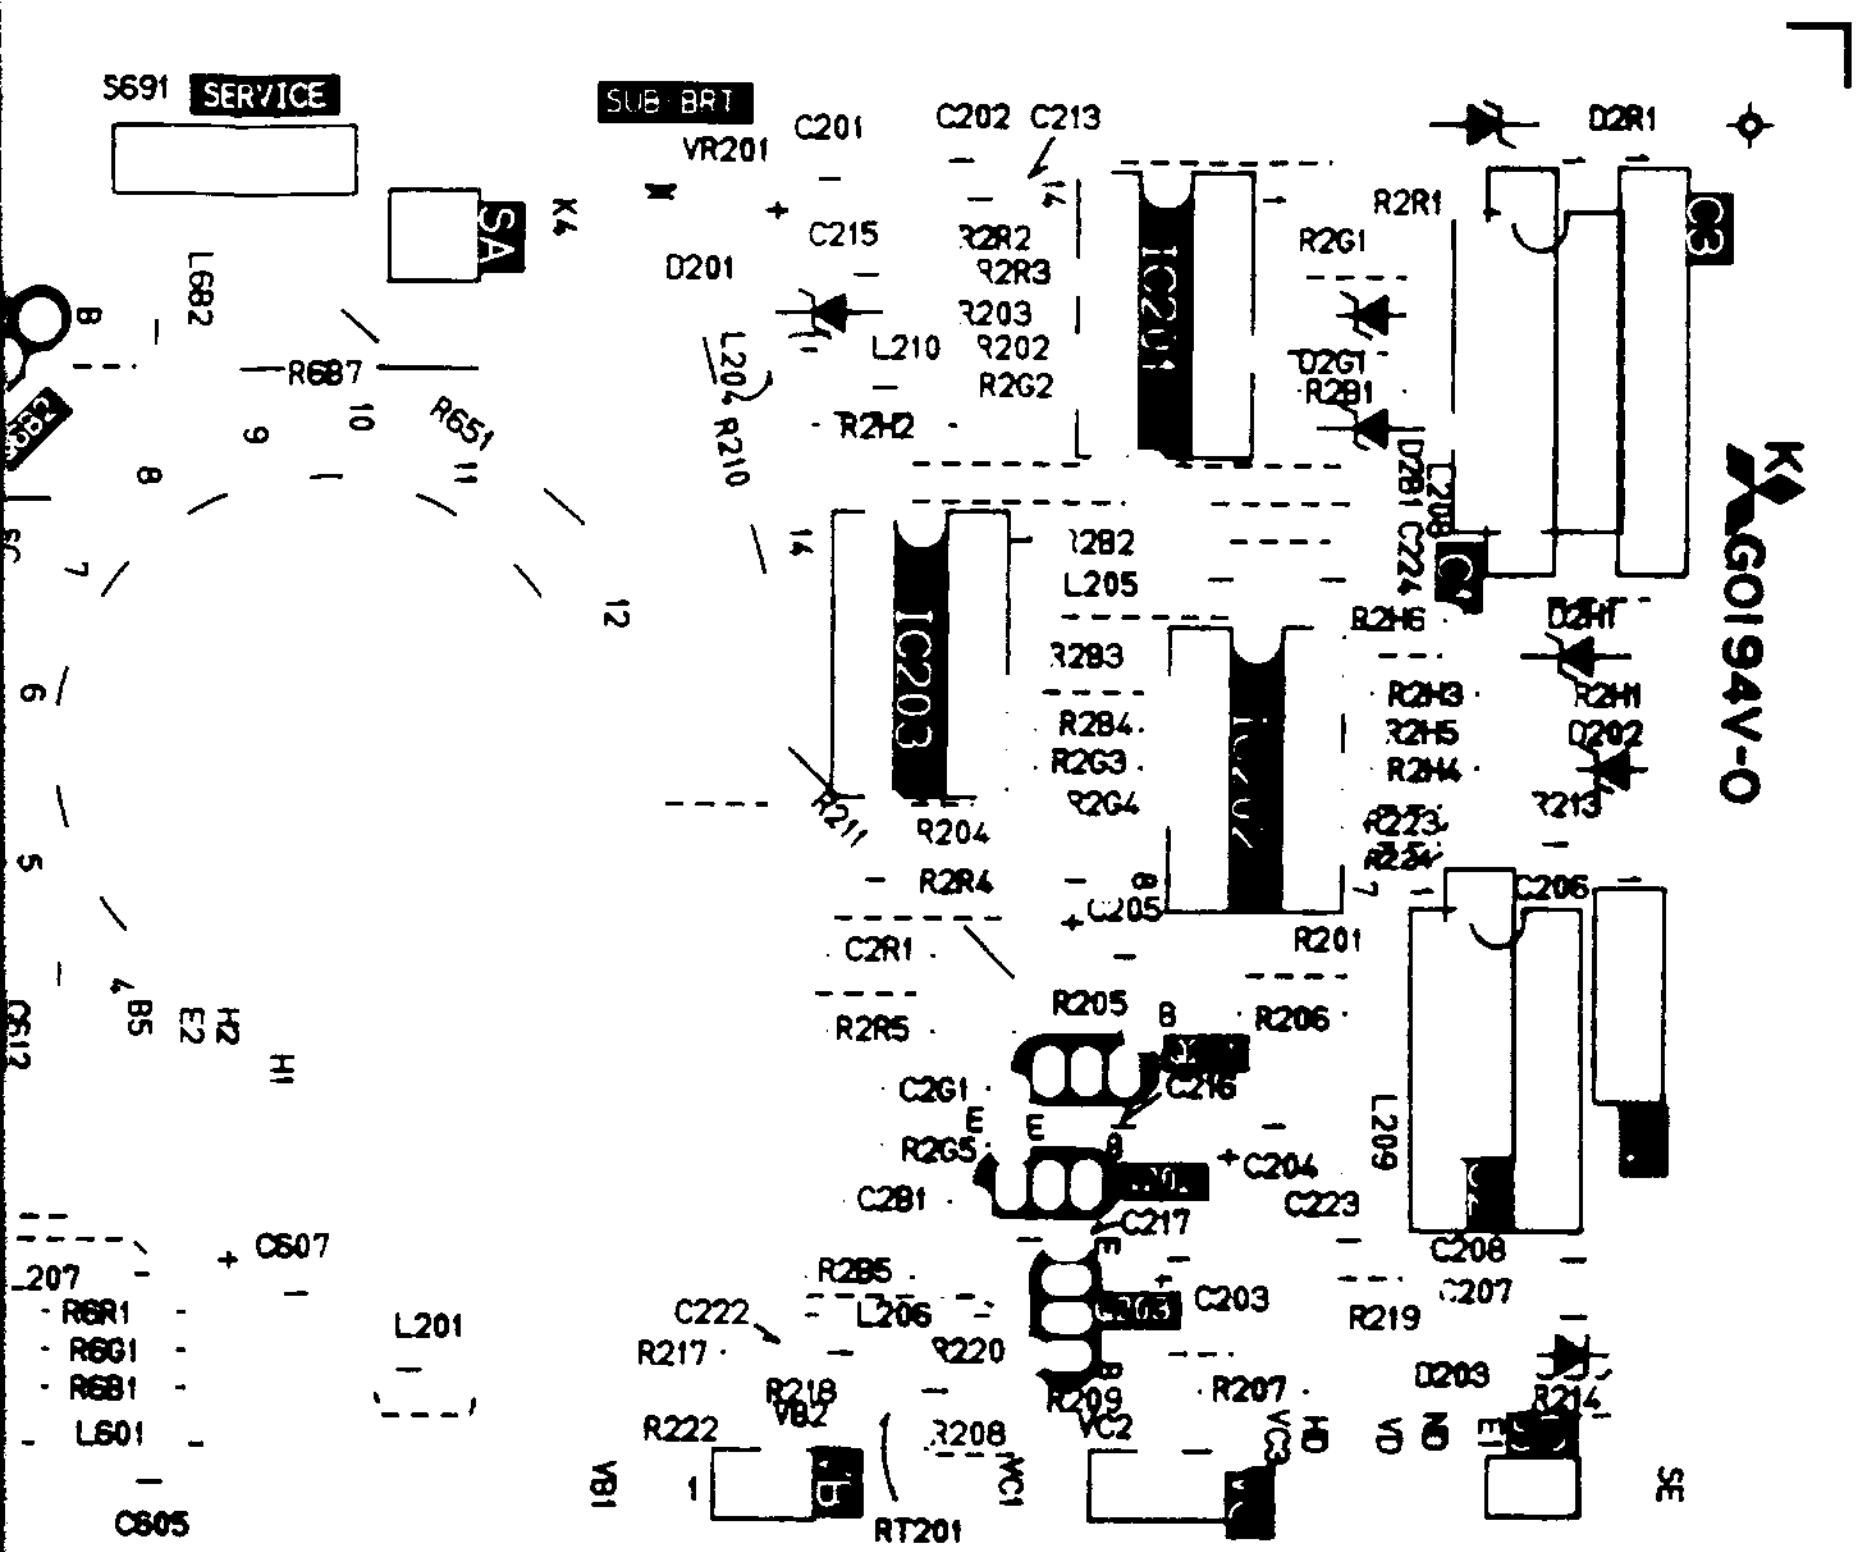
S691
SERVICE
SUB BRT
C201
C202 C213
D2R1
VR201
SA
K4
C215
R2R2
R2R3
R2R1
R2G1
C3
D201
L682
R203
L210
R202
R2G2
D2G1
R2B1
R687
R651
L204
R210
R2H2
IC201
D2B1
C208
C224
R2B2
L205
IC203
R2H6
D2H1
R2B3
R2H3
R2H1
R2B4
R2H5
D202
R2G3
R2H4
R2G4
R211
R204
R223
R213
R2R4
C206
C205
R201
C2R1
R205
R206
R2R5
C2G1
C216
L209
R2G5
C204
C2B1
C223
C217
C607
C208
R2B5
C207
L201
C222
L206
C203
R219
R217
R220
R218
VB2
R209
R207
D203
R222
R208
VC2
R214
VB1
VC1
VC3
RT201
SE
C605
L601
R6R1
R6G1
R6B1
GO194V-O


GO1-
94V-O
LE2
D991
R292
LE1

TIMING CHART

1) HORIZONTAL

f_H = 15.70 KHz

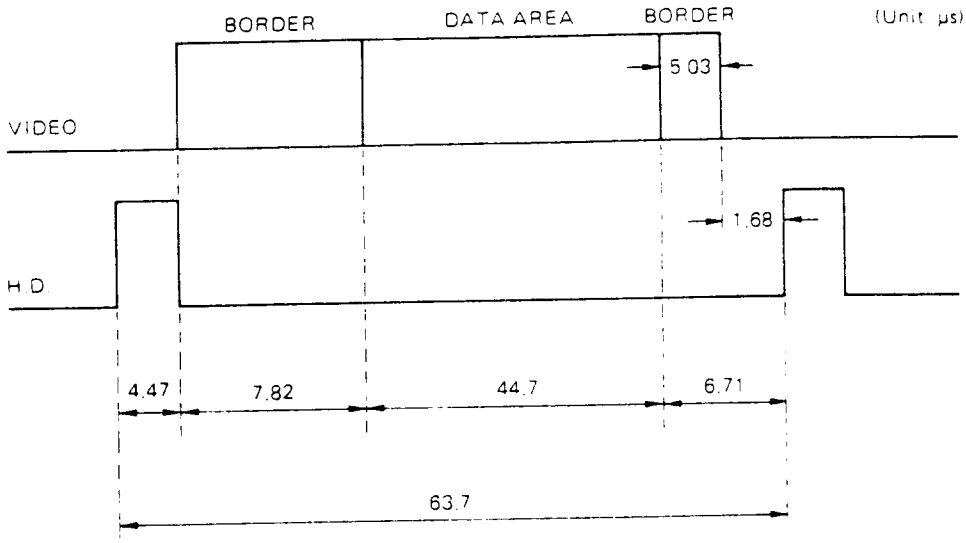

2) VERTICAL

f_V = 59.81 Hz

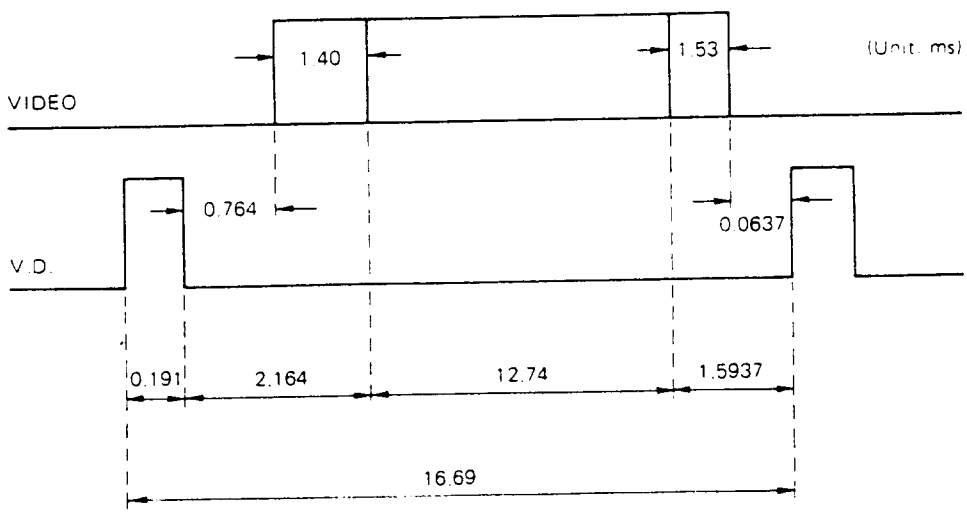

SHADED COMPONENTS HAVE SPECIAL CHARACTERISTICS IMPORTANT TO SAFETY. BEFORE REPLACING ANY OF THESE COMPONENTS READ CAREFULLY THE PRODUCT SAFETY NOTICE IN THE SERVICE MANUAL. DON'T DEGRADE THE SAFETY OF THE RECEIVERS THROUGH IMPROPER SERVICING.

SERVICE MAN WARNING

X-RADIATION PRECAUTION

THIS PRODUCT INCLUDES CRITICAL ELECTRICAL AND MECHANICAL PARTS ESSENTIAL FOR X-RADIATION PROTECTION

TO AVOID POSSIBLE EXPOSURE TO X-RADIATION TAKE X-RADIATION PROTECTIVE MEASURES FOR PERSONNEL DURING SERVICING.

SEE SERVICE INSTRUCTIONS FOR SPECIFIED REPLACEMENT PARTS AND SERVICE ADJUSTMENTS.

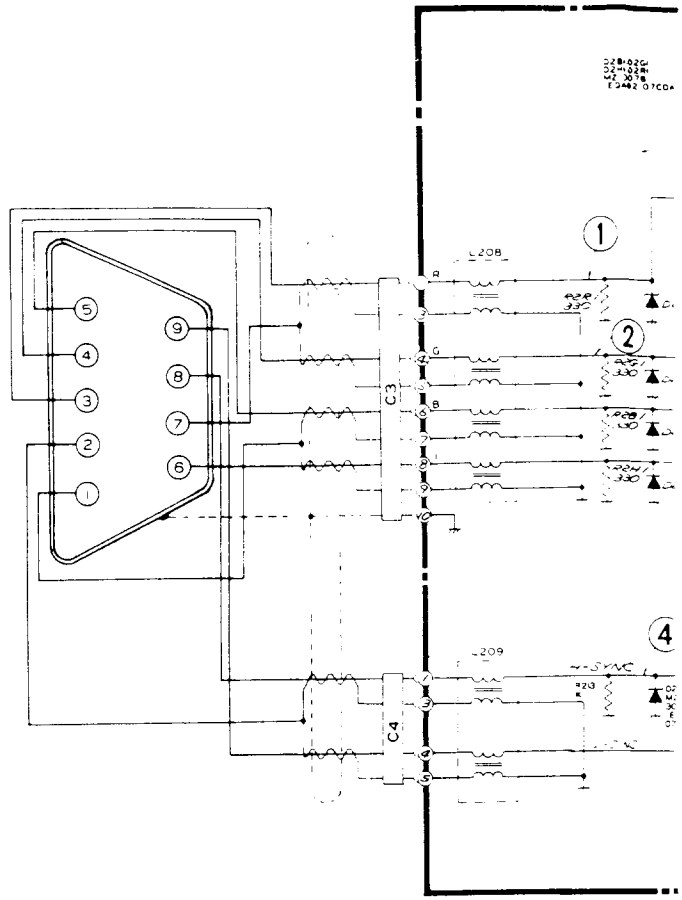

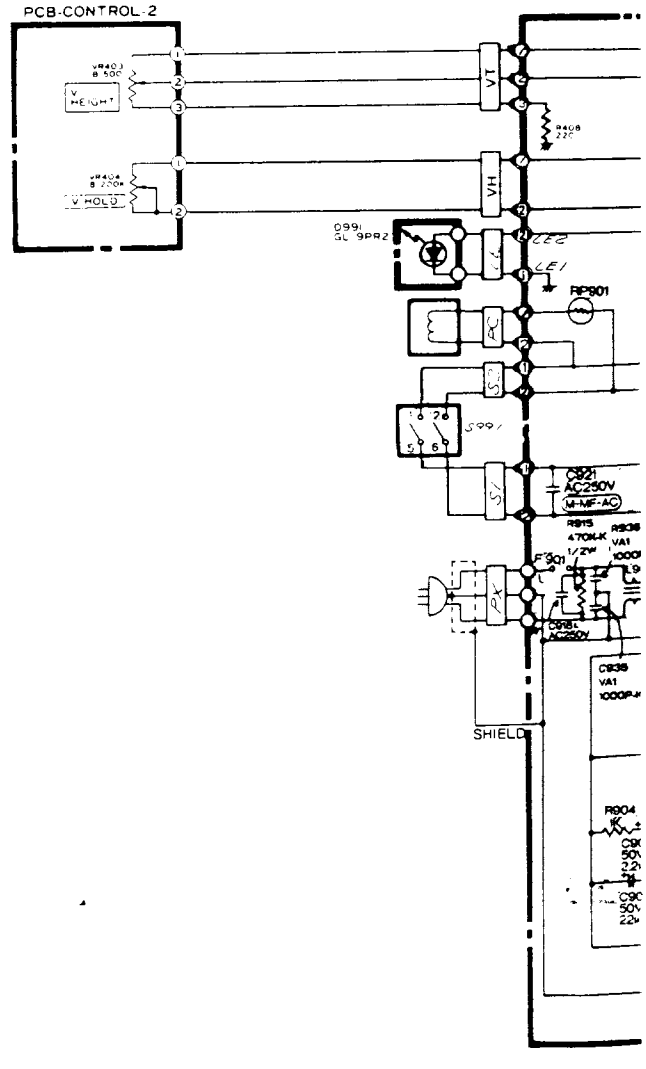

THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

VE SPECIAL CHARACTER-
ETY. BEFORE REPLACING
'S READ CAREFULLY THE
IN THE SERVICE MANUAL.
ETY OF THE RECEIVERS
NG.

CRITICAL ELECTRICAL AND
NTIAL FOR X-RADIATION

URE TO X-RADIATION TAKE
EASURES FOR PERSONNEL

NS FOR SPECIFIED RE-
SERVICE ADJUSTMENTS

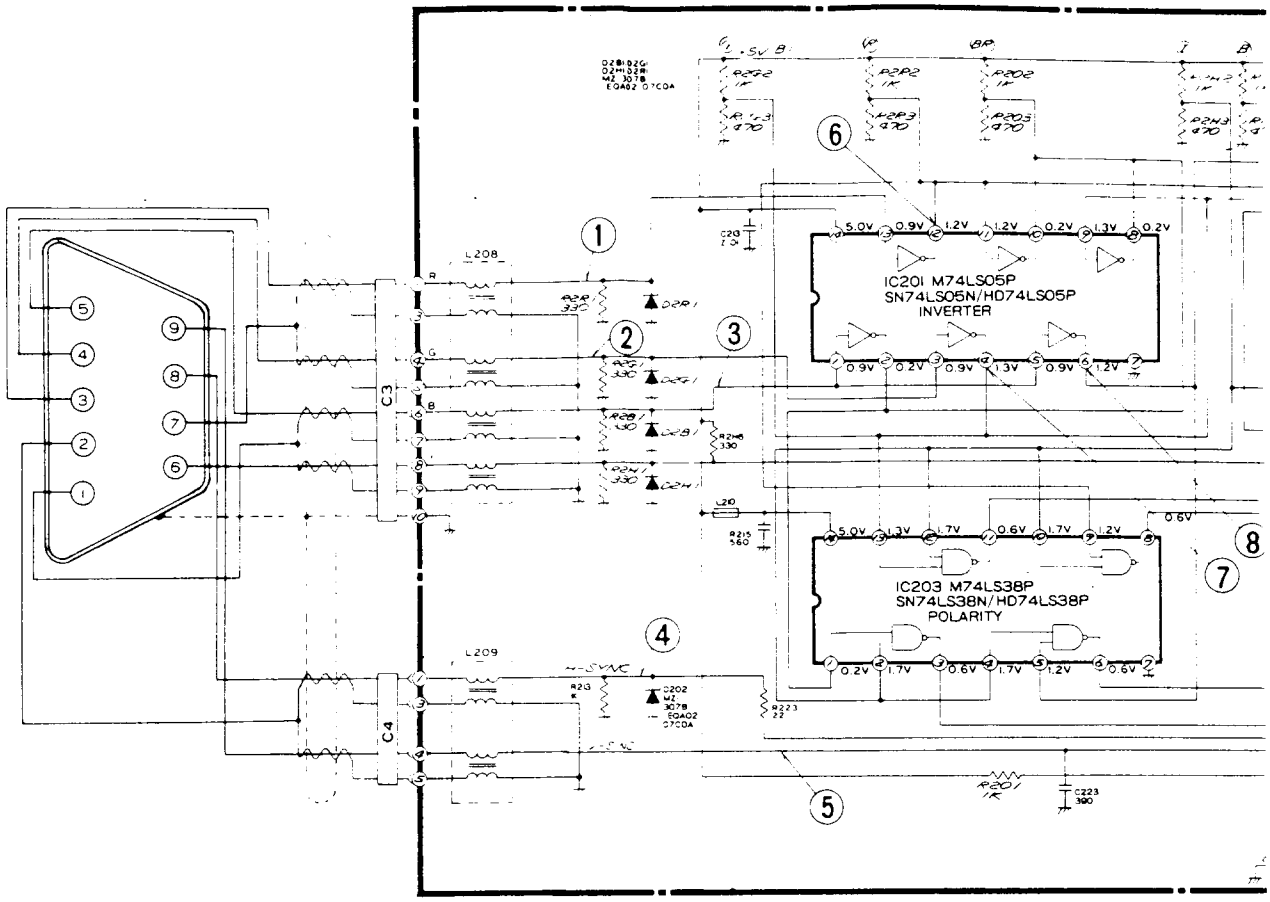

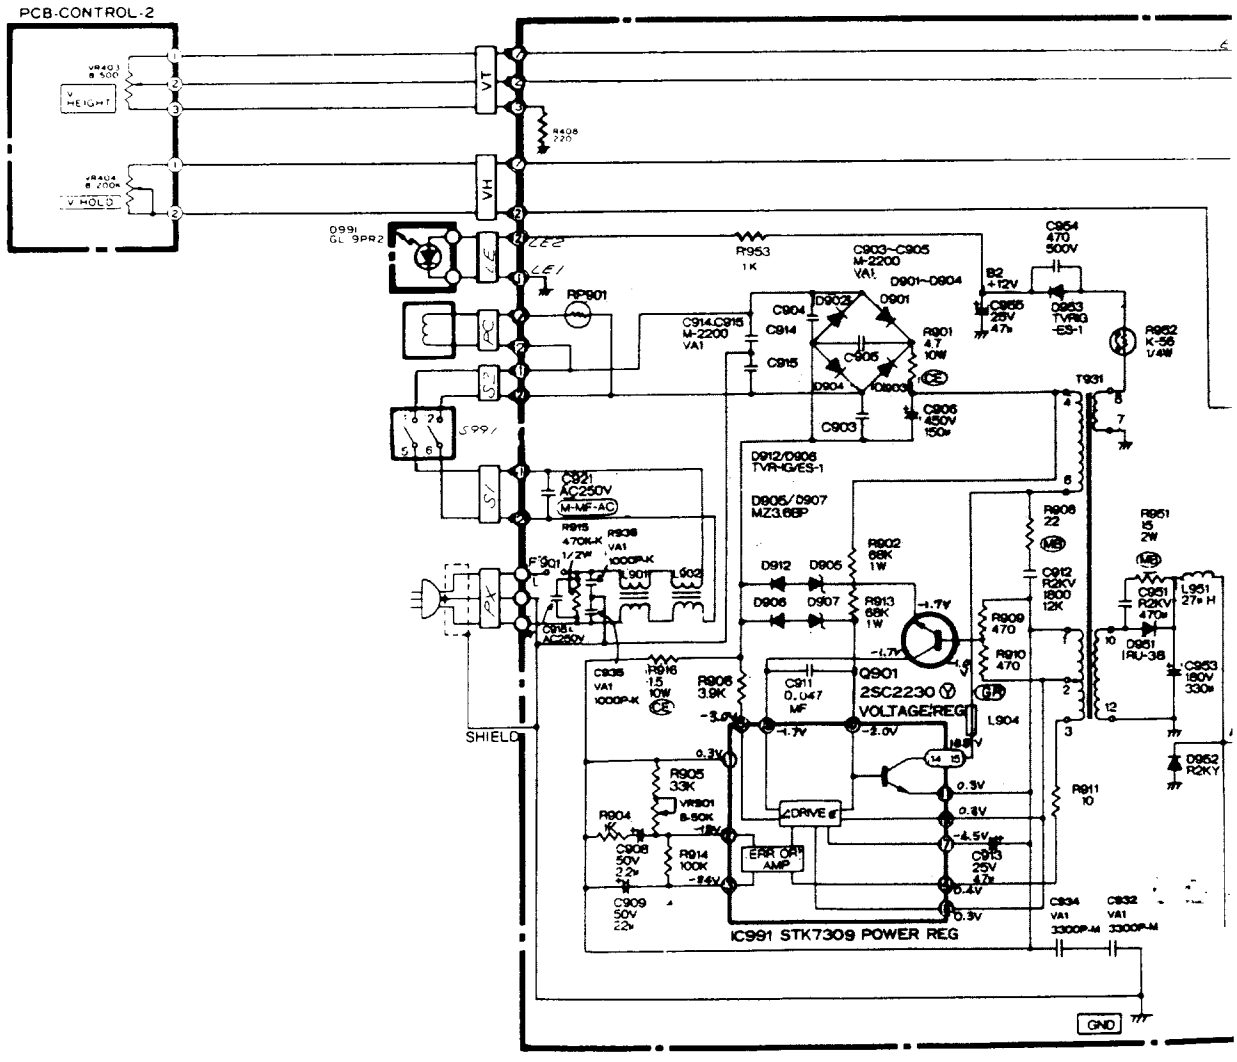

THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

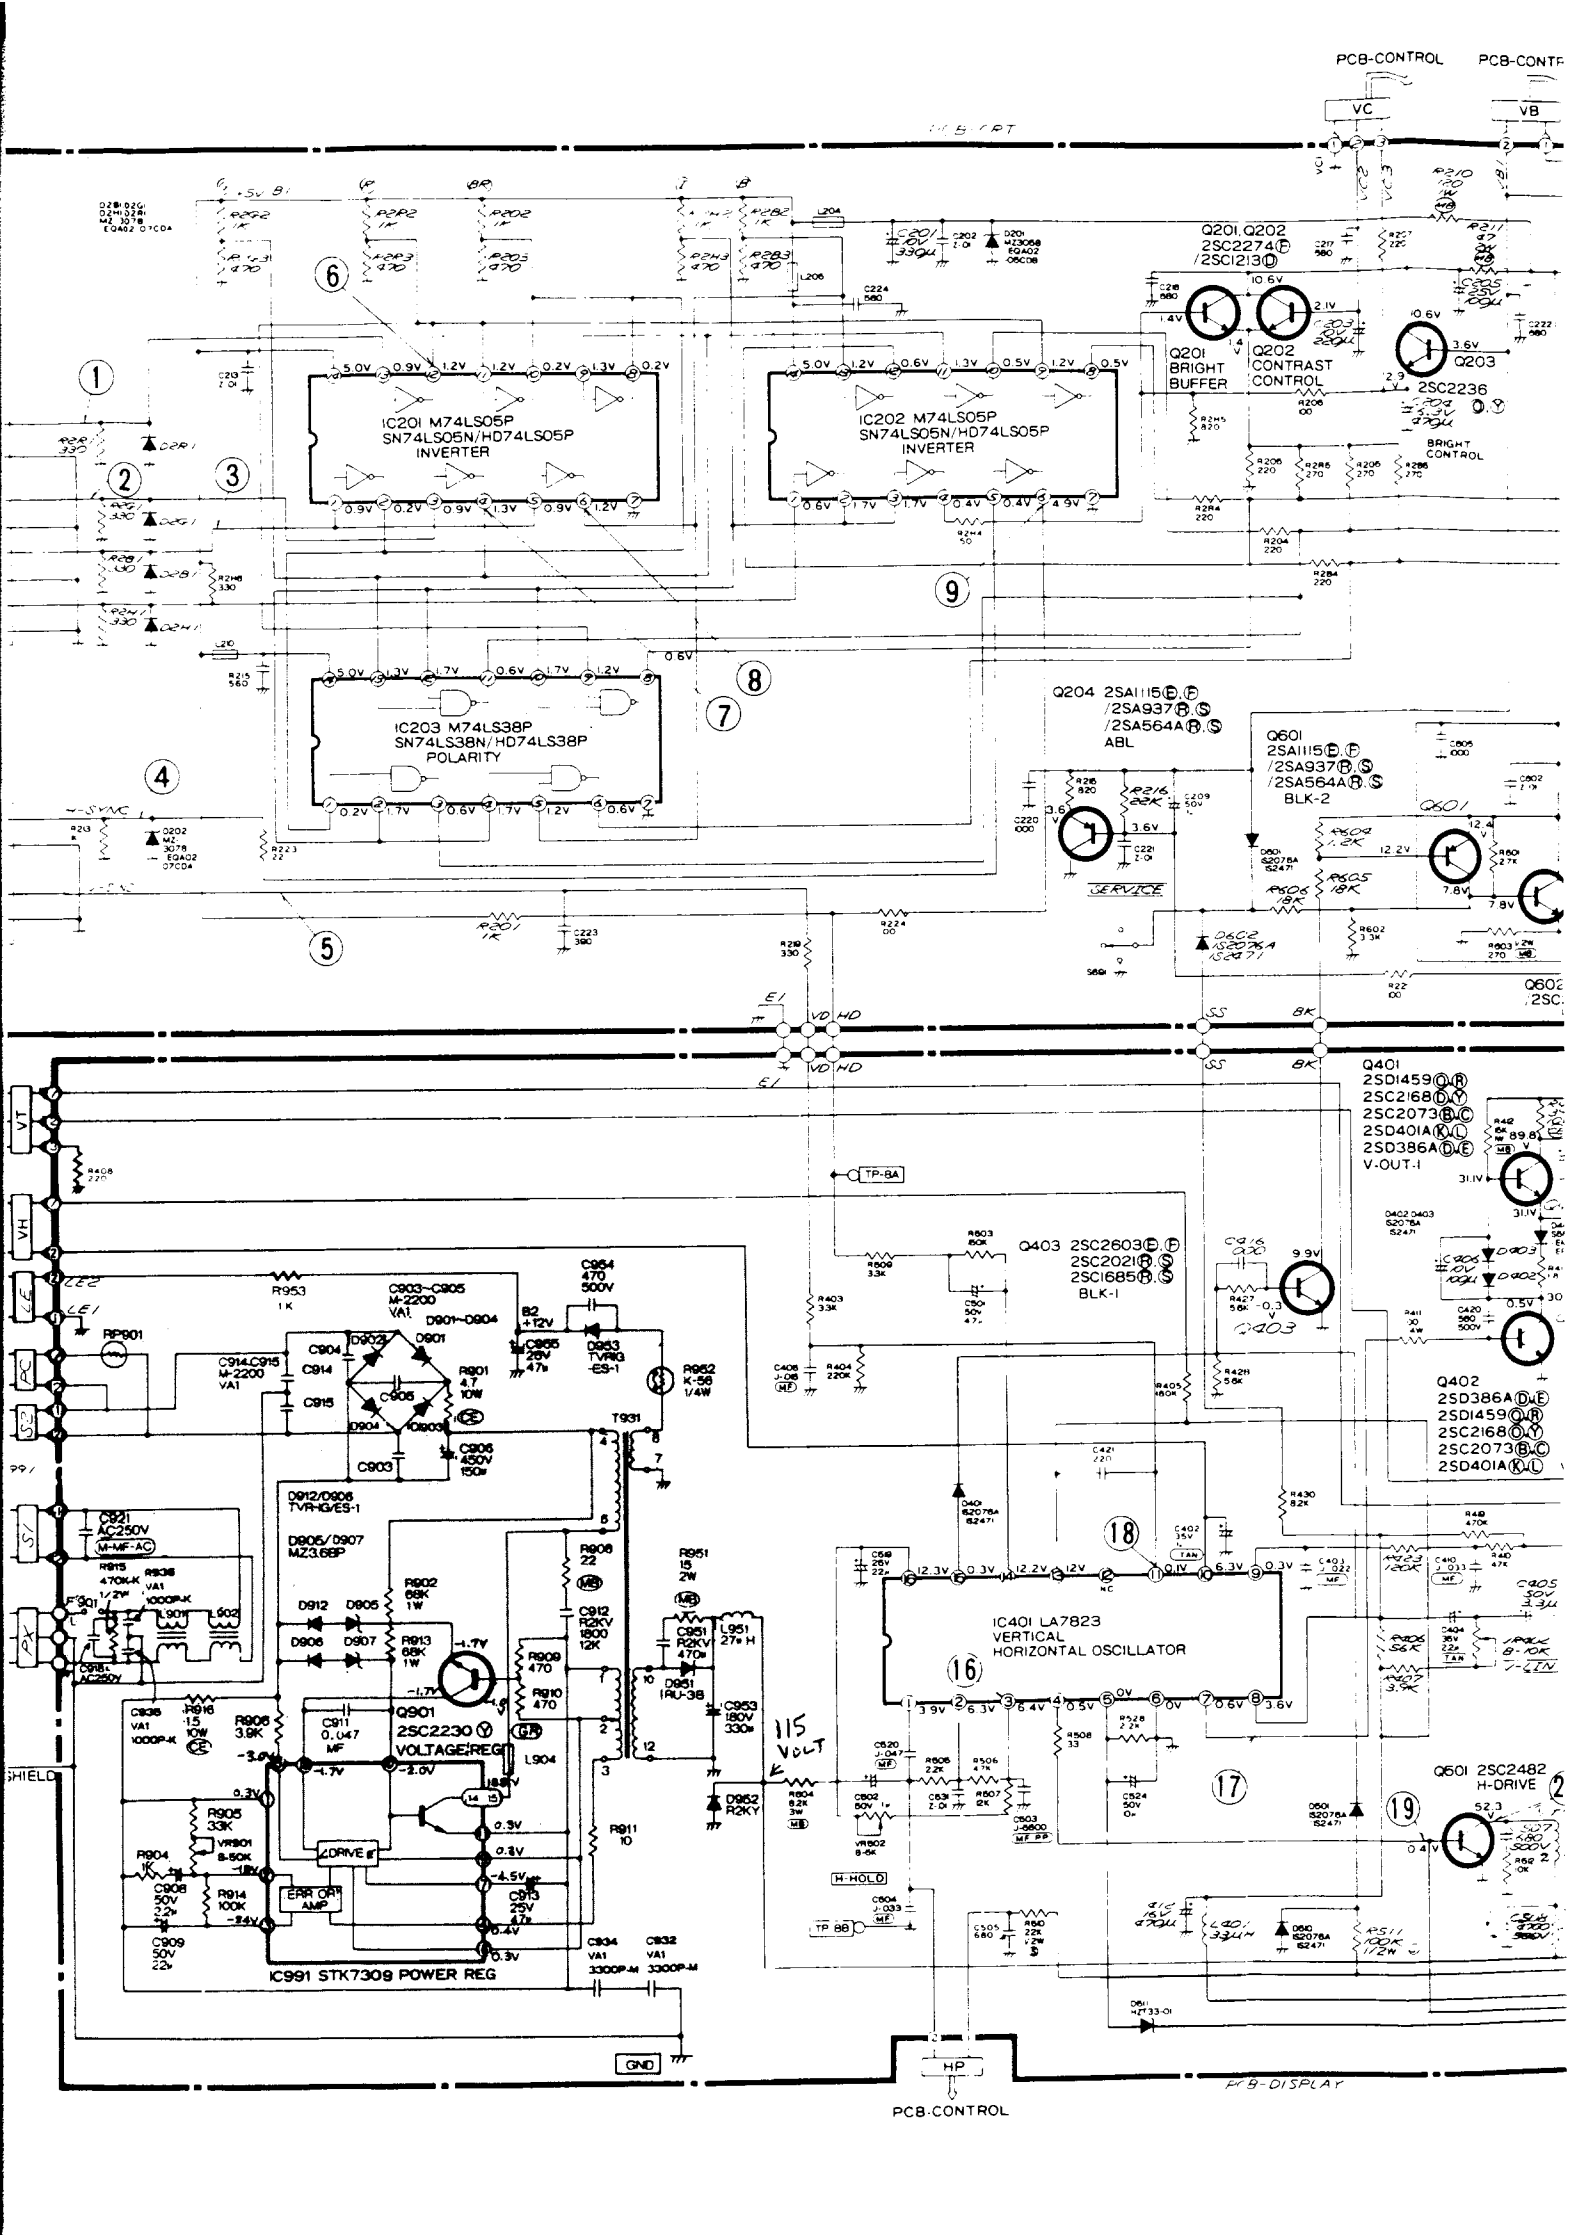
PCB-CONTROL
PCB-CONTR
VC
VB
IC201 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
IC202 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
IC203 M74LS38P
SN74LS38N/HD74LS38P
POLARITY
Q201, Q202
2SC2274(F)
/2SC2131(D)
Q201
BRIGHT
BUFFER
Q202
CONTRAST
CONTROL
Q203
2SC2236
BRIGHT
CONTROL
Q204 2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
ABL
Q601
2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
BLK-2
SERVICE
Q401
2SD1459(Q,R)
2SC2168(O,Y)
2SC2073(B,C)
2SD401A(K,L)
2SD386A(D,E)
V-OUT-I
Q403 2SC2603(E,F)
2SC2021(R,S)
2SC1685(R,S)
BLK-I
Q402
2SD386A(D,E)
2SD1459(Q,R)
2SC2168(O,Y)
2SC2073(B,C)
2SD401A(K,L)
IC401 LA7823
VERTICAL
HORIZONTAL OSCILLATOR
Q901
2SC2230(Y)
VOLTAGE REG
IC991 STK7309 POWER REG
Q501 2SC2482
H-DRIVE
115 VOLT
PCB-DISPLAY
PCB-CONTROL

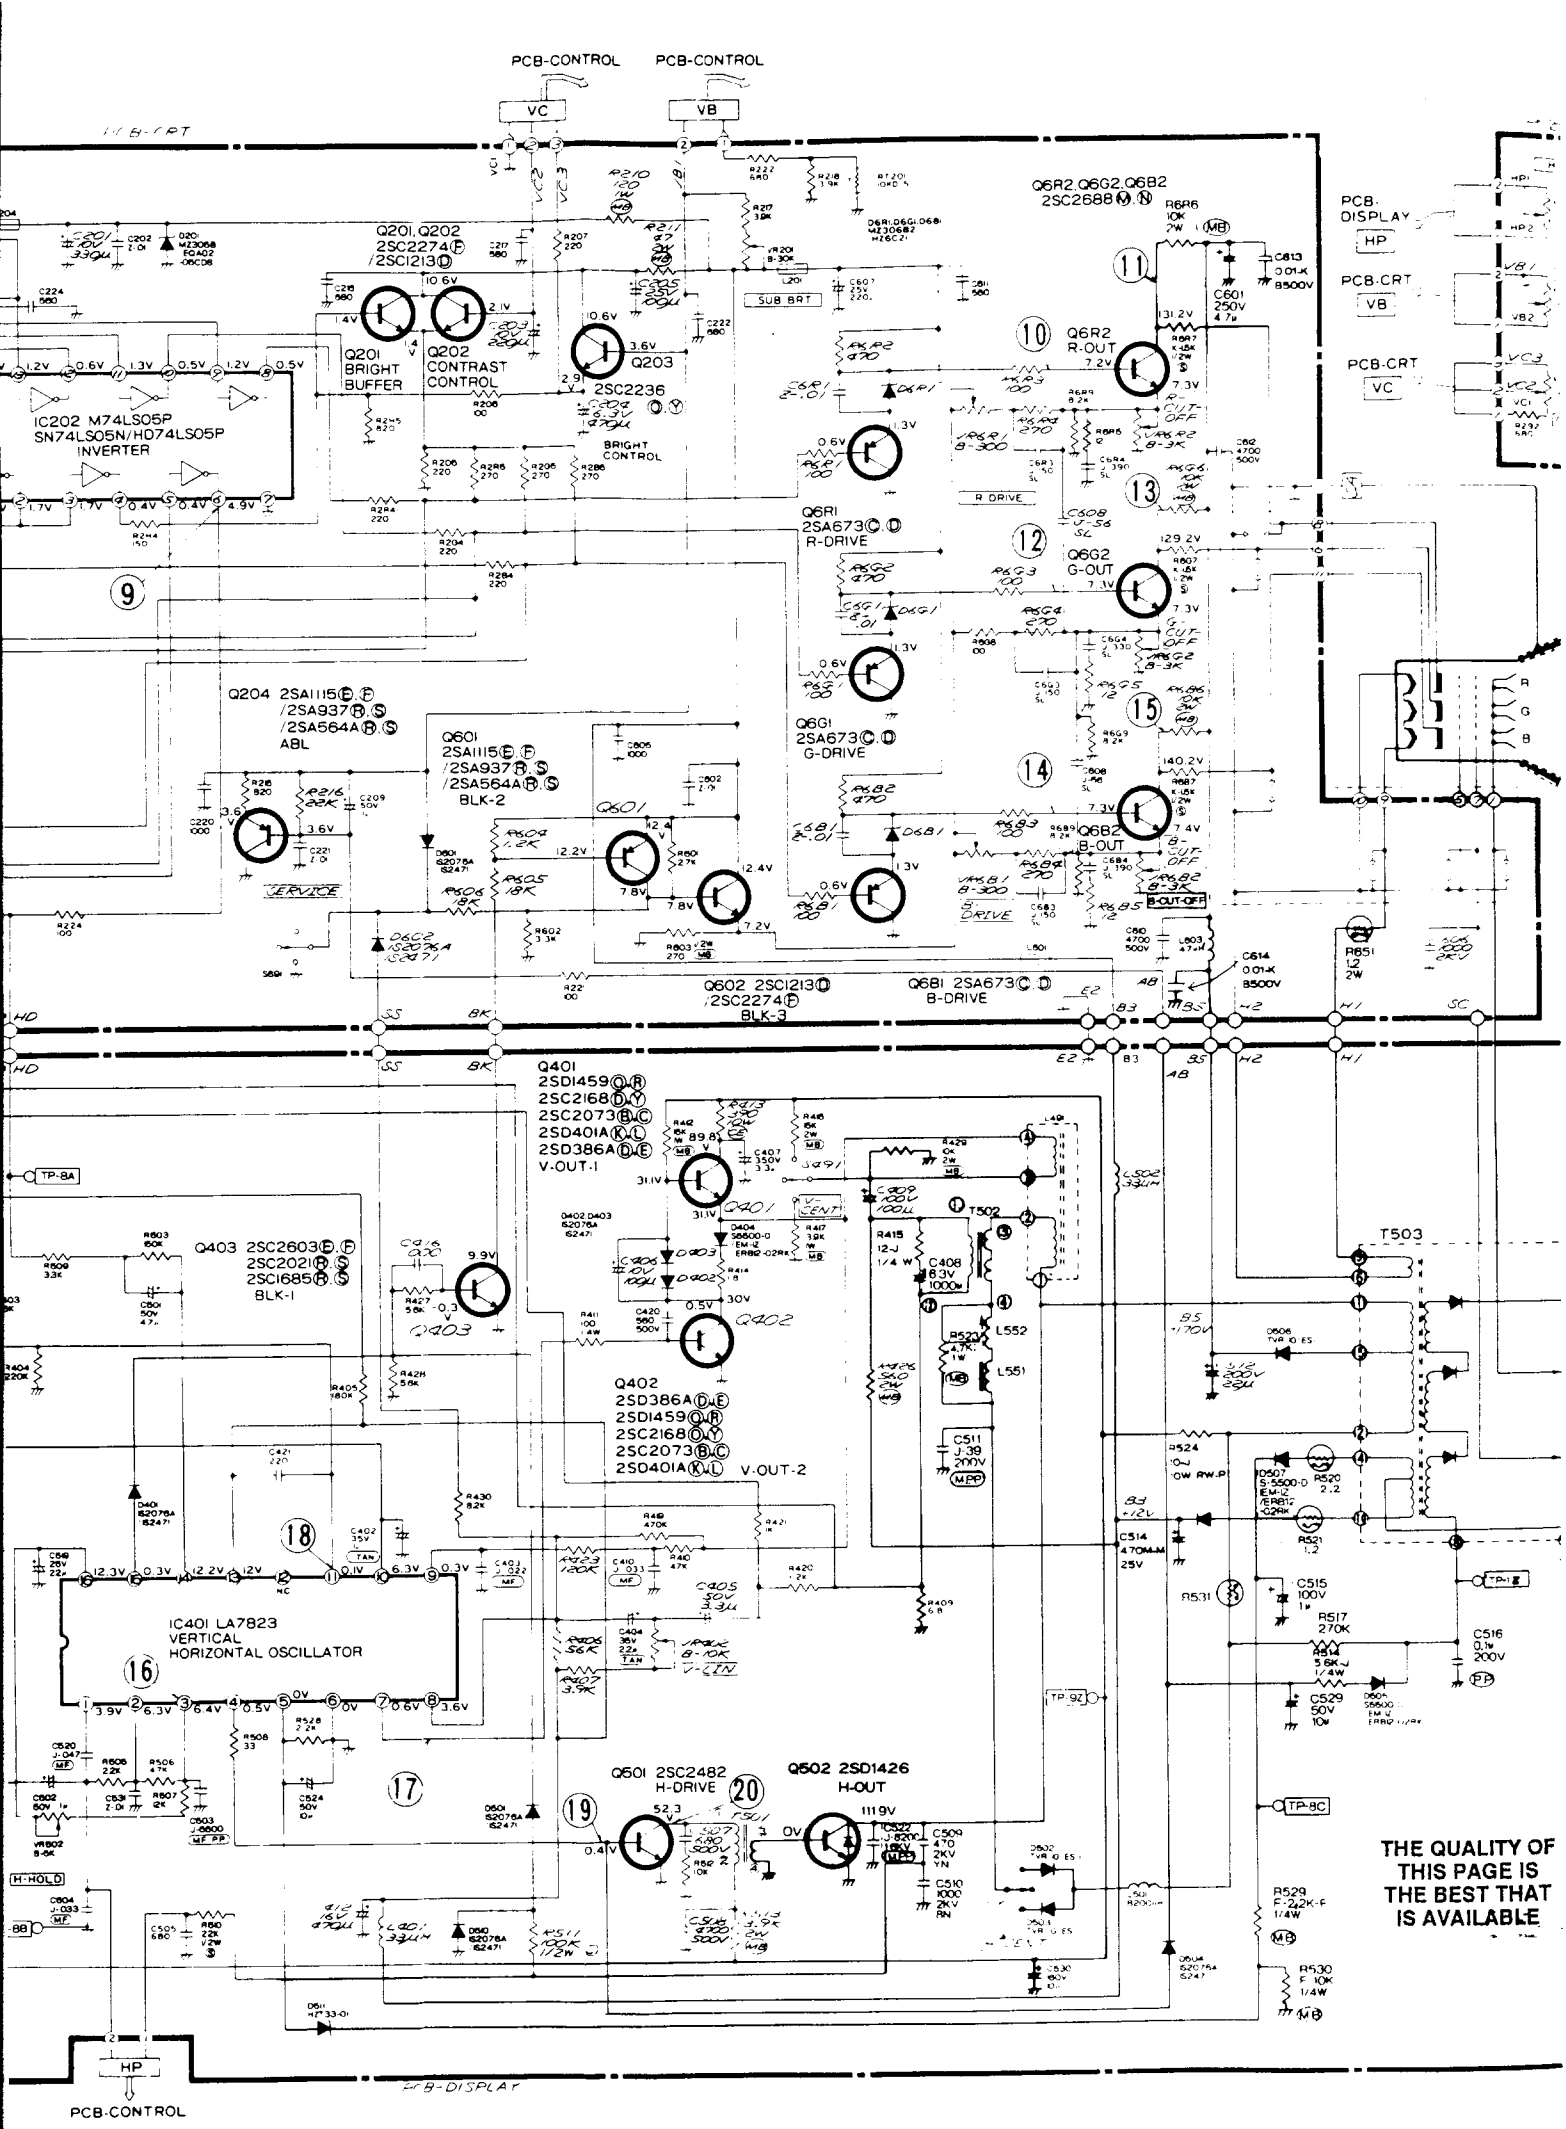
PCB-CONTROL
PCB-CONTROL
VC
VB
PCB-CRT
Q201, Q202
2SC2274(F)
/2SC1213(D)
Q201
BRIGHT
BUFFER
Q202
CONTRAST
CONTROL
Q203
2SC2236(O,Y)
BRIGHT
CONTROL
IC202 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
SUB BRT
Q6R2, Q6G2, Q6B2
2SC2688(M,N)
Q6R2
R-OUT
Q6G2
G-OUT
Q6B2
B-OUT
Q6R1
2SA673(C,D)
R-DRIVE
Q6G1
2SA673(C,D)
G-DRIVE
Q6B1 2SA673(C,D)
B-DRIVE
R-CUT-OFF
G-CUT-OFF
B-CUT-OFF
R DRIVE
G DRIVE
B DRIVE
PCB-DISPLAY
HP
PCB-CRT
VB
PCB-CRT
VC
Q204 2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
ABL
SERVICE
Q601
2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
BLK-2
Q602 2SC1213(D)
/2SC2274(F)
BLK-3
Q681 2SA673(C,D)
B-DRIVE
Q401
2SD1459(Q,R)
2SC2168(D,Y)
2SC2073(B,C)
2SD401A(K,L)
2SD386A(D,E)
V-OUT-1
Q403 2SC2603(E,F)
2SC2021(R,S)
2SC1685(R,S)
BLK-1
Q402
2SD386A(D,E)
2SD1459(Q,R)
2SC2168(D,Y)
2SC2073(B,C)
2SD401A(K,L)
V-OUT-2
IC401 LA7823
VERTICAL
HORIZONTAL OSCILLATOR
Q501 2SC2482
H-DRIVE
Q502 2SD1426
H-OUT
T501
T502
T503
H-HOLD
HP
PCB-CONTROL
PCB-DISPLAY
THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

SCHEMATIC DIAGRAM

MODEL : PM 1401

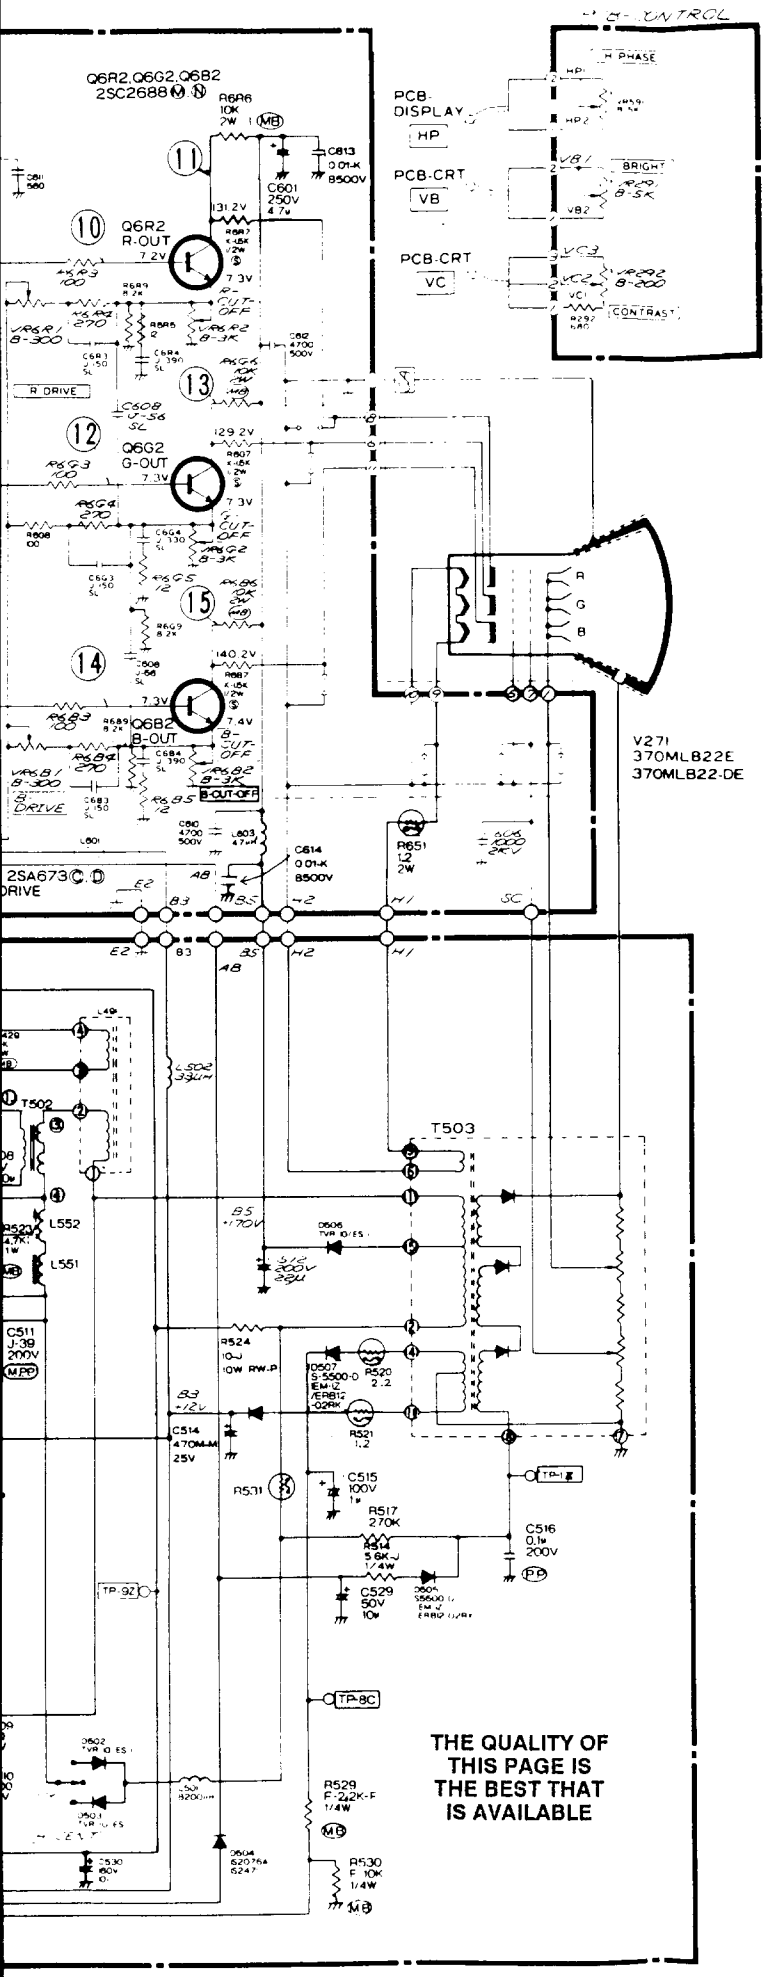

NOTE 1:

1. The unit of resistance "ohm" no symbol.
   Accordingly, K : 1000 ohms
   M : 1000K ohms
2. The wattage of resistor, if not specifically designated, is less than 1/4 watt.
3. Resistors, if not specifically designated are carbon resistors.
4. The marks of resistors are as follows

CE	Cemented resistor
MB	Metal oxide film resistor (type B)
MPC	Metal plate cement resistor
S	Fixed composition resistor
W	Wire wound resistor
M	Metal film resistor

5. The tolerance of resistor value, if not specifically designated, is J : ±5%, K : ±10%, M : ±20%
6. The unit of capacitance, if not specifically designated, is
   a) μF, for numbers less than 1
   b) PF, for numbers more than 1
7. Capacitors, if not specifically designated are Ceramic capacitors except electrolytic capacitors
8. The marks of capacitors are as follows

ALM	Aluminus electrolytic capacitor
MF	Polyester capacitor
PP	Polypropylene film capacitor
TAN	Tantalum capacitor
TF	Twin film capacitor
MF.PP	Polyester polypropylene film capacitor
MPP	Metallize plastic film capacitor
NP	Non polarized electrolytic capacitor
	Electrolytic capacitor

9. The DC working voltage of capacitor, if not specifically designated is 50V
10. The tolerance of capacitor value, if not specifically designated is ±10% for polyester capacitor
    ±5% for ceramic capacitor
    and J = ±5% K = ±10% M = ±20% P $^{+100\%}_{-0\%}$
    C = ±0.25PF D = ±0.5PF F = ±1PF Z $^{+80\%}_{-20\%}$

SPECIFIC SYMBOL

Zener Diode	Varistor
Varicap	Crystal unit
Posistor	Air Gap
Thermistor	Part (resistor) attached on the copper foil side of PCB
Fusible Resistor	Ceramic filter

NOTE 2:

1. DC voltages were measured from points indicated to the circuit ground with a VTVM.
2. Number in circle indicates waveform number.
3. This is a basic schematic diagram. Some sets may be subject to modification according to engineering improvement.

THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

SHADED COMPONENTS HAVE SPECIAL CHARACTERISTICS IMPORTANT TO SAFETY. BEFORE REPLACING ANY OF THESE COMPONENTS READ CAREFULLY THE PRODUCT SAFETY NOTICE IN THE SERVICE MANUAL. DON'T DEGRADE THE SAFETY OF THE RECEIVERS THROUGH IMPROPER SERVICING.

SERVICE MAN WARNING

X-RADIATION PRECAUTION

THIS PRODUCT INCLUDES CRITICAL ELECTRICAL AND MECHANICAL PARTS ESSENTIAL FOR X-RADIATION PROTECTION.

TO AVOID POSSIBLE EXPOSURE TO X-RADIATION TAKE X-RADIATION PROTECTIVE MEASURES FOR PERSONNEL DURING SERVICING.

SEE SERVICE INSTRUCTIONS FOR SPECIFIED REPLACEMENT PARTS AND SERVICE ADJUSTMENTS.

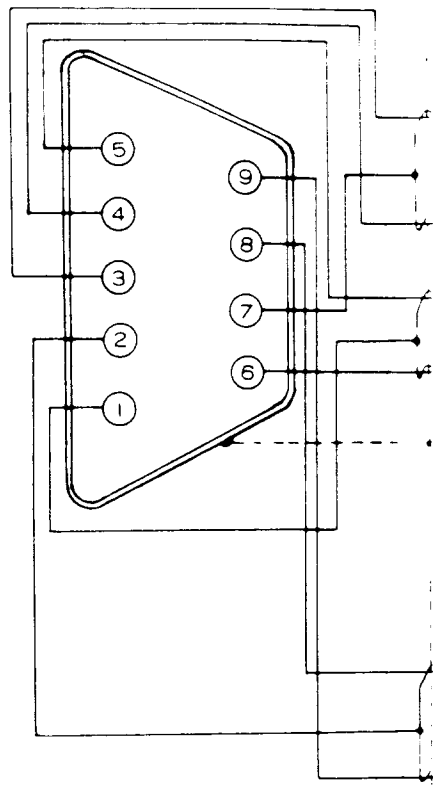

PCB-CONTROL-2

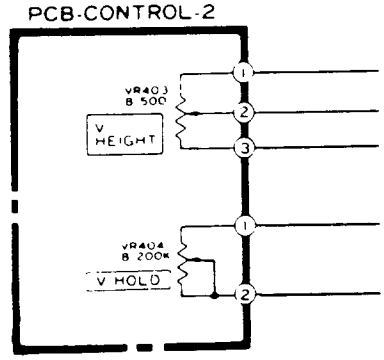

THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

CHARACTER-
REPLACING
FULLY THE
CE MANUAL.
RECEIVERS

TRICAL AND
X-RADIATION

ATION TAKE
PERSONNEL

CIFIED RE-
JUSTMENTS.

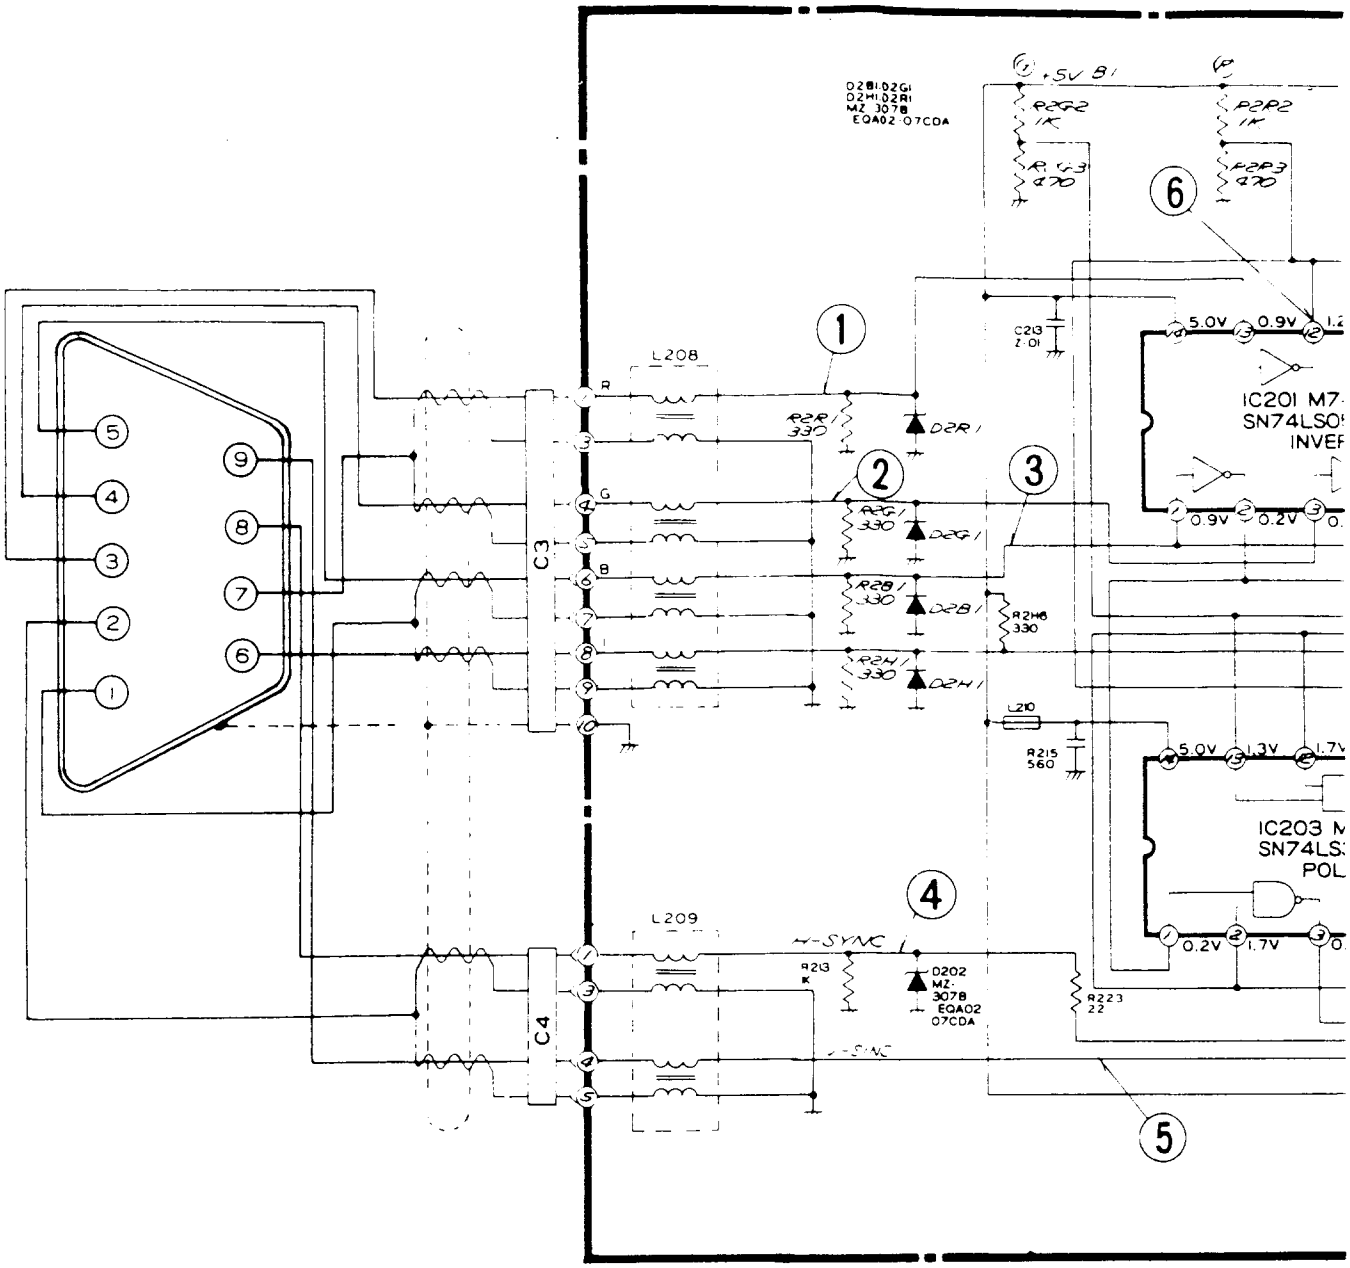

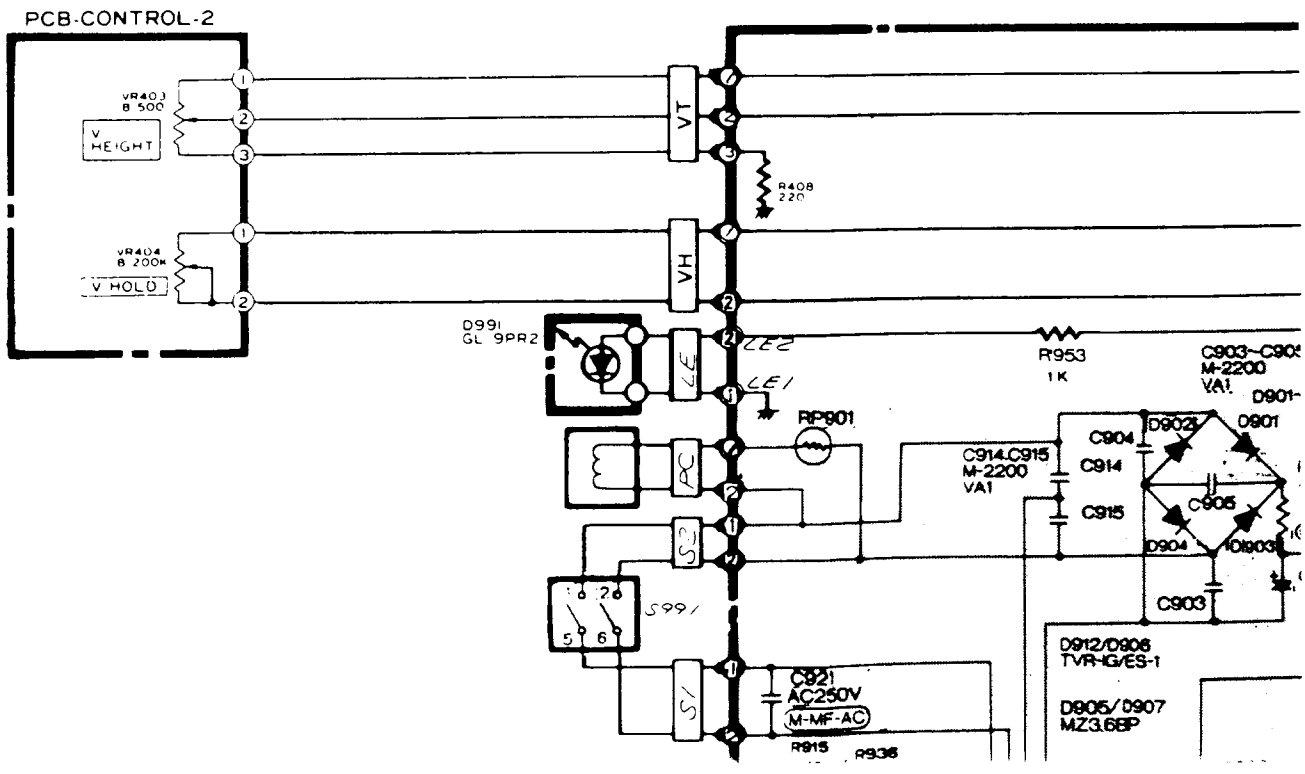

QUALITY OF
IS PAGE IS
BEST THAT
AVAILABLE

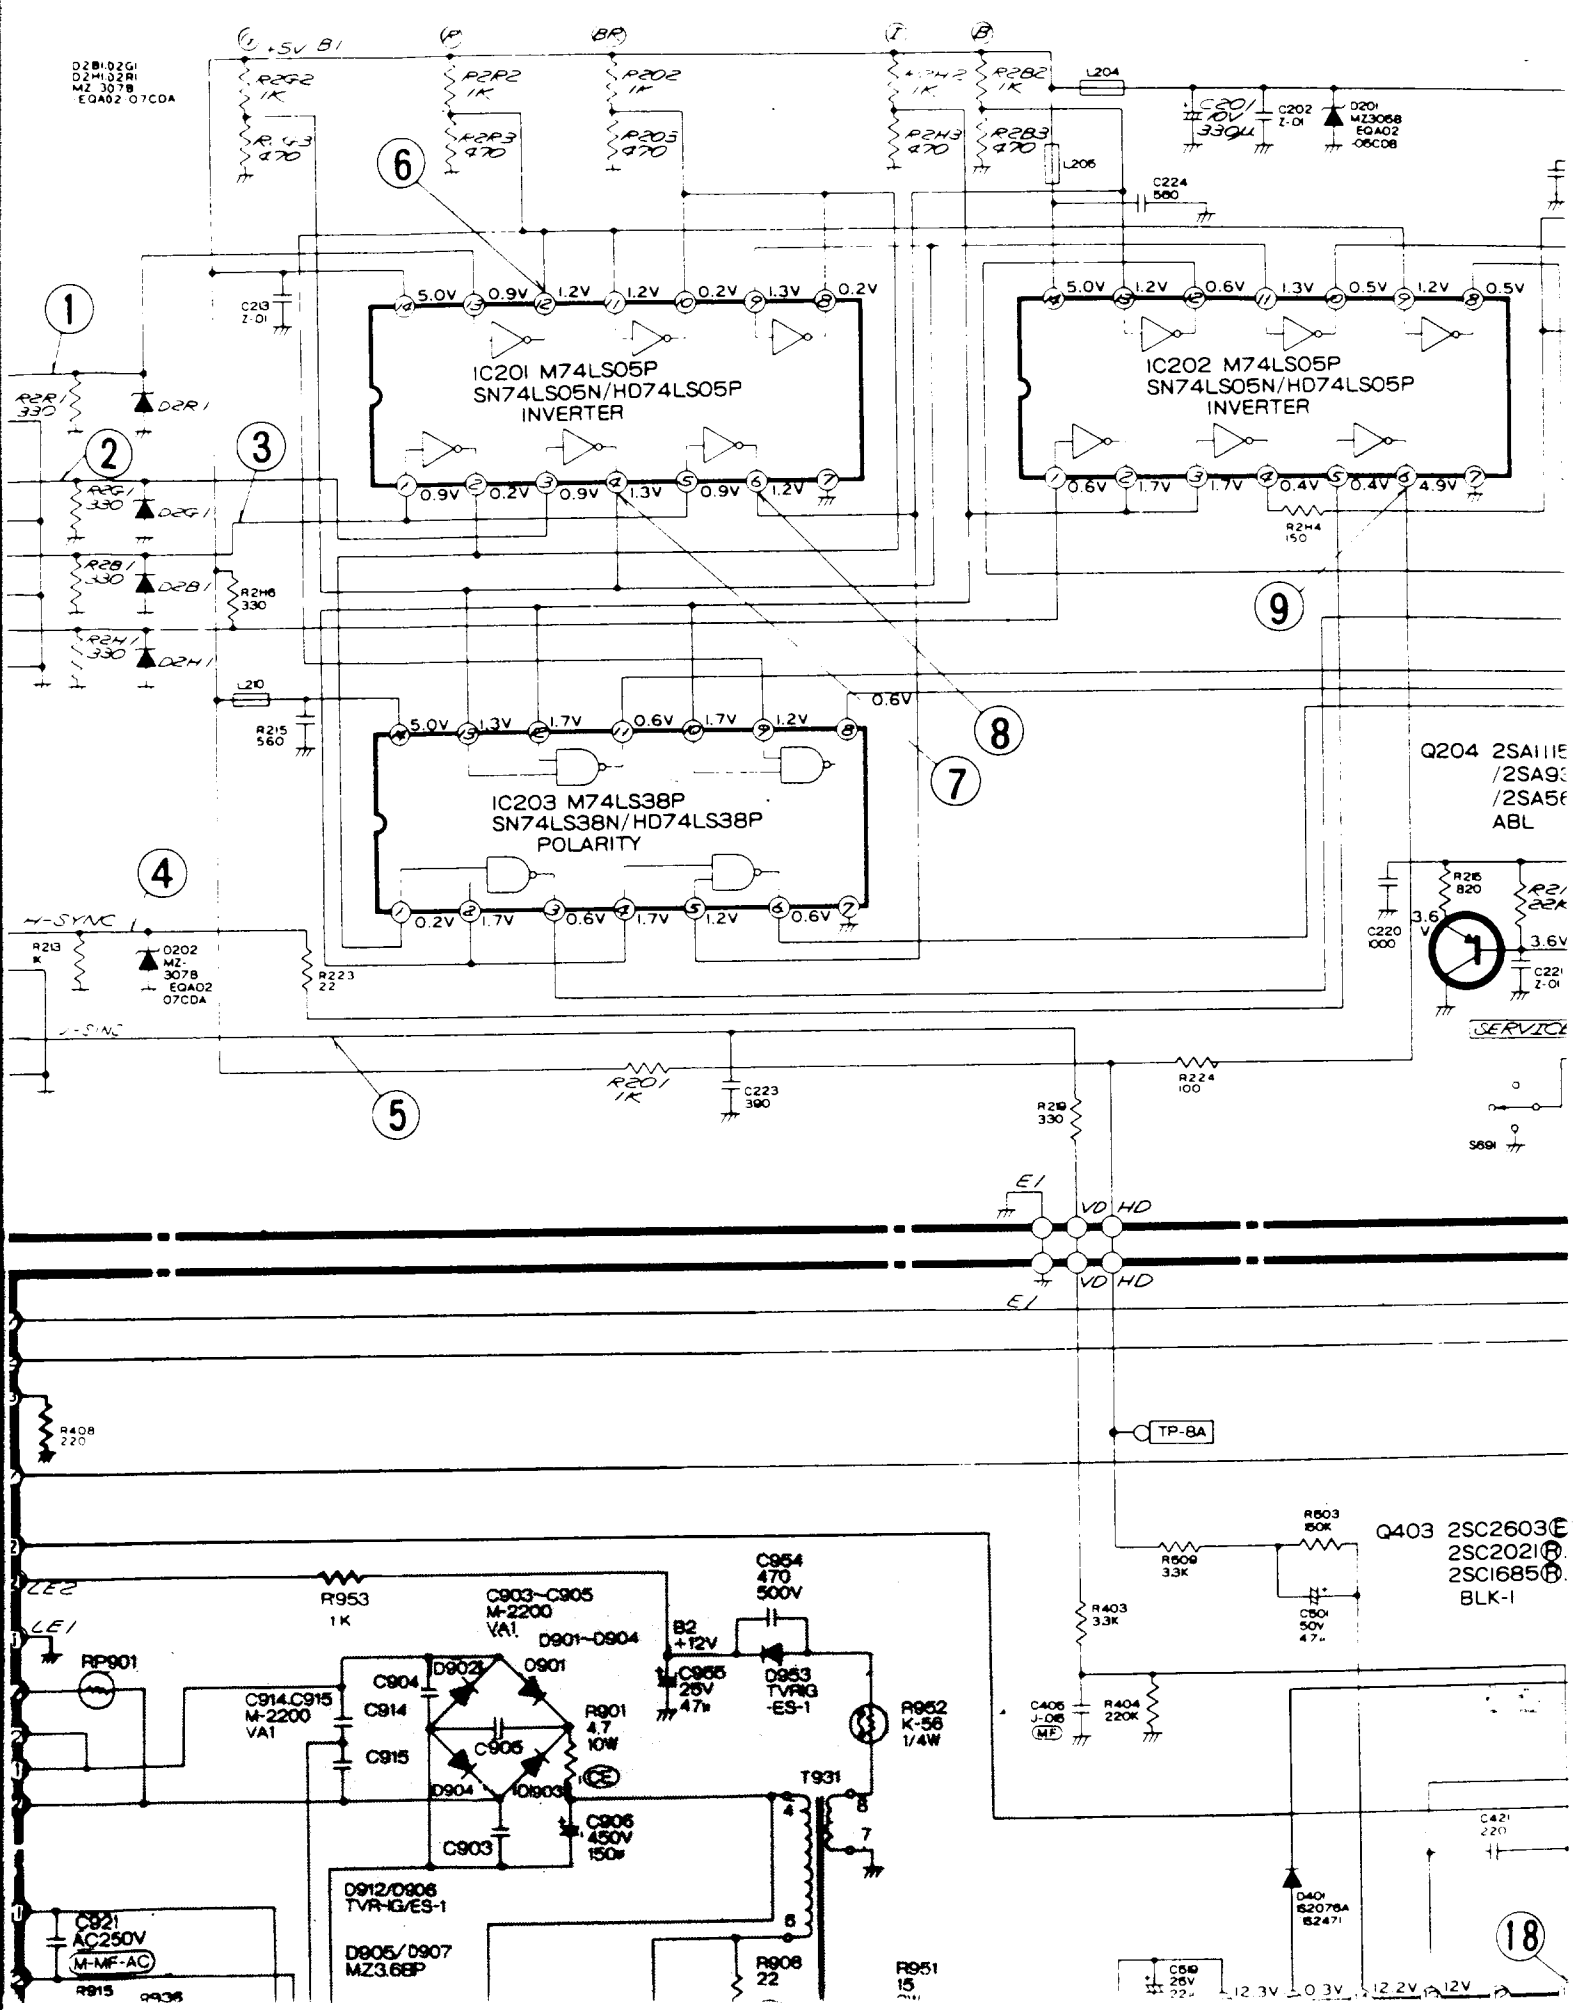
IC201 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
IC202 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
IC203 M74LS38P
SN74LS38N/HD74LS38P
POLARITY
+5V B1
B2 +12V
H-SYNC
V-SYNC
Q204 2SA1115
/2SA933
/2SA562
ABL
Q403 2SC2603(E)
2SC2021(R)
2SC1685(R)
BLK-1
TP-8A
SERVICE
RP901
T931
D912/D906
TVR-HG/ES-1
D905/D907
MZ3.6BP
D953
TVRIG
-ES-1
D401
S2076A
S2471
VD
HD
E1
E2

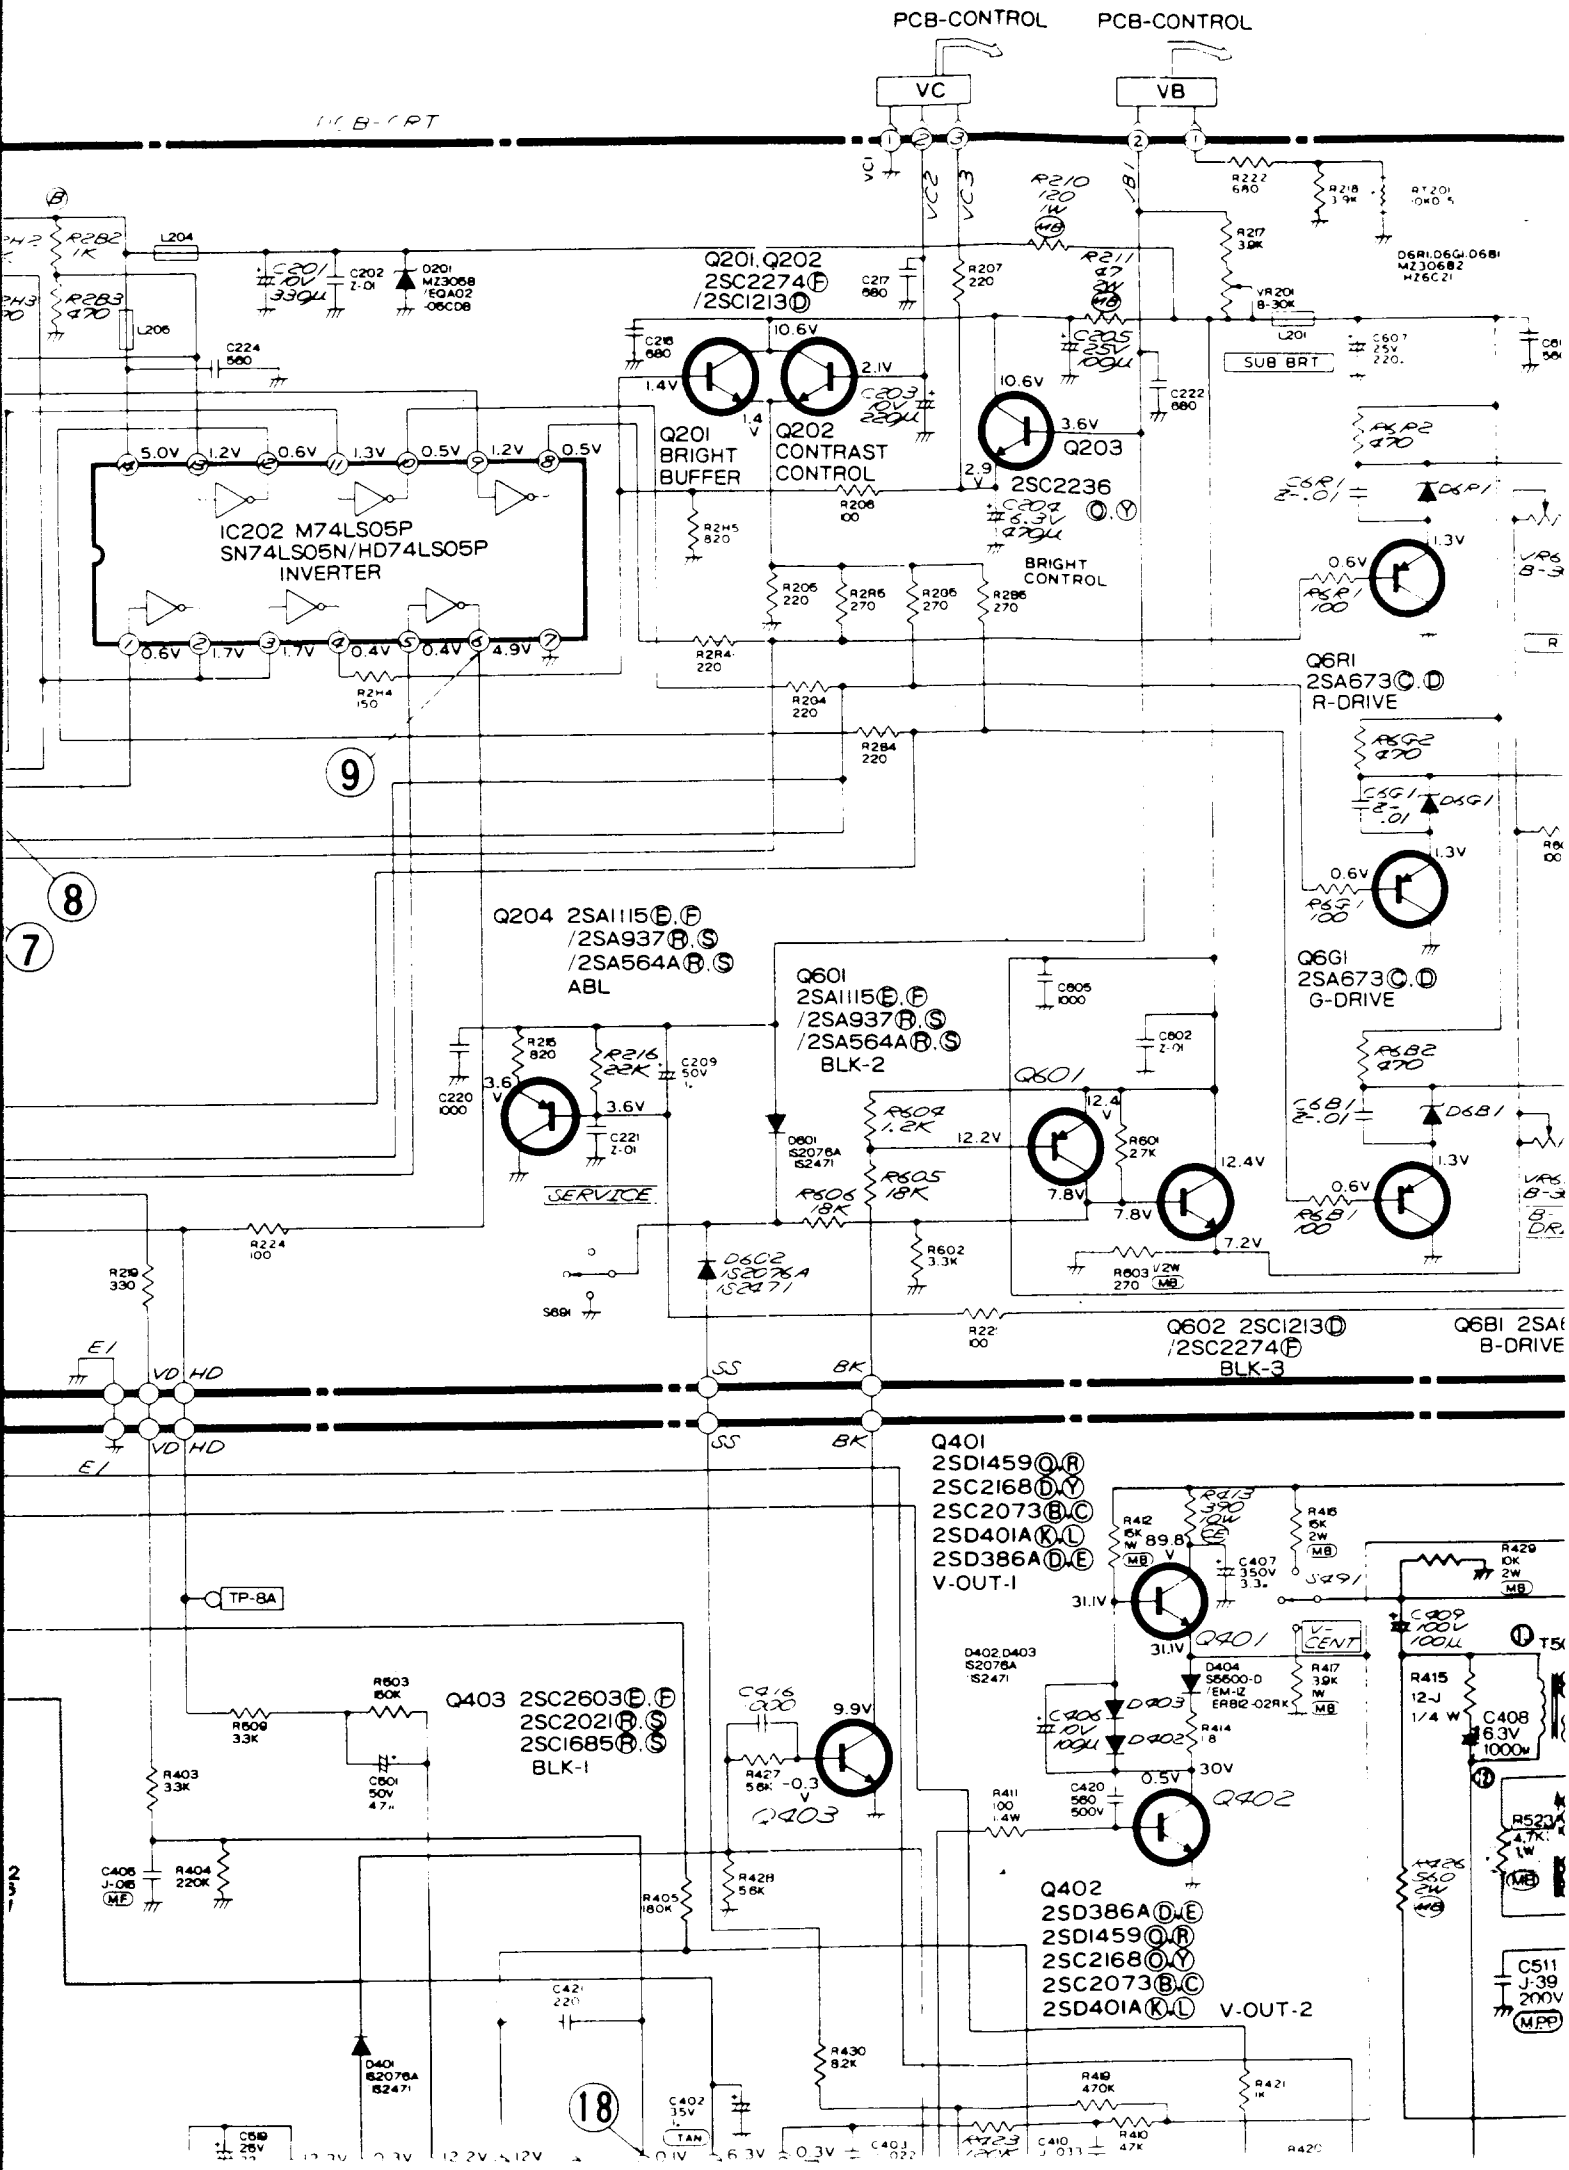
PCB-CONTROL
PCB-CONTROL
VC
VB
Q201,Q202
2SC2274(F)
/2SC1213(D)
Q201
BRIGHT
BUFFER
Q202
CONTRAST
CONTROL
Q203
2SC2236 (O,Y)
BRIGHT
CONTROL
SUB BRT
IC202 M74LS05P
SN74LS05N/HD74LS05P
INVERTER
Q6RI
2SA673(C,D)
R-DRIVE
Q6GI
2SA673(C,D)
G-DRIVE
Q204 2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
ABL
Q601
2SA1115(E,F)
/2SA937(R,S)
/2SA564A(R,S)
BLK-2
SERVICE
Q602 2SC1213(D)
/2SC2274(F)
BLK-3
Q6BI 2SA
B-DRIVE
Q401
2SD1459(Q,R)
2SC2168(D,Y)
2SC2073(B,C)
2SD401A(K,L)
2SD386A(D,E)
V-OUT-1
Q403 2SC2603(E,F)
2SC2021(R,S)
2SC1685(R,S)
BLK-1
Q402
2SD386A(D,E)
2SD1459(Q,R)
2SC2168(O,Y)
2SC2073(B,C)
2SD401A(K,L)
V-OUT-2
TP-8A
9
8
7
18

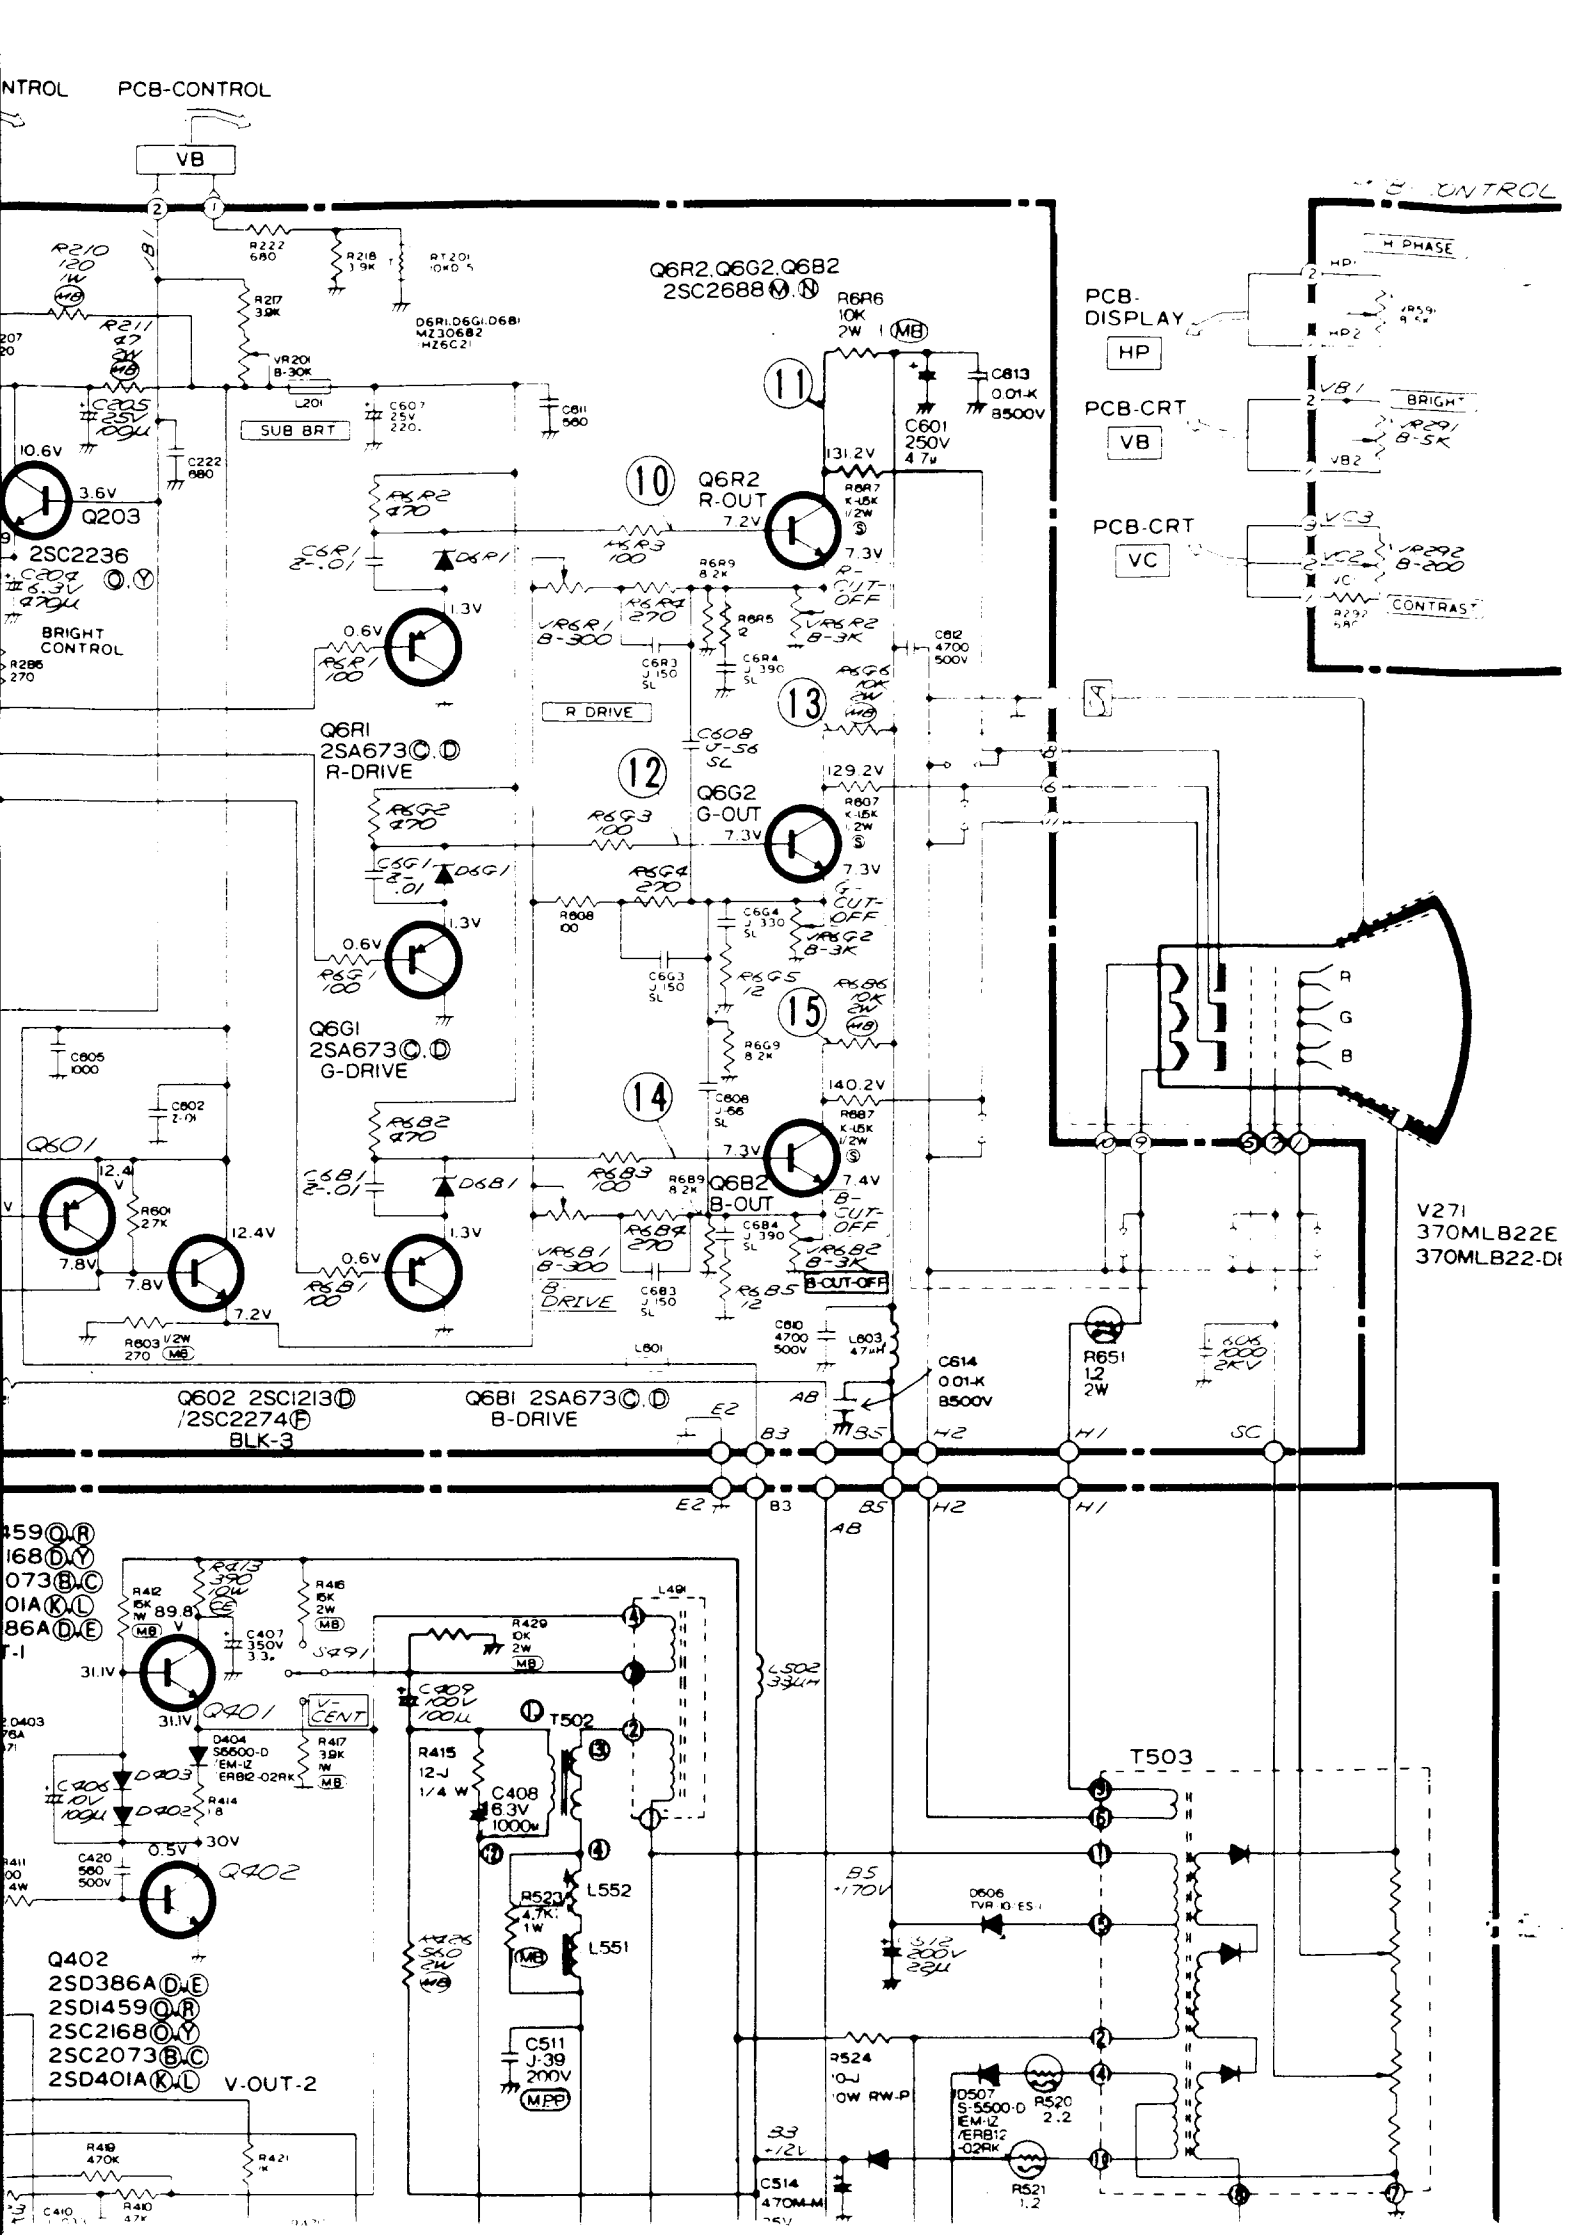
PCB-CONTROL
VB
Q6R2,Q6G2,Q6B2
2SC2688 M.N
R6R6
10K
2W
MB
C813
0.01-K
8500V
C601
250V
4.7μ
131.2V
R6R7
K-15K
1/2W
S
7.3V
R-CUT-OFF
VR6R2
B-3K
R6R5
2
C6R4
J 390
SL
C612
4700
500V
R6R4
270
VR6R1
B-300
C6R3
J 150
SL
R6R3
100
C6R1
2-.01
D6R1
R6R2
470
R6R1
100
0.6V
1.3V
Q6R2
R-OUT
7.2V
7.3V
R DRIVE
Q6R1
2SA673 C.D
R-DRIVE
C608
J-56
SL
129.2V
R6G7
K-15K
1/2W
S
7.3V
G-CUT-OFF
VR6G2
B-3K
R6G5
12
C6G4
J 330
SL
R6G4
270
R6G3
100
C6G3
J 150
SL
R6G2
470
C6G1
2-.01
D6G1
R6G1
100
R6G8
00
Q6G2
G-OUT
7.3V
Q6G1
2SA673 C.D
G-DRIVE
R6B7
10K
2W
MB
140.2V
R6B7
K-15K
1/2W
S
7.4V
B-CUT-OFF
VR6B2
B-3K
R6B5
12
C6B4
J 390
SL
R6B4
270
R6B3
100
C6B3
J 150
SL
R6B2
470
C6B1
2-.01
D6B1
R6B1
100
VR6B1
B-300
B DRIVE
Q6B2
B-OUT
7.4V
Q6B1
2SA673 C.D
B-DRIVE
R6B9
8.2K
C6B8
J-56
SL
C610
4700
500V
L603
47μH
C614
0.01-K
8500V
R651
1.2
2W
C605
1000
C602
2-.01
Q601
12.4V
R601
27K
7.8V
12.4V
7.8V
7.2V
R603
V2W
270
MB
L601
Q602 2SC1213 D
/2SC2274 F
BLK-3
Q681 2SA673 C.D
B-DRIVE
E2
B3
B5
AB
H2
H1
SC
PCB-DISPLAY
HP
PCB-CRT
VB
PCB-CRT
VC
H PHASE
HP1
HP2
VR59
4.7K
VB1
BRIGHT
VR29
B-5K
VB2
VC3
VC2
VC1
VR292
B-200
CONTRAST
R292
5.6K
V271
370ML822E
370ML822-D
R
G
B
R210
120
1W
MB
R222
680
R218
3.9K
RT201
10KΩ-5
R217
3.9K
D6R1,D6G1,D6B1
MZ30682
HZ6C2
VR201
B-30K
L201
SUB BRT
C607
25V
220
C811
560
R211
47
2W
MB
C205
25V
100μ
C222
680
10.6V
3.6V
Q203
2SC2236
C209
6.3V
220μ
BRIGHT
CONTROL
R286
270
Q401
31.1V
V-CENT
R417
3.9K
1/4W
MB
D404
S6500-D
IEM-12
ERB12-02RK
D403
D402
R414
1.8
C406
10V
100μ
0.5V
30V
C420
560
500V
Q402
R412
15K
1/4W
MB
89.8
V
R413
390
10W
R416
15K
2W
MB
C407
350V
3.3
S491
L491
R429
10K
2W
MB
C409
100V
100μ
T502
R415
12-J
1/4 W
C408
6.3V
1000μ
R523
4.7K
1W
MB
L552
L551
R524
10-J
10W RW-P
C511
J-39
200V
MPP
C502
33μH
T503
B5
+170V
D506
TVR 10-ES1
S12
200V
22μ
D507
S-5500-D
IEM-12
ERB12
-02RK
R520
2.2
R521
1.2
33
+12V
C514
470M-M
Q402
2SD386A D.E
2SD1459 Q.R
2SC2168 O.Y
2SC2073 B.C
2SD401A K.L
V-OUT-2
R419
470K
R421
R410
47K
C410

SCHEMATIC DIAGRAM

MODEL : RM 1404

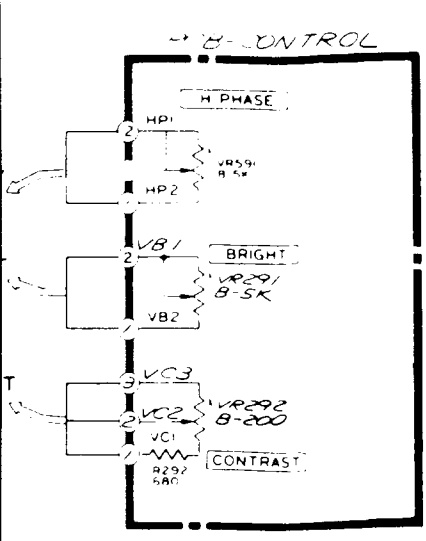

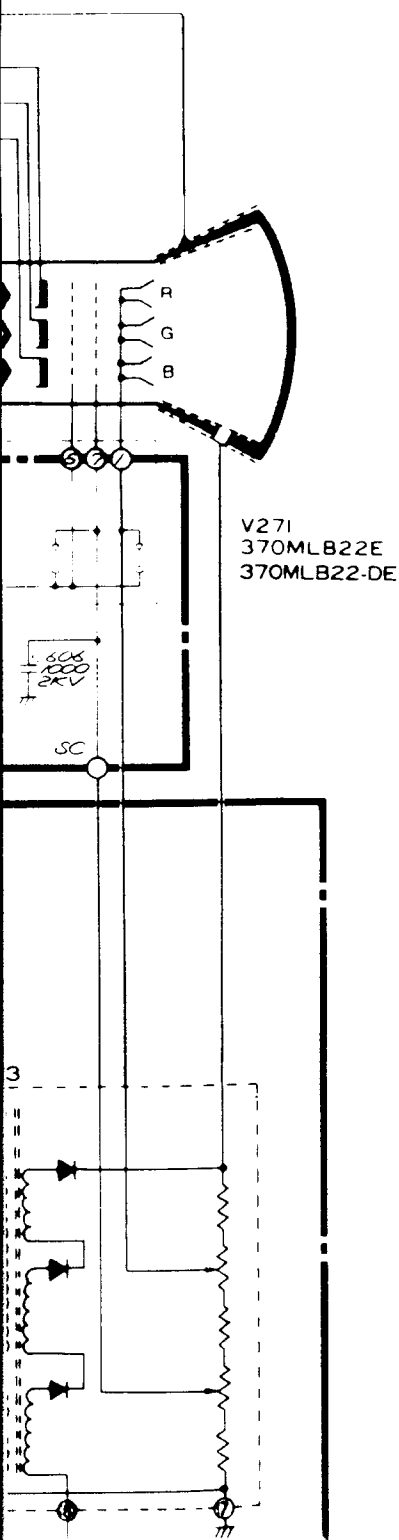

NOTE 1:

1. The unit of resistance "ohm" no symbol.
   Accordingly, K : 1000 ohms
   M : 1000K ohms.
2. The wattage of resistor, if not specifically designated, is less than 1/4 watt.
3. Resistors, if not specifically designated are carbon resistors.
4. The marks of resistors are as follows:

CE	Cemented resistor
MB	Metal oxide film resistor (type B)
MPC	Metal plate cement resistor
(S)	Fixed composition resistor
(W)	Wire wound resistor
(M)	Metal film resistor

5. The tolerance of resistor value, if not specifically designated, is: J : ±5%, K : ±10% m : ±20%
6. The unit of capacitance, if not specifically designated, is
   a) μF, for numbers less than 1
   b) PF, for numbers more than 1
7. Capacitors, if not specifically designated are Ceramic capacitors except electrolytic capacitors.
8. The marks of capacitors are as follows

ALM	Aluminus electrolytic capacitor
MF	Polyester capacitor
PP	Polypropylene film capacitor
TAN	Tantalum capacitor
TF	Twin film capacitor
MF.PP	Polyester polypropylene film capacitor.
MPP	Metallize plastic film capacitor.
NP	Non polarized electrolytic capacitor.
⏚	Electrolytic capacitor

9. The DC working voltage of capacitor, if not specifically designated is: 50V
10. The tolerance of capacitor value, if not specifically designated is: ±10% for polyester capacitor
    ±5% for ceramic capacitor
    and J = ±5% K = ±10% M = ±20% P = $^{+100\%}_{-\ 0\%}$
    C = ±0.25PF D = ±0.5PF F = ±1PF Z = $^{+80\%}_{-20\%}$

SPECIFIC SYMBOL	

THROUGH IMPROPER SERVICING.

SERVICE MAN WARNING

X-RADIATION PRECAUTION

THIS PRODUCT INCLUDES CRITICAL ELECTRICAL AND MECHANICAL PARTS ESSENTIAL FOR X-RADIATION PROTECTION.

TO AVOID POSSIBLE EXPOSURE TO X-RADIATION TAKE X-RADIATION PROTECTIVE MEASURES FOR PERSONNEL DURING SERVICING.

SEE SERVICE INSTRUCTIONS FOR SPECIFIED REPLACEMENT PARTS AND SERVICE ADJUSTMENTS.

PCB-CONTROL-2

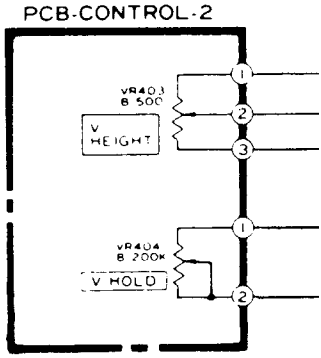

THE QUALITY OF
THIS PAGE IS
THE BEST THAT
IS AVAILABLE

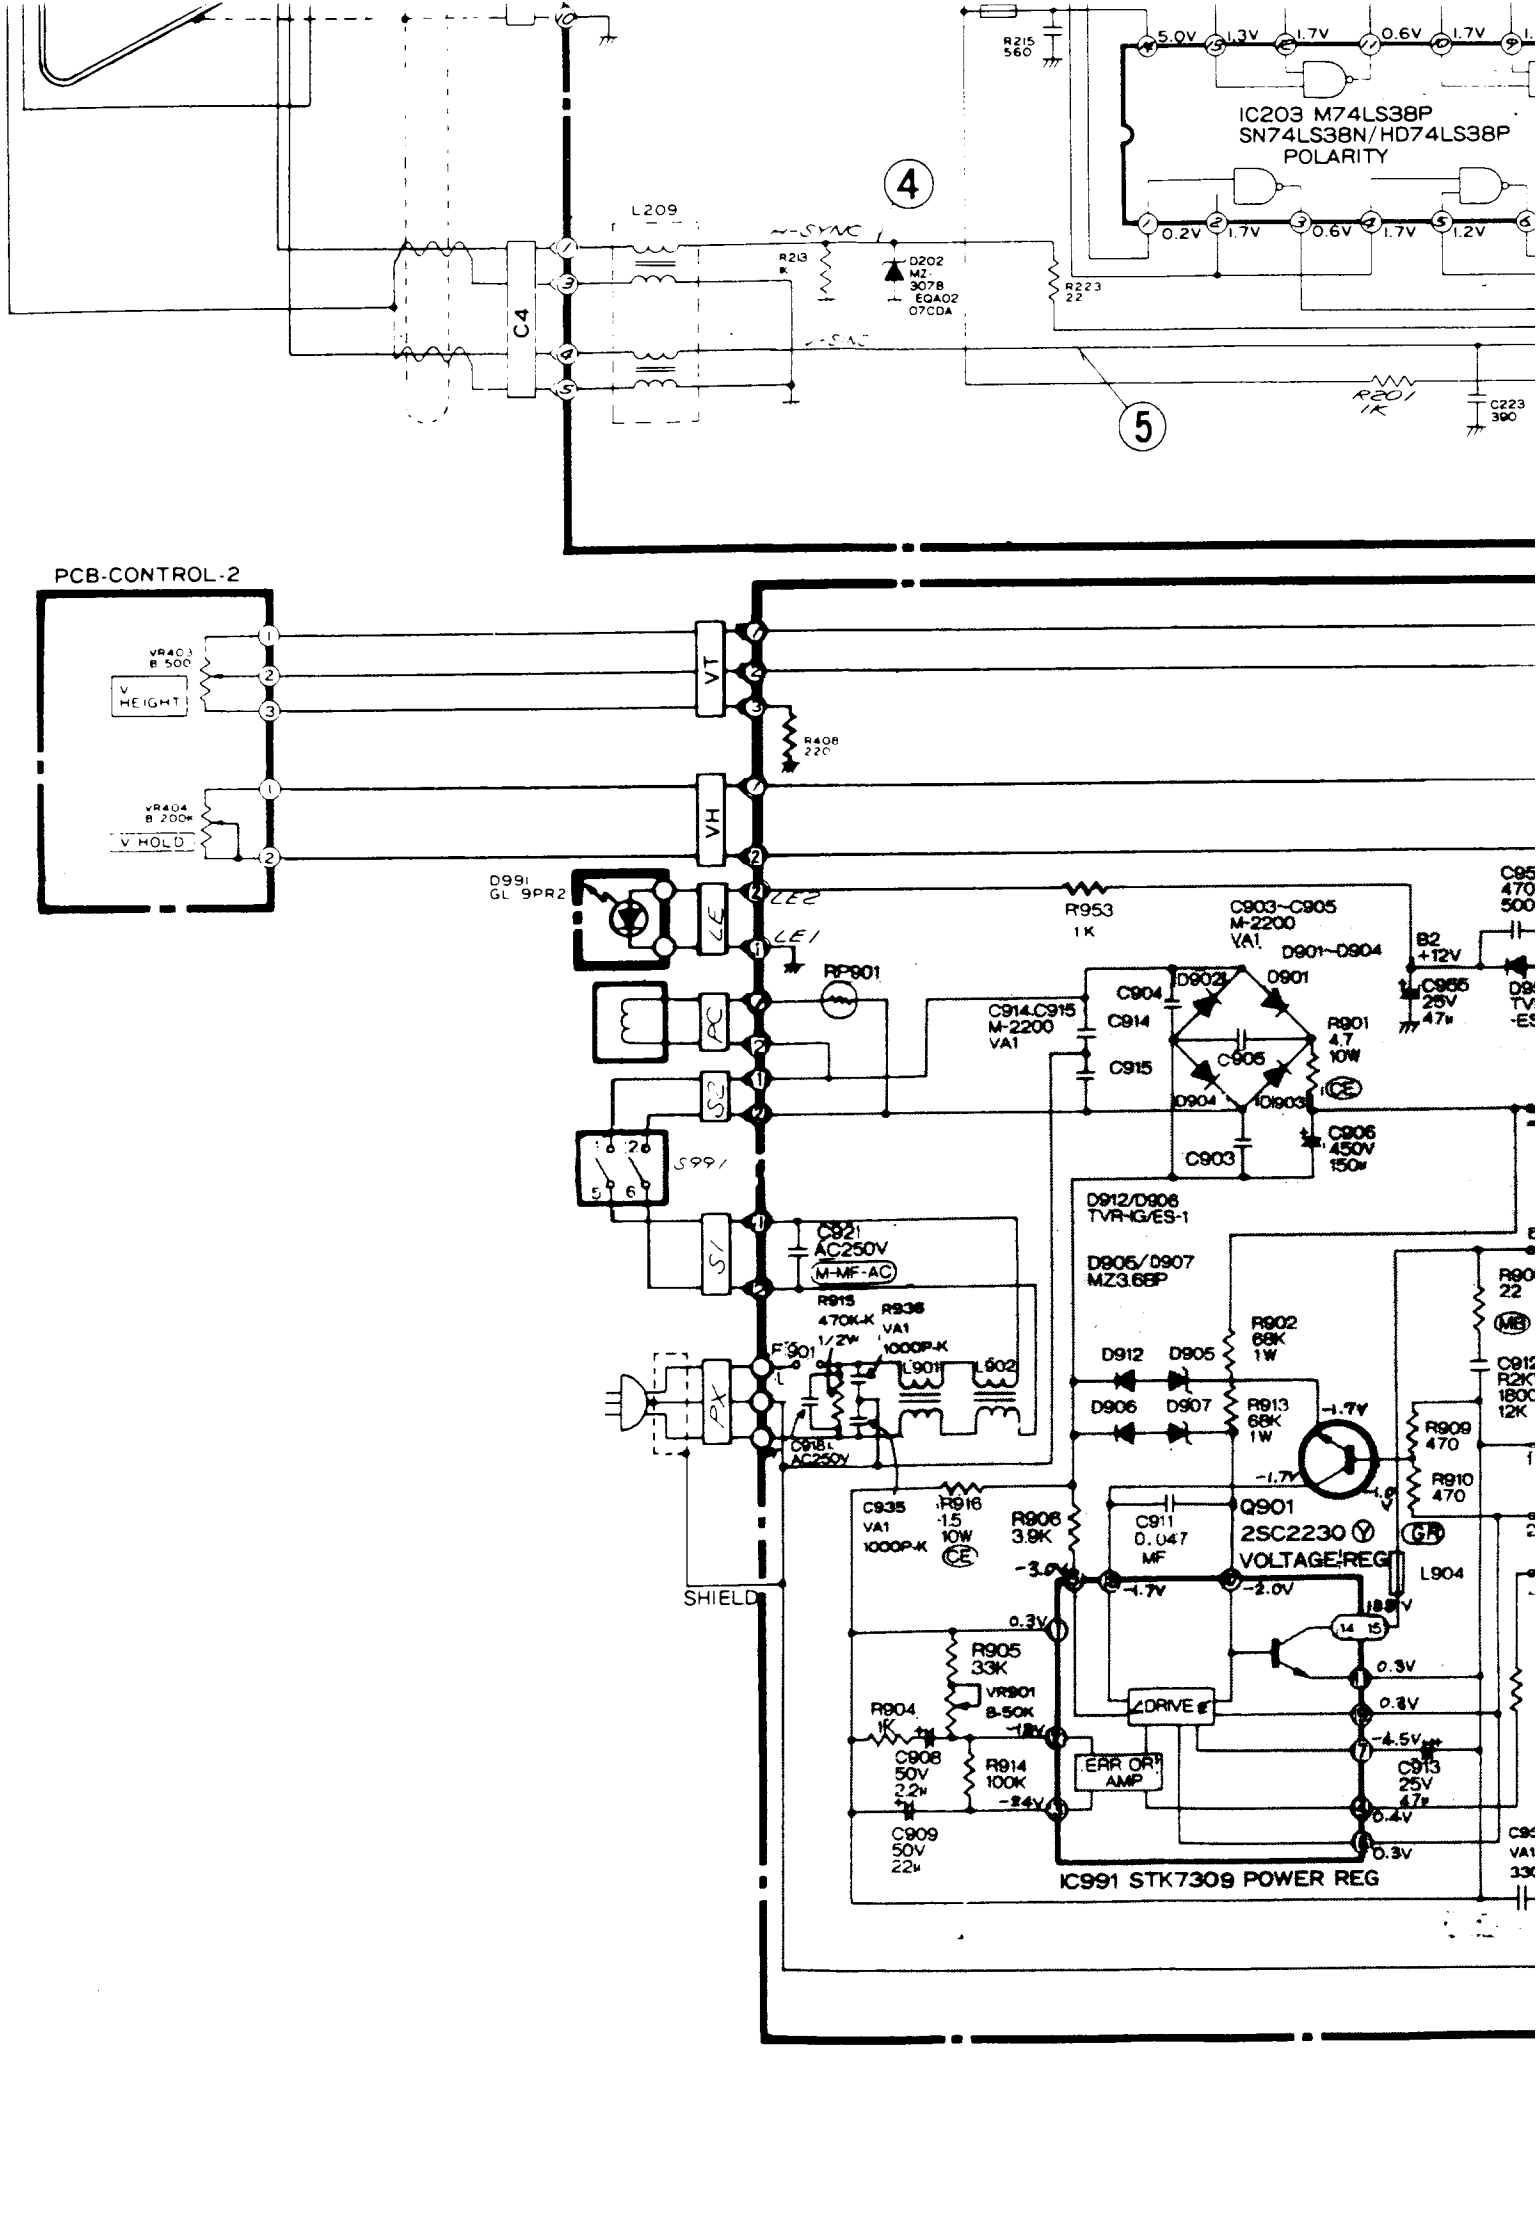
IC203 M74LS38P
SN74LS38N/HD74LS38P
POLARITY
5.0V
1.3V
1.7V
0.6V
1.7V
0.2V
1.7V
0.6V
1.7V
1.2V
R215
560
L209
R213
D202
MZ-3078
EQA02
07CDA
R223
22
R201
1K
C223
390
C4
4
5
PCB-CONTROL-2
VR403
B 500
V HEIGHT
VR404
B 200K
V HOLD
VT
VH
R408
220
D991
GL 9PR2
LE2
LE1
RP901
R953
1K
C903~C905
M-2200
VA1
D901~D904
B2
+12V
C914.C915
M-2200
VA1
C904
C914
C915
D902
D901
D903
D904
C905
R901
4.7
10W
C906
450V
150
C903
S991
D912/D906
TVRHG/ES-1
D905/D907
MZ3.6BP
C921
AC250V
M-MF-AC
R915
470K-K
R936
VA1
1000P-K
1/2W
F901
L901
L902
C918
AC250V
R902
68K
1W
D912
D905
D906
D907
R913
68K
1W
-1.7V
R909
470
R910
470
C935
VA1
1000P-K
R916
1.5
10W
R906
3.9K
C911
0.047
MF
Q901
2SC2230
VOLTAGE REG
L904
-3.0V
-4.7V
-2.0V
0.3V
R905
33K
VR901
B-50K
R904
1K
C908
50V
2.2
R914
100K
-2.4V
DRIVE
ERR OR AMP
-4.5V
C913
25V
4.7
0.4V
C909
50V
22
SHIELD
IC991 STK7309 POWER REG

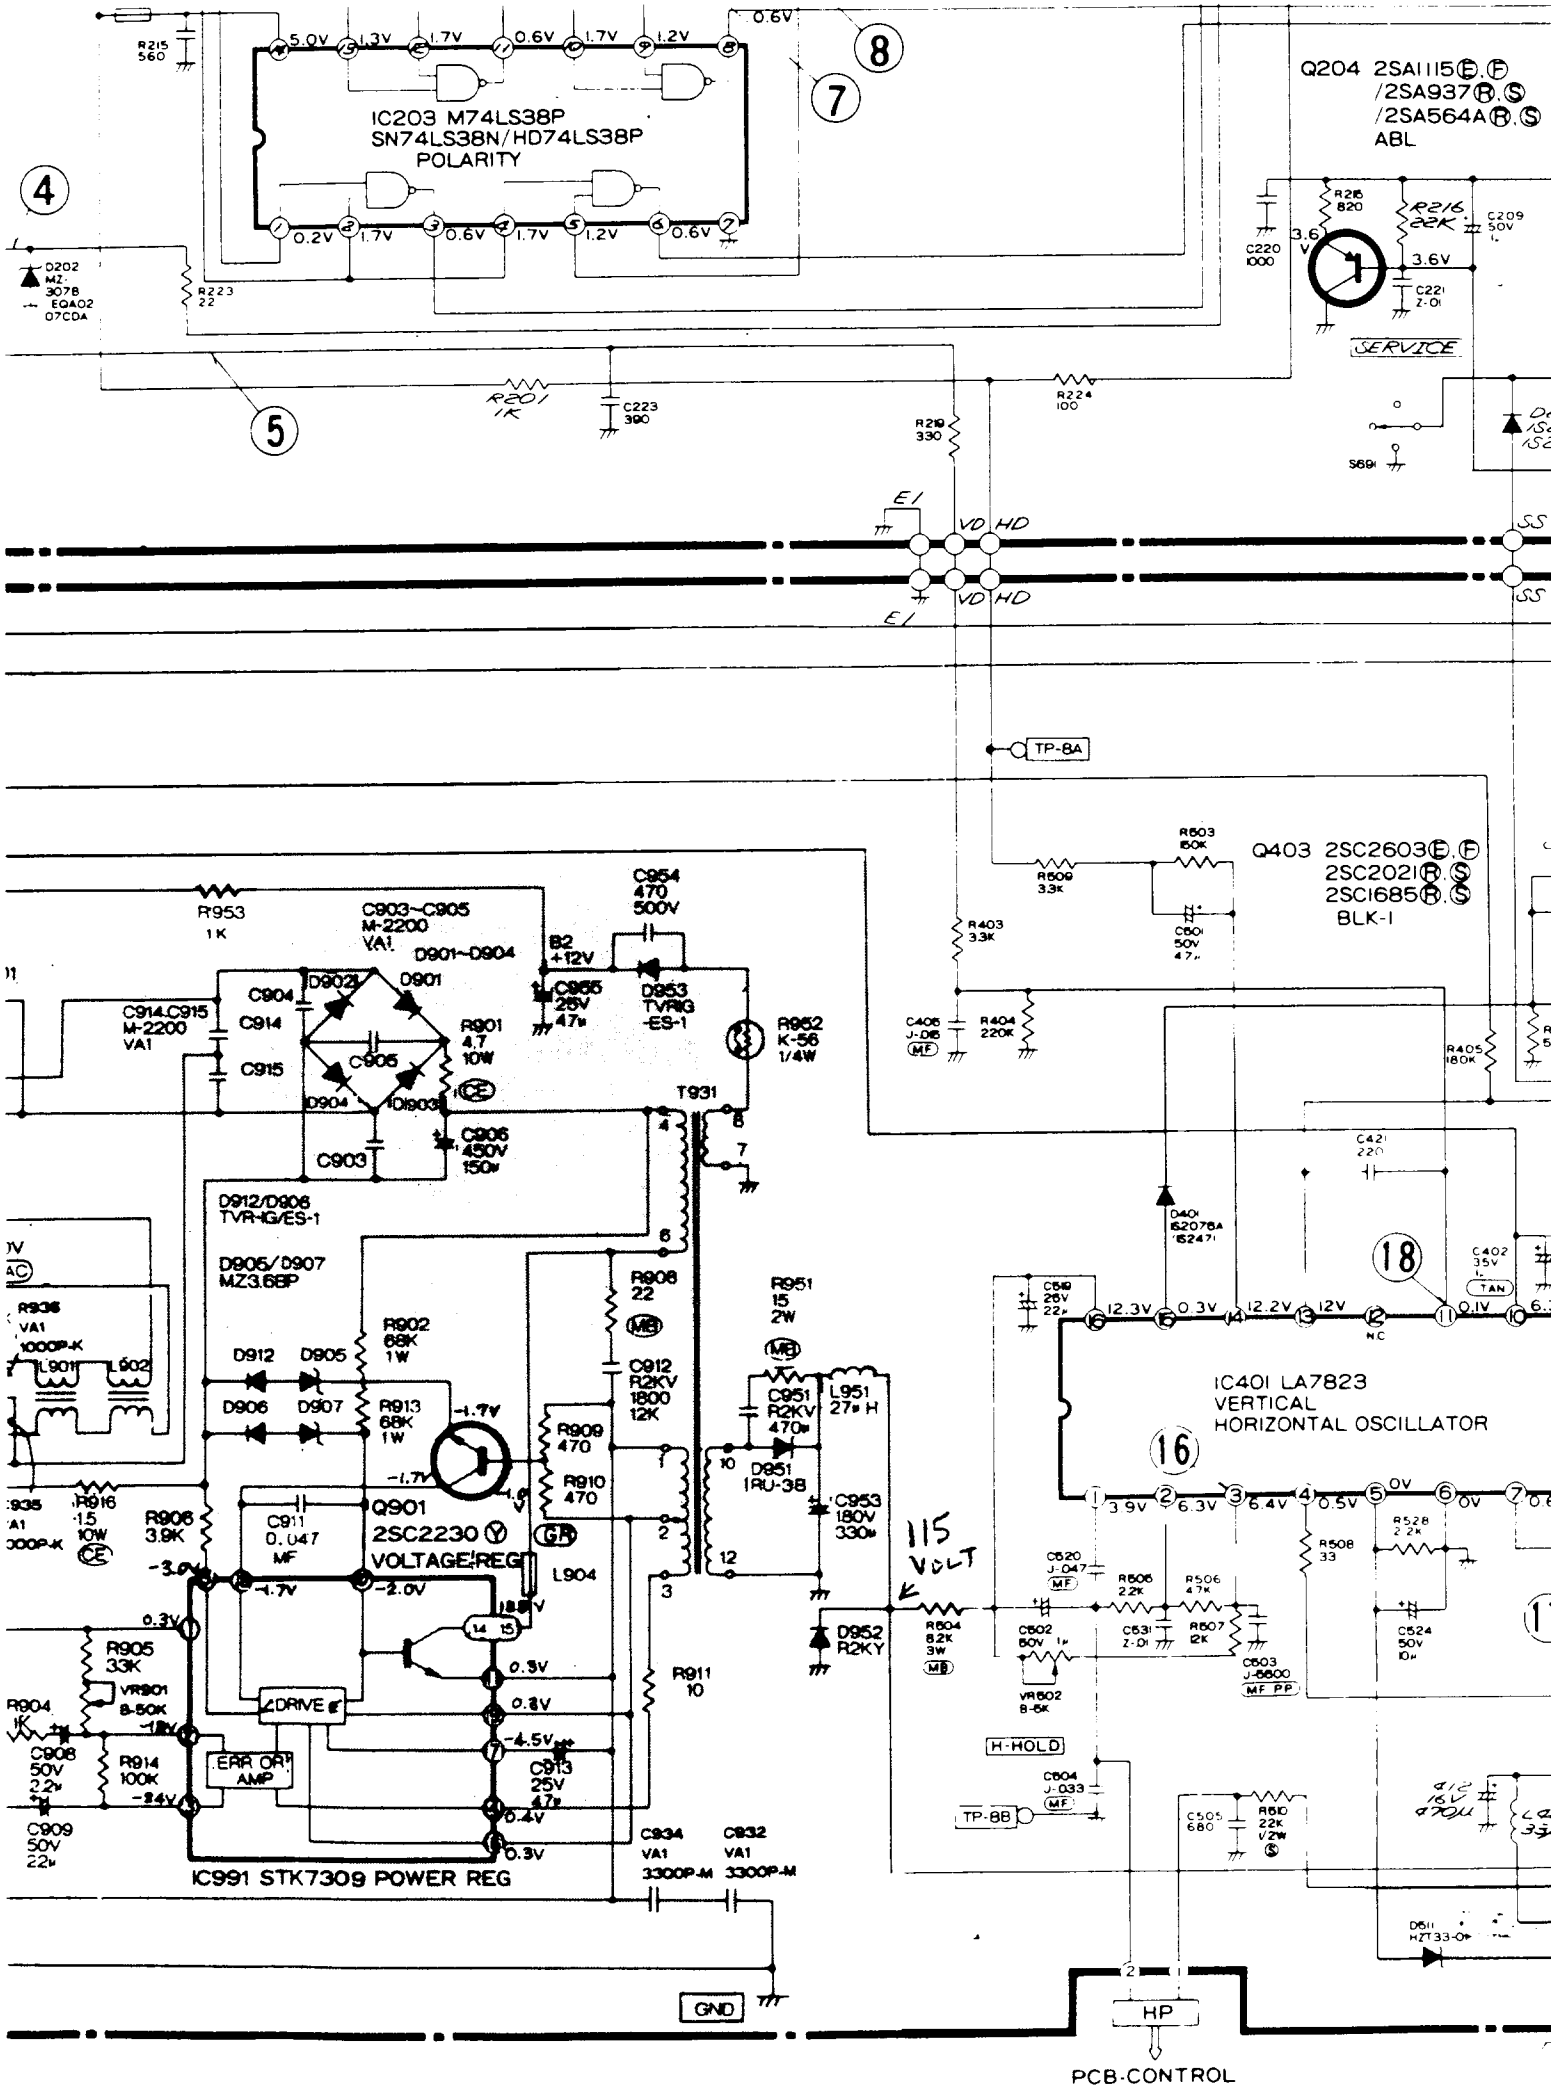
IC203 M74LS38P
SN74LS38N/HD74LS38P
POLARITY
Q204 2SA1115Ⓔ,Ⓕ
/2SA937Ⓡ,Ⓢ
/2SA564AⓇ,Ⓢ
ABL
SERVICE
Q403 2SC2603Ⓔ,Ⓕ
2SC2021Ⓡ,Ⓢ
2SC1685Ⓡ,Ⓢ
BLK-I
IC401 LA7823
VERTICAL
HORIZONTAL OSCILLATOR
IC991 STK7309 POWER REG
Q901
2SC2230 Ⓨ
VOLTAGE REG
115 VOLT
TP-8A
TP-8B
H-HOLD
GND
HP
PCB-CONTROL

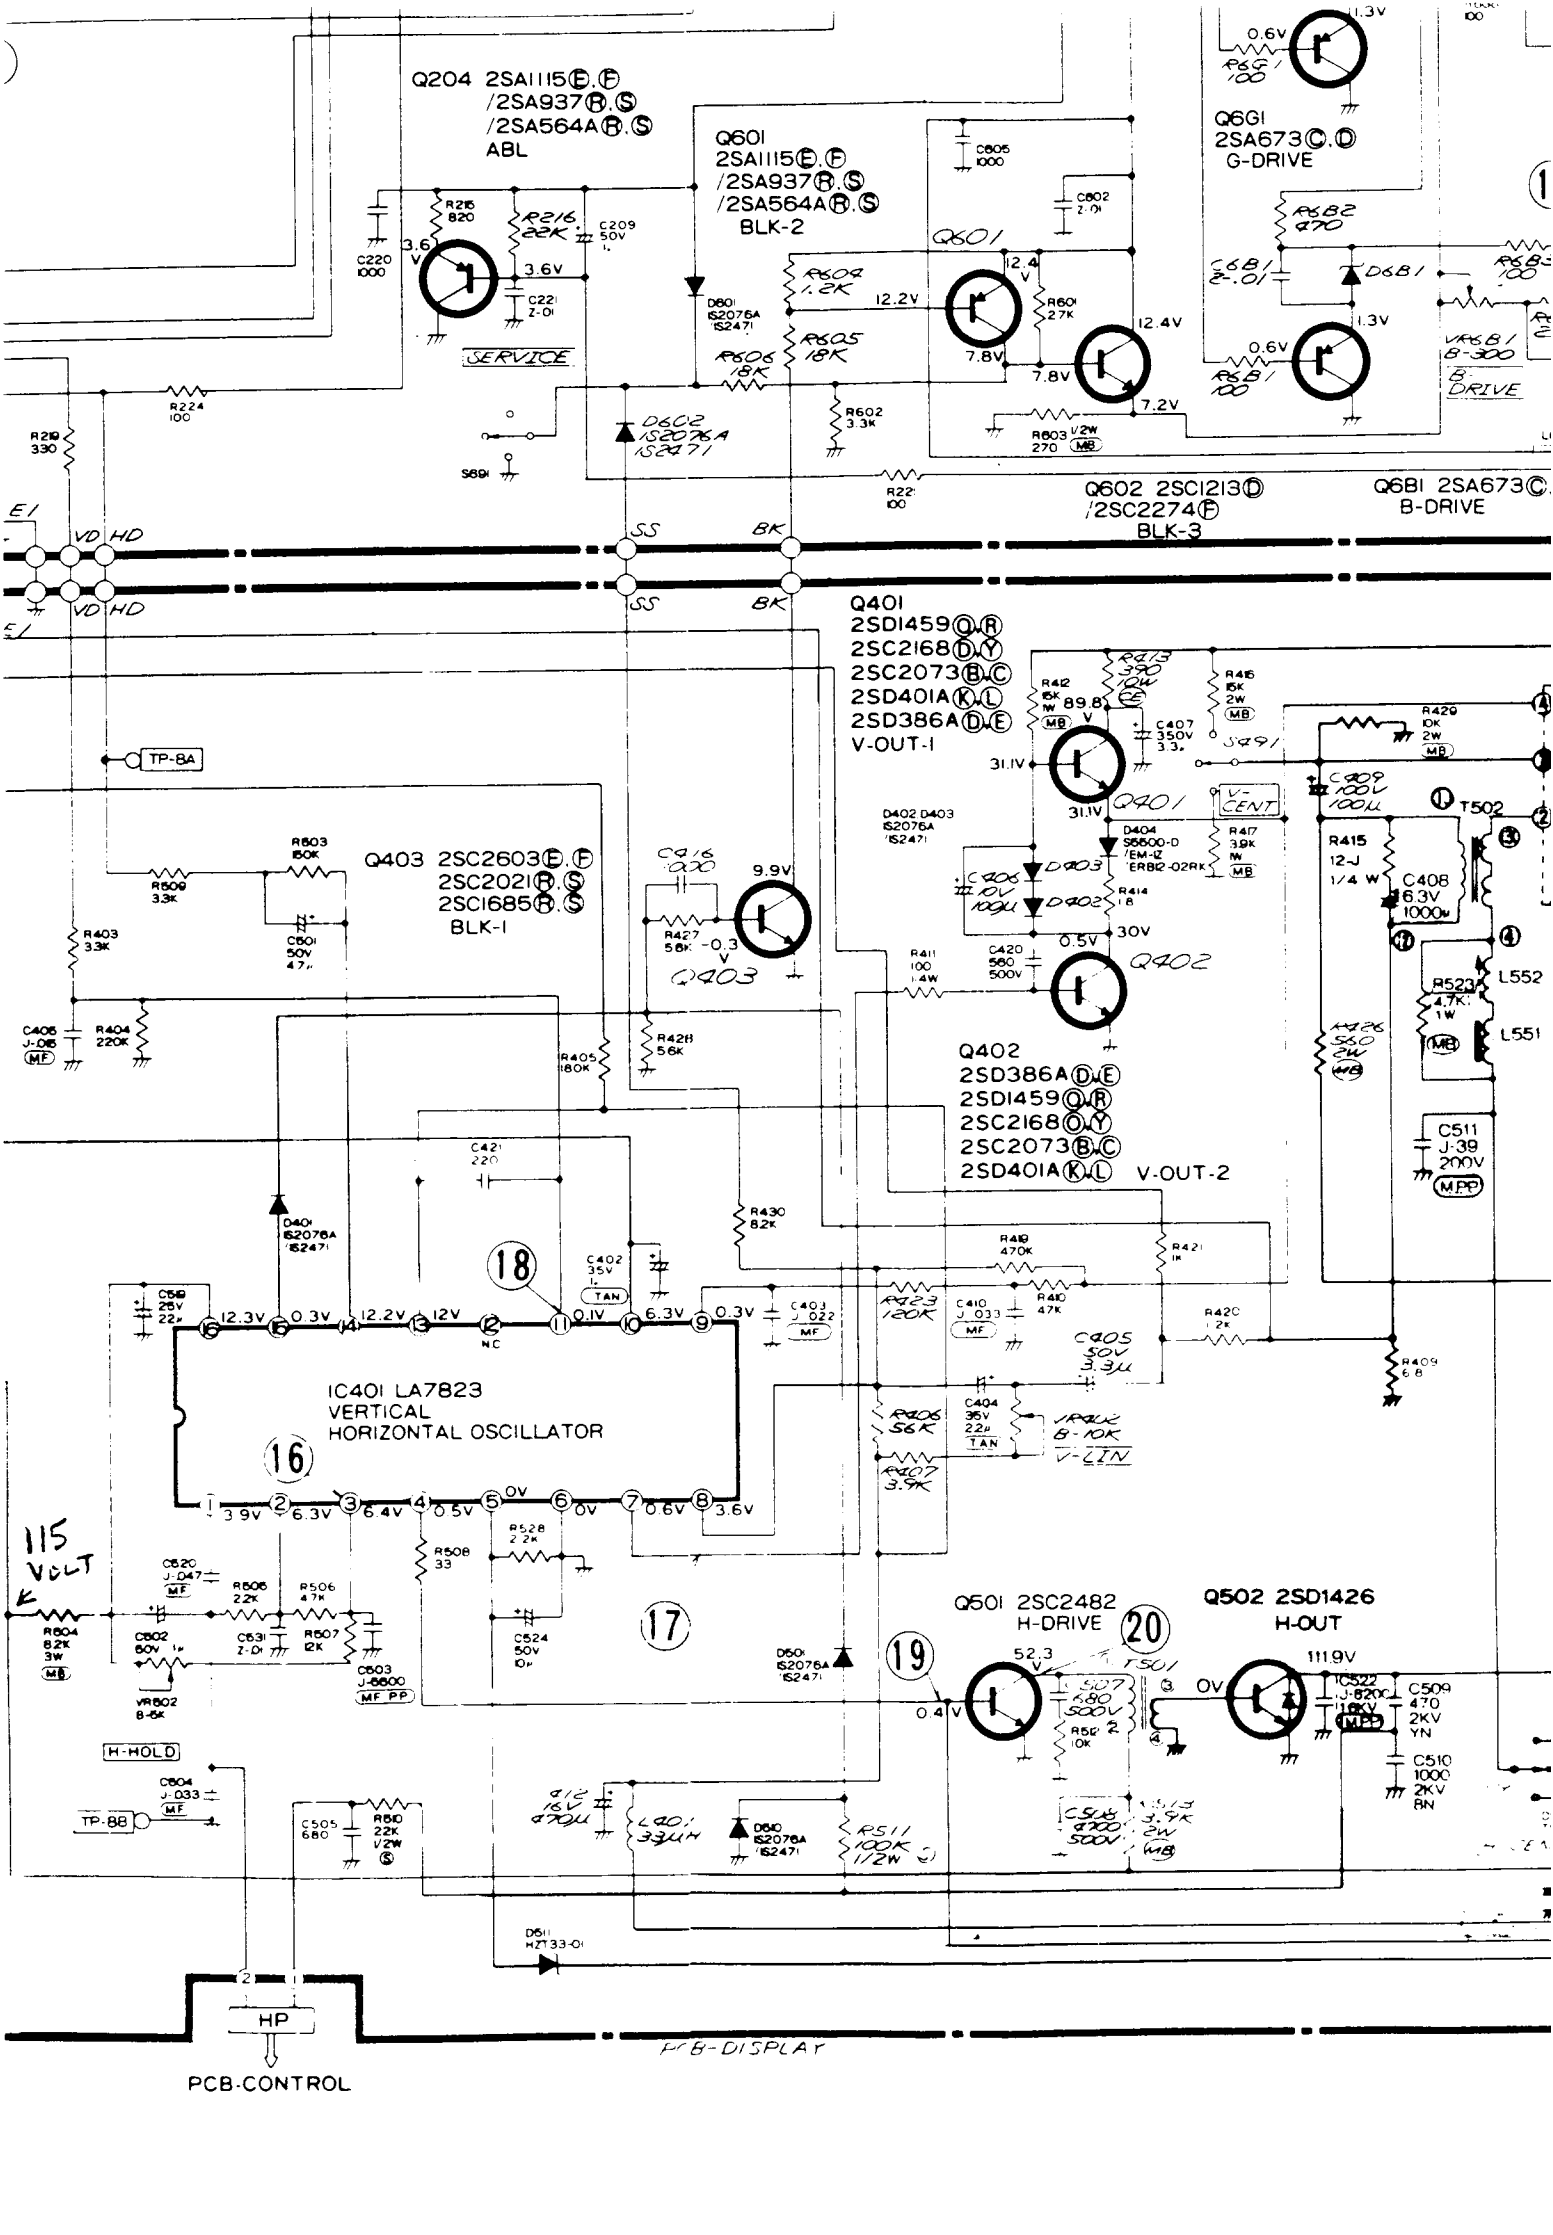
Q204 2SA1115(E,F) /2SA937(R,S) /2SA564A(R,S) ABL
Q601 2SA1115(E,F) /2SA937(R,S) /2SA564A(R,S) BLK-2
SERVICE
Q601
Q602 2SC1213(D) /2SC2274(F) BLK-3
Q681 2SA673(C,D) B-DRIVE
Q681 2SA673(C,D) G-DRIVE
B-DRIVE
Q401 2SD1459(Q,R) 2SC2168(O,Y) 2SC2073(B,C) 2SD401A(K,L) 2SD386A(D,E) V-OUT-1
V-CENT
Q402 2SD386A(D,E) 2SD1459(Q,R) 2SC2168(O,Y) 2SC2073(B,C) 2SD401A(K,L) V-OUT-2
Q403 2SC2603(E,F) 2SC2021(R,S) 2SC1685(R,S) BLK-1
IC401 LA7823 VERTICAL HORIZONTAL OSCILLATOR
Q501 2SC2482 H-DRIVE
Q502 2SD1426 H-OUT
T501
T502
L552
L551
115 VOLT
H-HOLD
TP-8A
TP-8B
HP
PCB-CONTROL
PCB-DISPLAY
VD HD SS BK

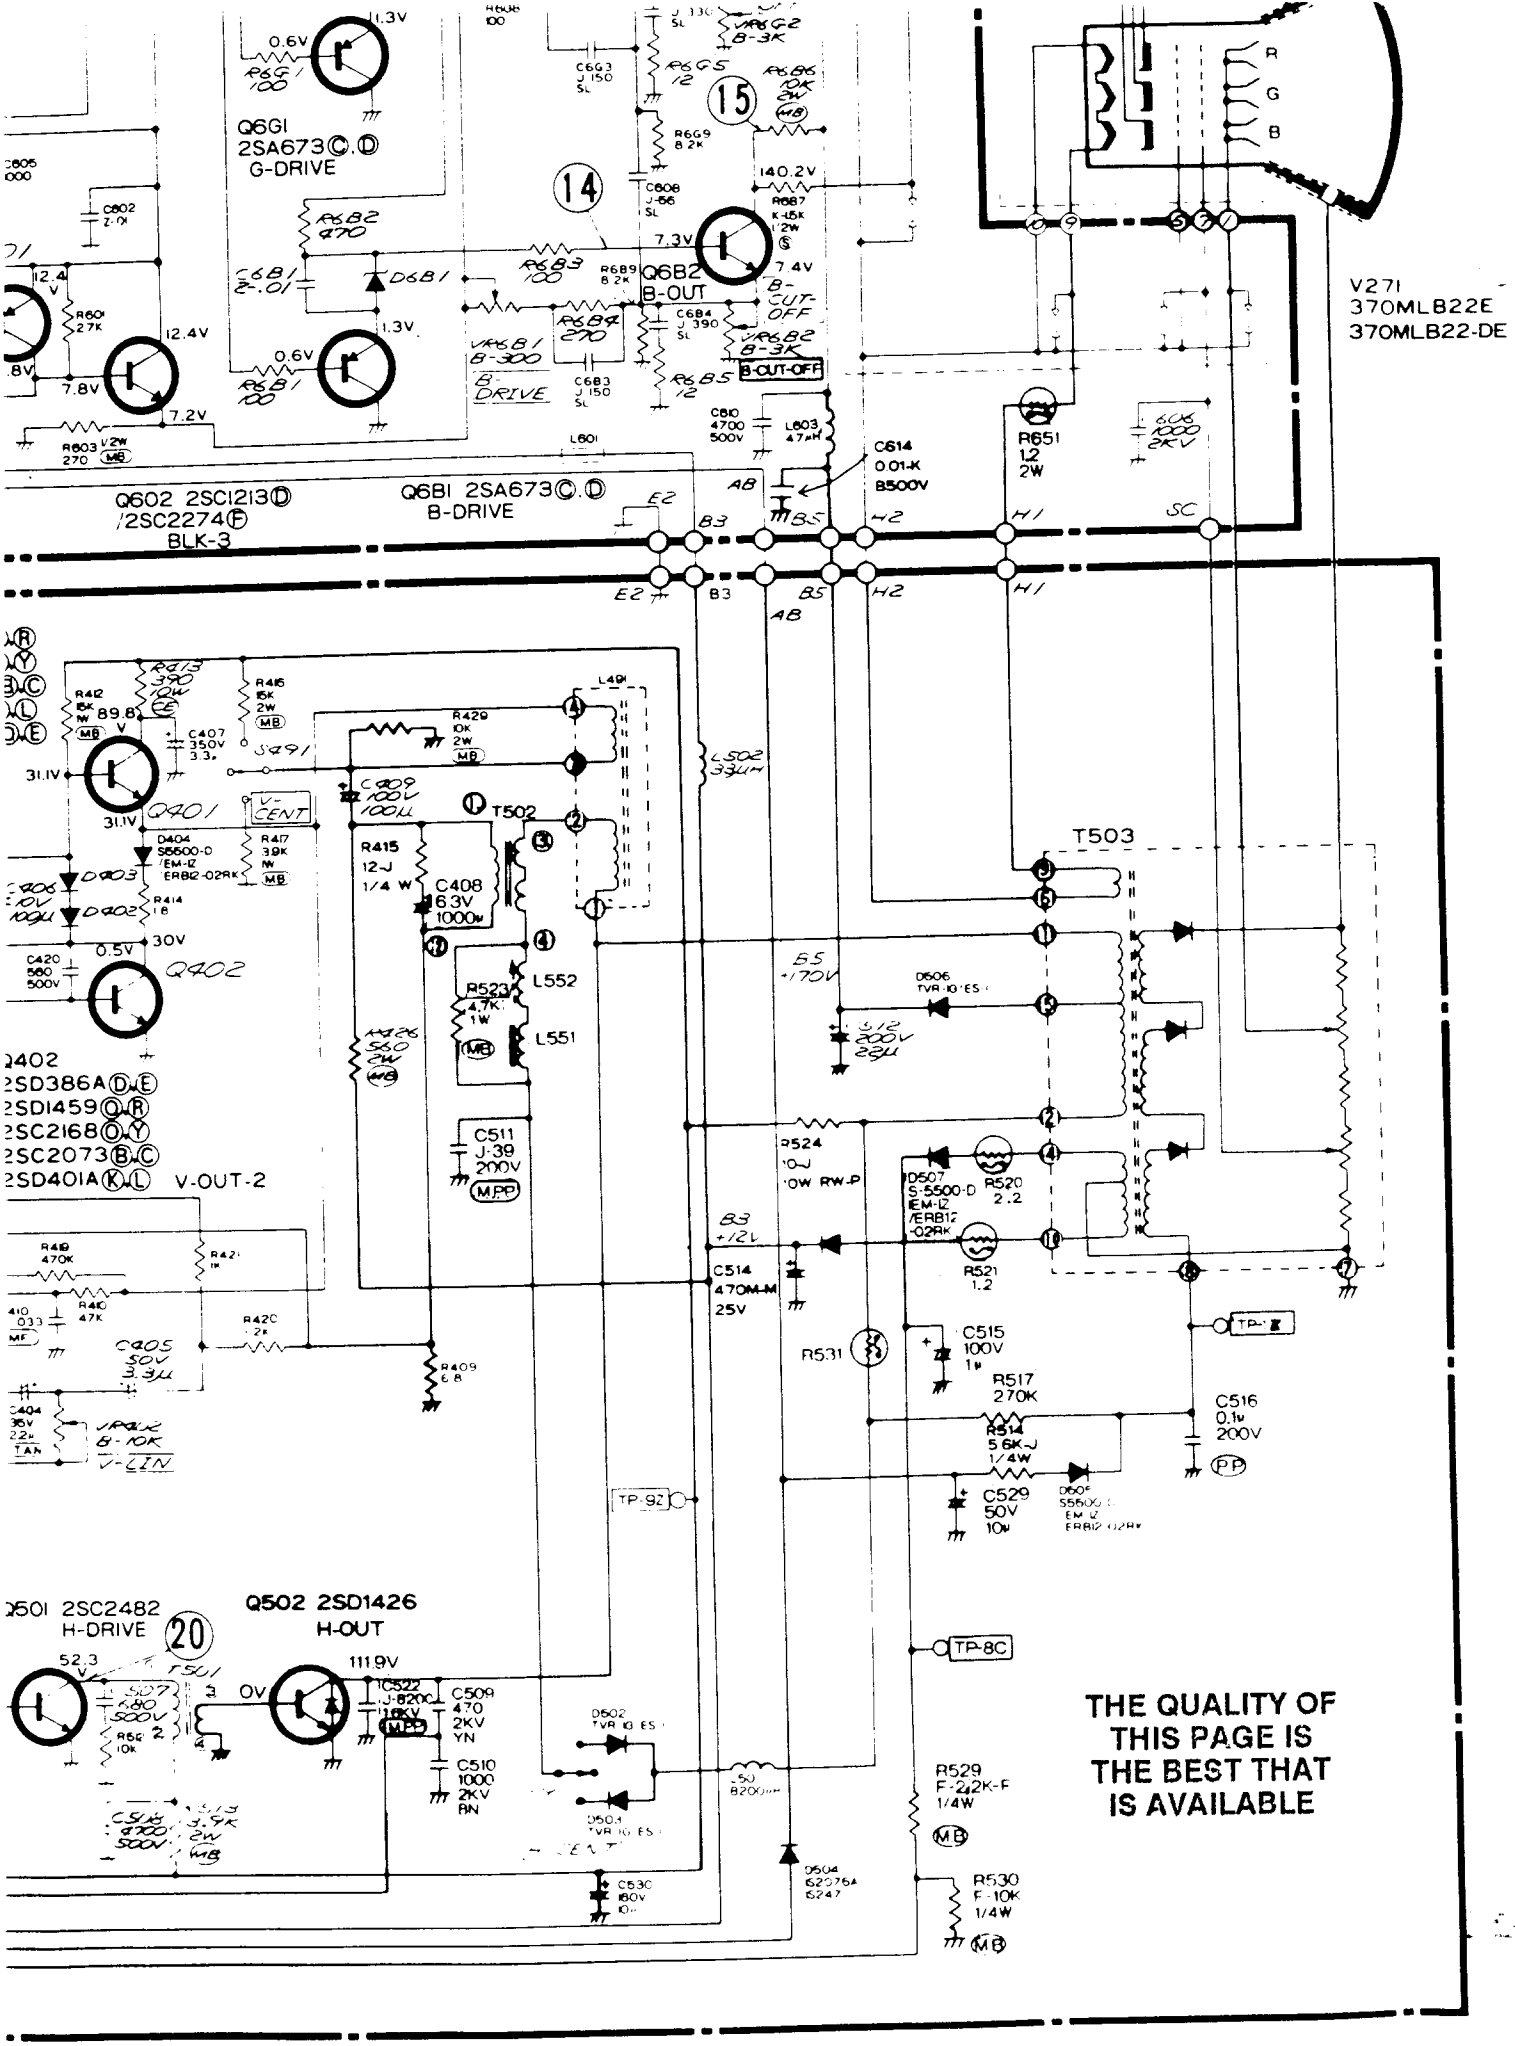
Q6GI 2SA673©.D G-DRIVE
Q6BI 2SA673©.D B-DRIVE
Q6B2 B-OUT
B-CUT-OFF
B-OUT-OFF
B-DRIVE
Q602 2SC1213D /2SC2274F BLK-3
V271 370MLB22E 370MLB22-DE
R651 1.2 2W
C614 0.01-K B500V
T502
T503
L552
L551
Q401
Q402
V-CENT
V-OUT-2
Q501 2SC2482 H-DRIVE
Q502 2SD1426 H-OUT
TP-92
TP-8C
THE QUALITY OF THIS PAGE IS THE BEST THAT IS AVAILABLE

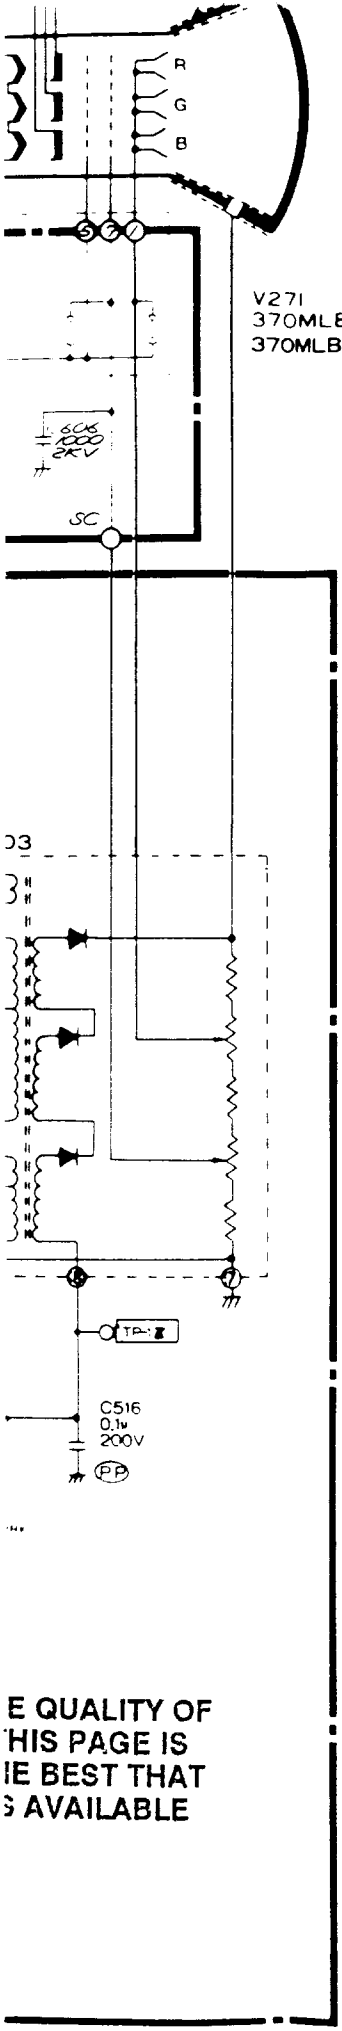

MB	:	Metal oxide film resistor (type B)
MPC	:	Metal plate cement resistor
S	:	Fixed composition resistor
W	:	Wire wound resistor
M	:	Metal film resistor

5. The tolerance of resistor value, if not specifically designated, is: J ±5%, K ±10%, M ±20%
6. The unit of capacitance, if not specifically designated, is:
   a) μF, for numbers less than 1
   b) PF, for numbers more than 1
7. Capacitors, if not specifically designated are Ceramic capacitors except electrolytic capacitors.
8. The marks of capacitors are as follows

ALM	:	Aluminus electrolytic capacitor
MF	:	Polyester capacitor
PP	:	Polypropylene film capacitor
TAN	:	Tantalum capacitor
TF	:	Twin film capacitor
MF.PP	:	Polyester polypropylene film capacitor
MPP	:	Metallize plastic film capacitor
NP	:	Non polarized electrolytic capacitor
	:	Electrolytic capacitor

9. The DC working voltage of capacitor, if not specifically designated is: 50V
10. The tolerance of capacitor value, if not specifically designated is: ±10% for polyester capacitor
    ±5% for ceramic capacitor
    and J = ±5% K = ±10% M = ±20% P = $^{+100\%}_{-0\%}$
    C = ±0.25PF D = ±0.5PF F = ±1PF Z $^{+80\%}_{-20\%}$

SPECIFIC SYMBOL	
Zener Diode	Varistor
Varicap	Crystal unit
Posistor	Air Gap
Thermistor	Part (resistor) attached on the copper foil side of PCB
Fusible Resistor	Ceramic filter

NOTE 2:

1. DC voltages were measured from points indicated to the circuit ground with a VTVM.
2. Number in circle indicates waveform number.
3. This is a basic schematic diagram. Some sets may be subject to modification according to engineering improvement.

E QUALITY OF
HIS PAGE IS
IE BEST THAT
S AVAILABLE

THE QUALITY OF
THIS PAGE IS
THE BEST THAT
IS AVAILABLE